



[Union Pacific Rules](#)

Safety Rules

Effective 0900 Monday July 30, 2007

Includes Updates as of April 29, 2011.

© Copyright Union Pacific Railroad Company 1869 - 2010

These rules supersede all previous rules and instructions inconsistent therewith. Employees whose duties are in anyway affected must comply with and provide themselves with a copy.

PB-20369

List of Rules deployed since 10/15/2007.

RULE	WEB BOOK UPDATED
70.1	06/21/09
70.3	11/17/08
70.8	07/23/10
70.19	11/17/08
70.22	06/21/09
71.2.3	06/21/09
71.5.2	01/28/11
71.6	04/07/10

71.8	11/17/08
74.2.1	04/29/11
74.3	11/17/08
74.11	04/07/10
76.11	04/07/10
76.13	04/07/10
76.24	11/17/08
79.2.3	11/17/08
79.3.1	08/09/10 #
80.6	04/29/11
81.1.2	04/07/10
81.2.1	06/21/09
81.2.2	04/07/10
81.5.4	07/23/10
81.5.5	10/22/10 *
81.7	10/22/10 #
81.7.1	11/17/08
81.7.4	11/17/08
81.7.4.1	11/17/08
81.7.5	11/17/08
81.7.7	11/17/08
81.8.1	11/17/08
81.8.3	11/17/08
81.10	04/29/11 *
81.11	11/17/08

81.13	11/17/08
81.13.1	11/17/08
81.13.3	11/17/08
81.13.8	04/07/10
81.15	11/17/08
81.19	04/07/10
81.23	11/17/08
83.1.2	06/21/09
83.1.3	06/21/09
83.1.8	03/03/09
90.3	03/01/11*
90.4	03/01/11*
Glossary	04/07/10

Note: A rule can be changed and redeployed for a number of reasons including; System General Order, correct a typo, modify page formatting.

* No system general order issued

Corrected chapter file deployment issue

- [Statement of Safety Policy](#)
- [70.0: GENERAL SAFETY INSTRUCTIONS](#)
- [71.0: PERSONAL PROTECTIVE EQUIPMENT](#)
- [72.0: FIRE PREVENTION](#)
- [73.0: EXPLOSIVES](#)
- [74.0: AUTOMOTIVE EQUIPMENT](#)
- [75.0: MATERIAL HANDLING](#)
- [76.0: TOOLS AND MACHINERY](#)
- [77.0: MECHANICAL LIFTING/PULLING OPERATIONS](#)
- [78.0: ELECTRICAL](#)
- [79.0: WELDING](#)
- [80.0: WALKING/WORKING SURFACES](#)
- [81.0: WORKING AROUND TRACKS OR BEING ON EQUIPMENT](#)

- [82.0: HANDLING SWITCHES AND DERAILS](#)
- [83.0: INTERMODAL RAMP RULES](#)
- [90.0: POLICIES AND PROGRAMS](#)
- [Glossary](#)
- [Index](#)

Statement of Safety Policy

- [Statement of Safety Policy](#)

Statement of Safety Policy

It is the policy of the Union Pacific Railroad that its operations be conducted in a safe manner. As integral parts of this policy, the management of Union Pacific Railroad believes that:

- All injuries can be prevented.
- Management and employees at all levels are responsible for maintaining safe working conditions and preventing personal injuries.
- Carrying out work functions in a safe manner is equally as important as meeting deadlines, production schedules, and other non-safety criteria.

[^Top](#)

Updated: 4/28/2010

70.0: GENERAL SAFETY INSTRUCTIONS

- [70.1: Safety Responsibilities](#)
- [70.2: System Safety Policies](#)
- [70.3: Job Briefing](#)
- [70.4: Lifting and Moving Material](#)
- [70.4.1: Steps to Safe Lifting](#)
- [70.4.2: Lifting with Two or More Employees](#)

- [70.5: Protection of Body Parts](#)
- [70.5.1: Safety Around Machines and Equipment](#)
- [70.6: Door or Hatch](#)
- [70.7: Building Safety](#)
- [70.7.1: Filing Cabinets](#)
- [70.7.2: Drawers](#)
- [70.7.3: Paper Cutters](#)
- [70.7.4: Defects](#)
- [70.7.5: Cords](#)
- [70.7.6: Chairs and Benches](#)
- [70.8: When Warning Traffic at Grade Crossings](#)
- [70.9: Removal of Unauthorized Persons](#)
- [70.10: Criminal Activity](#)
- [70.11: Housekeeping](#)
- [70.12: Protruding Nails](#)
- [70.13: Turning on Power](#)
- [70.14: Warning Signs](#)
- [70.15: Compressed Air/gas](#)
- [70.16: Drop or Throw Objects](#)
- [70.17: Rail Under Tension](#)
- [70.18: Fusees Storage](#)
- [70.19: Fusee Use](#)
- [70.20: Confined Space Entry](#)
- [70.21: Air Contaminants](#)
- [70.21.1: Internal Combustion Engines](#)

- [70.22: Spills](#)
- [70.23: Skin Protection](#)
- [70.24: Hazard Communication Standard](#)
- [70.25: Drums and Containers](#)
- [70.26: Working with Refrigeration Systems](#)

70.1: Safety Responsibilities

Employees must:

- Be responsible for their personal safety and accountable for their behavior as a condition of employment,
- Take every precaution to prevent injury to themselves, other employees, and the public,
- Comply with all rules, policies, and outstanding instructions,
- Report, correct, or protect any unsafe condition or practice,
- Be aware of their surroundings and maintain situational awareness to avoid risks associated with required tasks and work within the limits of their physical capabilities and do not use excessive force to accomplish tasks.
- Use good judgment when assessing the safety of all tasks to avoid injury or damage to equipment. in fulfilling job responsibilities safely.
- Understand that Union Pacific has empowered each employee to work safely and risk free.

Past practices that do not conform to the rules are unacceptable.

System Special Instruction

70.1 Safety Responsibilities

Change rule to read:

Employees must:

- Be responsible for their personal safety and accountable for their behavior as a condition of employment.
- Take every precaution to prevent injury to themselves, other employees, and the public.
- Comply with all rules, policies, and outstanding instructions.
- Report, correct, or protect any unsafe condition or practice.
- Be aware of their surroundings and maintain situational awareness to avoid risks associated with required tasks and work within the limits of their physical capabilities and do not use excessive force to accomplish tasks.
- Use good judgment when assessing the safety of all tasks to avoid injury or damage to

equipment.

- Understand that Union Pacific has empowered each employee to work safely and risk free.

Past practices that do not conform to the rules or place an employee at risk are unacceptable.

[^Top](#)

70.2: System Safety Policies

Several Safety Rules make reference to policies contained in company publications such as the ***Safety Resource Manual and the Environmental, Law, Policies and Procedures Manual***. Other company or departmental policies are also in effect. Employees must be trained and be conversant with applicable policies and procedures related to their duties, and be governed by them. Employees will have access to this information available through their local manager.

Note: See ***Rule 1.13, Reporting and Complying With Instructions***.

[^Top](#)

70.3: Job Briefing

Use the Job Briefing process:

- Before work begins, when all persons, including employees and contractors, are present.
- After work begins, if person(s) arrive who missed the original job briefing.
When changes occur to the work plan or conditions change.
- When working in groups. Be aware of the work and movement of other group members and equipment.
- As an avenue to discuss actions having the potential to place employees at risk and develop alternatives to accomplish such tasks safely.

Each work plan must consider hazards, assign specific responsibilities, and explain those assignments.

Plan the Job Briefing:

- A. Develop your own work plan.
- B. Use the job briefing check list when applicable.
 - Complete the check list as required.
 - Sign the check list as required.
- C. Consider existing and potential hazards that might be involved as a result of:
 - Job and weather.
 - The nature of the work to be done.
 - The job location.
 - The tools, equipment, and materials used.
 - Safety or personal protective equipment required.
- D. Consider how work assignments will be made:
 - Group assignments and/or individual assignments.
 - Abilities and experience of individuals.

Conduct the Job Briefing.

- A. Discuss existing or potential hazards and ways to eliminate or protect against them.
- B. Make definite work assignments. (Make sure employees understand assignments.)
- C. If special tools, materials, equipment or methods are to be used, make sure employees know how to proceed safely.
- D. Issue all instructions clearly and concisely; check to see that they are understood.
- E. For complex jobs:
 - Brief only a portion of the job.
 - Give additional briefing as the job progresses.

Use the Job Briefing process:

- Before work begins, when all persons, including employees and contractors, are present.

- ~~After work begins, if person(s) arrive who missed the original job briefing.~~
- ~~When changes occur to the work plan or conditions change.~~
- ~~When working in groups be aware of the work and movement of other group members and equipment.~~

~~Each work plan must consider hazards, assign specific responsibilities, and explain those assignments.~~

Note: See ~~***System Special Instructions Item 17, Job Briefing.***~~

System Special Instruction

70.3 Job Briefing

Change rule as follows:

Use the Job Briefing process:

- Before work begins, when all persons, including employees and contractors, are present.
- After work begins, if person(s) arrive who missed the original job briefing.
- When changes occur to the work plan or conditions change.
- When working in groups. Be aware of the work and movement of other group members and equipment.
- As an avenue to discuss actions having the potential to place employees at risk and develop alternatives to accomplish such tasks safely.

Each work plan must consider hazards, assign specific responsibilities, and explain those assignments.

Plan the Job Briefing:

- A. Develop your own work plan.
- B. Use the job briefing check list when applicable.
 - Complete the check list as required.
 - Sign the check list as required.
- C. Consider existing and potential hazards that might be involved as a result of:
 - Job and weather.
 - The nature of the work to be done.

- The job location.
- The tools, equipment, and materials used.
- Safety or personal protective equipment required.

D. Consider how work assignments will be made:

- Group assignments and/or individual assignments.
- Abilities and experience of individuals.

Conduct the Job Briefing.

A. Discuss existing or potential hazards and ways to eliminate or protect against them.

B. Make definite work assignments. (Make sure employees understand assignments.)

C. If special tools, materials, equipment or methods are to be used, make sure employees know how to proceed safely.

D. Issue all instructions clearly and concisely; check to see that they are understood.

E. For complex jobs:

- Brief only a portion of the job.
- Give additional briefing as the job progresses.

[^Top](#)

70.4: Lifting and Moving Material

Each person is responsible for determining their lifting limitations. Obtain additional help or mechanical assist device(s) to lift or handle heavy or awkward objects.

Observe the following principles of correct and safe lifting:

- ensure secure footing and a good grip on the materials,
- keep the object close to your body,
- keep your upper body erect,
- lift smoothly—do not use jerky motions,
- do not lift and twist at the same time.

[^Top](#)

70.4.1: Steps to Safe Lifting

Observe the following steps when lifting any items:

1. Check the load for size, weight, stability, and grip.
2. Make sure the pathway to be used is clear of obstructions, debris or other conditions which may cause loss of footing.
3. Inspect the unlift areas for a clear unlift, preferably at knuckle height, without reaching.
4. Choose the right lifting technique (e.g., squat, semi-stoop, or balanced one-hand lift).

[^Top](#)

70.4.2: Lifting with Two or More Employees

Conduct a job briefing before beginning a task and define responsibilities and techniques for the type of lift being performed. One individual will give commands for all movements (lifting, walking, lowering, or throwing). Place the individual at one end of the object being lifted. Avoid walking backward.

[^Top](#)

70.5: Protection of Body Parts

Do not place hands, fingers, feet, legs or any part of your body in a position where they might be struck, caught, pinched or crushed.

[^Top](#)

70.5.1: Safety Around Machines and Equipment

Do not enter areas where you could be caught in the operation of machinery or equipment. When tools, equipment or machinery becomes jammed or obstructed in any manner, it must be stopped and lockout / tagout procedures followed.

Note: See ***Safety Resource Manual, Lockout / Tagout Policy, Section IV-H.***

[^Top](#)

70.6: Door or Hatch

When opening or closing a door or hatch, face it and use handle or grab iron. Use care and keep clear of the door side or edge.

Note: See **Rule 81.15, Car Doors** and **Rule 81.20, Moving In and Out of Equipment or On Equipment**.

[^Top](#)

70.7: Building Safety

The following rules apply to all buildings including offices, shops, crew rooms, towers or similar structures.

[^Top](#)

70.7.1: Filing Cabinets

The contents of filing cabinets must be arranged and distributed so as not to make the cabinet top heavy.

[^Top](#)

70.7.2: Drawers

Drawers on file cabinets, desks, tool boxes, etc., must be closed when not in use. Do not have more than one drawer open at one time.

[^Top](#)

70.7.3: Paper Cutters

Exercise caution while operating paper cutters, trimmers and power paper punches.

Keep fingers clear of the cutting blades and make sure blade guards are in position.

Paper cutter blades must be left in the closed position and secured after use.

[^Top](#)

70.7.4: Defects

Report sharp edges, splinters or defective parts on office furniture or equipment so repairs can be made. If unsafe, appropriate action must be taken.

[^Top](#)

70.7.5: Cords

Permanent installations of equipment with cords (telephone, electrical, computer, etc.) that are in walking areas must be encased. Action must be taken to protect temporary installations.

[^Top](#)

70.7.6: Chairs and Benches

Do not stand on chairs and benches. Unsafe chairs or benches must not be used.

Chairs must not be repaired or altered in any way except by an authorized repair service.

While seated in a chair, all chair legs must remain in contact with the floor.

[^Top](#)

70.8: When Warning Traffic at Grade Crossings

When required to be on the ground at a grade crossing to warn traffic of an approaching movement, the employee must be in a safe location to avoid injury. Do not stand in traffic lanes.

~~When required to be on a grade crossing to warn traffic of an approaching movement, the employee must be in a safe location to avoid injury if the motorist fails to heed the warning. Do not stand in traffic lanes unless traffic has come to a stop.~~

~~Do not motion vehicles to proceed over grade crossings, except as provided in Chief Engineer's Instruction Bulletins and as per Rule 74.12, Railroad Crossing.~~

General Order

Change rule to read:

When required to be on the ground at a grade crossing to warn traffic of an approaching movement, the employee must be in a safe location to avoid injury. Do not stand in traffic lanes.

[^Top](#)

70.9: Removal of Unauthorized Persons

Unauthorized persons or trespassers on company property must be told to leave the premises, unless confronting the person(s) would be unsafe. If the person(s) refuse to leave, or if confronting the person(s) would be unsafe, request immediate assistance from Railroad Police or local law enforcement authorities. When feasible, Railroad Police must be advised of all unauthorized persons or trespassers on company property.

[^Top](#)

70.10: Criminal Activity

Immediately contact Railroad Police or local law enforcement authorities to report any type of criminal activity or suspected criminal activity on company property. This includes, but is not limited to, trespassing, theft, burglary, assault, vandalism, switch tampering and arson.

[^Top](#)

70.11: Housekeeping

Good housekeeping must be maintained at all times. Dispose of garbage, water bottles, used batteries, or other refuse material (such as sun flower seeds, smoke-less tobacco residues, cigarette butts, etc.) in a proper manner and in appropriate disposal receptacles. Do not discard aerosol cans in containers that may be incinerated. Company refuse facilities are not to be used for personal use.

Do not place or allow tools, equipment or other materials to remain on floors, stairways, or walkways where they could cause a slip, trip or fall.

Note: See **Rule 1.24, Clean Property.**

[^Top](#)

70.12: Protruding Nails

Remove or flatten protruding nails or screws when removing boards or timbers or when you notice protruding nails or screws while performing duties.

[^Top](#)

70.13: Turning on Power

Inspect affected areas and ensure it is safe before turning on electricity, gas, steam, fuel oil, air, water or putting any machinery in operation.

[^Top](#)

70.14: Warning Signs

Label damaged or defective machines, switches, valves, or other apparatus with a danger sign, tag, or banner. Danger signs must be placed at locations where there are exposed energized circuits. Only authorized personnel may remove the sign when safe conditions are restored. Do not operate machines, switches, valves, or other apparatus with attached danger signs, tags, or banners.

[^Top](#)

70.15: Compressed Air/gas

Use of compressed air or any gas to blow dust or dirt from the body or clothing is prohibited. An air nozzle must not be placed against any portion of the body. Compressed air must not be used for cleaning purposes in shop areas, unless the hose nozzle is of the type which will reduce the pressure to 30 psi or less at the main opening when dead-ended or obstructed.

Inhaling purposely any type of compressed gas not specifically designated for inhalation is prohibited.

[^Top](#)

70.16: Drop or Throw Objects

Do not drop or throw tools, materials or other objects that might cause personal injury, fire, or equipment or property damage.

[^Top](#)

70.17: Rail Under Tension

Close observation must be made to determine whether rail is too tight to safely perform work:

- at point where there has been a derailment,
- in periods of high temperature,
- at location where rail is kinked or damaged,
- before beginning to renew rail or to remove part of fastenings from one or more rails.

[^Top](#)

70.18: Fusees Storage

Fusees must be kept away from high temperatures, fire or open flame and stored:

- in approved containers in motor vehicles and other designated equipment,
- in flagging kits or racks in engines and cabooses,
- in the original shipping container in a storage cabinet.

[^Top](#)

70.19: Fusee Use

Fusees must be:

- only used for signaling or flagging purposes,
- kept away from high temperatures, fire or open flame.

Do not place fusees where they may cause a fire.

Fusees are not to be placed in locations where they may become wet. Fusees showing evidence of having been soaked in water, oil, etc., or otherwise damaged, must not be used and must be disposed of properly.

To the extent practical, fusees must be kept where they cannot be obtained by unauthorized persons. Misuse or horseplay involving fusees is strictly prohibited.

When lighting fusees, hold the end to be lighted down and away from your body, striking away from the body to prevent burns to hands, feet or clothing.

Do not place lighted fusees on open bridge decks, trestles or approaches, or use them near flammable or combustible material.

Extinguish the fusee after giving hand signals.

System Special Instruction

71.19 Fusee Use

Change rule number to read:

70.19 Fusee Use

[^Top](#)

70.20: Confined Space Entry

Observe applicable confined space entry procedures when going into designated confined spaces, such as, sewers, manholes, tanks, pits, etc.

Note: See ***Rule 79.7, Confined Spaces and Safety Resource Manual, Confined Space Entry Program, Section IV-G.***

[^Top](#)

70.21: Air Contaminants

Take precautions to reduce exposure when working around gases, fumes, mists, vapors, or dusts emitted by equipment, vehicles or work processes. Do not enter a suspected or confirmed contaminated area without following prescribed procedures and using required personal protective equipment.

Note: See ***Safety Resource Manual, Respiratory Protection Program, Section IV.E.***

[^Top](#)

70.21.1: Internal Combustion Engines

Avoid excessive exposure to exhaust fumes from internal combustion engines. Such engines must not be allowed to run unless adequate ventilation exists. Do not expose fresh air intake systems to internal combustion engine exhaust.

[^Top](#)

70.22: Spills

70.22: Chemical Spills

Avoid contact with spilled materials, or commodities at accident sites until the materials have been identified and safe handling procedures determined.

If safe to do so, take steps to stop the leak or contain the spillage of ~~In the event of an oil, hazardous material, or environmentally sensitive material spill from any source that will contaminate the ground or a waterway, if safe to do so, take steps to stop or contain the spillage.~~

It is the responsibility of the employee who discovers this spill to immediately notify the appropriate authority and RMCC 888-877-7267 (8-544-7622), advising:

- the location of the spill,
- material and amount spilled,
- distance to nearest public waters,
- any other information that may be pertinent.

If a fire or vapor cloud is visible from an unknown source or one known to be toxic, move yourself and others upwind to a distance of at least one half mile, further if deemed advisable, and contact RMCC at 888-877-7267 (8-544-7622).; ~~until~~

Assist Emergency Response personnel and do not enter the area until ~~have~~ advised that the area is ~~again safe to enter.~~

System Special Instruction

Change tile and rule as follows:

70.22: Spills

Avoid contact with spilled materials, or commodities at accident sites until the materials have been identified and safe handling procedures determined.

If safe to do so, take steps to stop the leak or contain the spillage of oil, hazardous, or environmentally sensitive materials spilled from any source.

It is the responsibility of the employee who discovers this spill to immediately notify the appropriate authority and RMCC 888-877-7267 (8-544-7622), advising:

- the location of the spill,
- material and amount spilled,
- distance to nearest public waters,
- any other information that may be pertinent.

If a fire or vapor cloud is visible from an unknown source or one known to be toxic, move yourself and others upwind to a distance of at least one half mile, further if deemed advisable, and contact RMCC at 888-877-7267 (8-544-7622).

Assist Emergency Response personnel and do not enter the area until advised that the area is safe.

[^Top](#)

70.23: Skin Protection

- Do not clean any part of your body with gasoline, solvents or with oily or dirty rags.
- Do not wear clothing that is contaminated with gasoline, solvents or oils.

[^Top](#)

70.24: Hazard Communication Standard

The Hazard Communication Standard (HCS), also known as Right to Know (RTK) was developed by the Occupational Safety and Health Administration (OSHA). It was designed to

benefit employees and it is the responsibility of all employees to become familiar with and comply with the provisions of the HCS.

Employees must be familiar with the contents of chemical substances they work with as a preventative measure to avoid accidents and injury. Only chemicals, paints, compounds or other products approved by the company will be used. Before handling containers or using chemical substances, employees must be aware of the contents and any hazardous conditions that may exist. They must take all necessary precautions to ensure the safety of themselves and others, and must wear approved protective equipment that may be required.

Note: See ***Safety Resource Manual, Hazardous Communication Program, Section IV-I.***

[^Top](#)

70.25: Drums and Containers

Label all drums, totes, tanks and containers as to contents. Drums must be kept closed, except for immediate use. When opening drums that have been exposed to heat from the sun or other sources, use proper protective equipment, stand in the clear and open slowly until the pressure is released. Do not pour contents of drums or barrels on the ground or in drains. Be certain all contents are disposed of properly. If any doubt should arise as to proper disposal of drum or barrel contents, contact your supervisor. Drums that have bung holes that are recessed or level with the barrel rim must be positioned to the side with the barrel tipped at least one inch to prevent moisture from entering barrel.

Note: See ***Environmental Laws, Policies, and Procedures Manual, Drum Storage, Reuse and Disposal.***

[^Top](#)

70.26: Working with Refrigeration Systems

Only qualified employees shall service or repair refrigeration systems and must follow manufacturer's instructions.

[^Top](#)

Updated: 7/23/2010

71.0: PERSONAL PROTECTIVE EQUIPMENT

- [71.1: General Guidelines](#)
- [71.1.1: Altering Personal Protective Equipment](#)
- [71.2: Hearing Protection](#)
- [71.2.1: Service, Repair and Mechanical Facilities](#)
- [71.2.2: Locomotives](#)
- [71.2.3: Near Retarders](#)
- [71.2.4: Roadway or Work Equipment](#)
- [71.2.5: Jet Blowers or Pile Drivers](#)
- [71.2.6: Other Equipment and Tools](#)
- [71.3: Gloves](#)
- [71.4: Hard Hats](#)
- [71.5: Eye Protection](#)
- [71.5.1: Areas that Require Eye Protection](#)
- [71.5.2: Additional Eye Protection Requirements](#)
- [71.5.3: Contact Lenses](#)
- [71.5.4: Dark Lenses](#)
- [71.6: Proper Attire](#)
- [71.7: Footwear](#)
- [71.7.1: Defined Heel](#)
- [71.7.2: Covers the Ankle](#)
- [71.7.3: OSHA Required Footwear](#)
- [71.7.4: FRA Required Footwear](#)
- [71.7.5: Visitors and Contractors](#)
- [71.8: Respirators](#)

71.1: General Guidelines

Only personal protective equipment (PPE) approved by the Safety Department will be used while on duty and only for the purpose intended. PPE must be used where conditions of the job require and in accordance with rules, instructions, or directions from supervisor. Anyone entering designated areas or working near others wearing PPE must also wear the required PPE. Keep all PPE issued to you in good order, properly fitted and replace as may be required

to maintain intended protection.

[^Top](#)

71.1.1: Altering Personal Protective Equipment

Do not alter or use altered PPE.

Note: See *Safety Resource Manual, Personal Protective Equipment Approval Policy, Section IV-A*.

[^Top](#)

71.2: Hearing Protection

Wear approved hearing protection devices, as specified by manufacturer, in areas designated by signs or outstanding instructions, or as specified by a supervisor. Approved hearing protection devices are stock devices defined in the Personal Protective Equipment Catalog. In some cases, wearing dual protection devices is required, which consist of ear plugs plus muffs.

[^Top](#)

71.2.1: Service, Repair and Mechanical Facilities

Hearing protection is required when working in or around the following service, repair, or mechanical areas:

1. **Car and Locomotive Shop Buildings.** When working in open-sided or enclosed car and locomotive shop buildings.
EXCEPTION: Persons in low noise areas, identified by Safety Department, are not required to wear hearing protection.
2. **Car Repair or Service Track Buildings.** When working in open-sided or enclosed areas where cars are repaired or locomotives are fueled or serviced.
EXCEPTION: When in offices with doors and windows closed, these areas do not require hearing protection.
3. **Load Testing, Sand Blasting, or Grit Blasting Areas.** When working close to or within areas where load testing, sand blasting or grit blasting equipment is in operation.
4. **Mechanical Facilities.** When working in or around mechanical facilities designated by a sign or instructions.

[^Top](#)

71.2.2: Locomotives

Employees must wear hearing protection anytime they are within a radius of 100 feet of a locomotive. However, hearing protection is not required for employees who are inside the cab with the cab doors and windows closed.

[^Top](#)

71.2.3: Near Retarders

Hearing protection is required within 150 feet of master, group, or inert retarders during humping and trimming operations. Dual hearing protection (ear plugs and muffs) is required within 10 feet of these operations.

When near operating retarders:

- Engine windows and doors must be closed when passing through operating retarders. All occupants must be inside the locomotive cab.
- Do not ride a car through operating retarders.

Exception: Hearing protection is not required when riding through or working around Dowty or Inert retarders, unless protection is needed for other purposes.

System Special Instruction

Add "inert" in exception as shown:

Exception: Hearing protection is not required when riding through or working around Dowty or Inert retarders, unless protection is needed for other purposes.

[^Top](#)

71.2.4: Roadway or Work Equipment

Hearing protection is required within 100 feet of operating roadway or work equipment.

[^Top](#)

71.2.5: Jet Blowers or Pile Drivers

Hearing protection is required within 150 feet of operating jet blowers or pile drivers.

[^Top](#)

71.2.6: Other Equipment and Tools

Hearing protection is required when operating or within 15 feet of any of the following equipment or tools in operation:

- Welding or cutting equipment (oxy-fuel, gas, or electric).
- Abrasive wheel grinder or sander (pedestal, bench, or portable).
- Air lance or nozzle (for blowing compressed air).
- Chain saw.
- Nail gun (air or powder-actuated).
- Power saw, planer, router, or joiner.
- Equipment or tools powered by:
 - Air
 - Combustion engine
 - Electricity
 - Hydraulic
 - Pneumatic
 - Steam

Note: See ***Safety Resource Manual, Hearing Conservation Program, Section IV-D.***

[^Top](#)

71.3: Gloves

Use appropriate hand protection when hands are exposed to:

- skin absorption of harmful substances,
- cuts, lacerations or abrasions,
- punctures,
- chemicals,
- temperature extremes.

Note: See Safety Resource Manual, Personal Protective Equipment Approval Policy (6.0 Hand Protection), Section IV-A.

71.4: Hard Hats

Hard hats must be worn at all Locomotive, Car and Maintenance of Way facilities and work sites and in other designated hard hat areas as specified by department head.

Hard hat is not required in:

- office areas and lunch rooms,
- vehicles or equipment that provide overhead protection against falling objects,
- areas exempted with documentation by the appropriate department head.

Only liners that do not interfere with fit and function of the hard hat can be worn. Baseball or similar type caps must not be worn under hard hats. Altering of hard hats or hard hat suspensions is prohibited. Hard hats must not be worn backwards, unless attachments being used are designed for such use and suspension is reversed.

Bump caps will not be used to fulfill hard hat requirements.

Exceptions:

1. A track welder, wearing a Powered Air Purifying Respirator (PAPR), will not be required to wear a hard hat when working in areas where there is no potential for injury to the head from falling objects.
2. Transportation employees are not required to wear hardhats when:
 - moving locomotives to or from locomotive service areas,
 - spotting cars within car or maintenance of way repair facilities.

Note: See ***Safety Resource Manual, Personal Protective Equipment Approval Policy (4.0 Head Protection), Section IV-A.***

71.5: Eye Protection

Wear company-approved eye protection in all designated areas or when specified by the appropriate department head. It is not required in:

- office areas and lunch rooms,

- enclosed vehicles (including locomotives).

[^Top](#)

71.5.1: Areas that Require Eye Protection

Safety Glasses. Wear spectacle-type, 100-percent safety glasses with side shields when on duty at locomotive or car repair and servicing facilities and maintenance of-way work sites, shops, and facilities. Employees requiring corrective lenses must wear either company-approved prescription safety glasses or coverall-type safety goggles.

Other Glasses. As designated by the department head (Vice President Transportation), train, engine, yard and all other personnel on company property and on duty must wear glasses (FDA-approved or ANSI Z87.1-approved) They must be spectacle-type glasses that cover the entire eye area (no half glasses or granny glasses).

[^Top](#)

71.5.2: Additional Eye Protection Requirements

Rule 71.5.2 Additional Eye Protection Requirements

Change rule to read:

Specific work activities may require additional eye protection. Go to Safety Department web site "Safety Resource Manual, Personal Protective Equipment Policy (Assessment of Personal Protective Equipment), Section IV - A", for application of this rule to other specific tasks.

~~Wear additional eye protection when performing specific work activities and follow any additional procedures specified in outstanding instructions or rules:~~

Task or Condition	Protection Required
Handling acids and caustics	<ul style="list-style-type: none"> • Splash goggles with face shield
Fueling locomotives or work equipment	<ul style="list-style-type: none"> • Splash goggles, or • Face shield with safety glasses

<p>Using powered chip-producing equipment (i.e., grinders, buffers, chippers, scalers, or railsaws) or chipping slag</p>	<ul style="list-style-type: none"> • Face shield with dust goggles, or • Welding helmet with clear lens
<p>Using or observing electric arc welding</p>	<ul style="list-style-type: none"> • Proper helmet with proper lens shade and safety glasses
<p>Dusty environment created by windy condition</p>	<ul style="list-style-type: none"> • Dust goggles as needed • Pyramex safety glasses
<p>Removing components or working overhead when dust and debris may become loose; dust and debris, or the potential for such, in the facial area when using impact tools; sanding locomotives</p>	<ul style="list-style-type: none"> • Dust goggles required
<p>Using explosive-charged tools</p>	<ul style="list-style-type: none"> • Dust goggles, or • Face shield with safety glasses
<p>Using chain saw</p>	<ul style="list-style-type: none"> • Dust goggles, or • Face shield with safety glasses
<p>Thermit welding and applying Cadwell bonds</p>	<ul style="list-style-type: none"> • See Rule 79.28 (Thermit Welding)

Jump starting batteries with booster cables	<ul style="list-style-type: none"> • Safety glasses required. Face shield recommended.
Using a pick	<ul style="list-style-type: none"> • <u>Face shield with safety glasses</u>
Using a spike maul or sledge hammer to strike other metal objects	<ul style="list-style-type: none"> • <u>Face shield with safety glasses</u>

Note 1: Reference Safety Resource Manual, Personal Protective Equipment Policy (Assessment of Personal Protective Equipment), Section IV-A, for application of this rule to other specific tasks.

Note 2: It is essential that a good fit between the face and the contact surfaces of goggles is maintained. Safety glasses are not required when goggles are used.

System Special Instruction

Rule 71.5.2 Additional Eye Protection Requirements

Change rule to read:

Specific work activities may require additional eye protection. Go to Safety Department web site "Safety Resource Manual, Personal Protective Equipment Policy (Assessment of Personal Protective Equipment), Section IV - A", for application of this rule to other specific tasks.

~~71.5.2 Additional Eye Protection Requirements~~

~~Add as part of second entry in table "or work equipment".~~

~~Add two additional entries to table as shown.~~

Using a pick	<ul style="list-style-type: none"> • Face shield with safety glasses

~~Using a spike-
maul or sledge-
hammer to strike
other metal
objects~~

- ~~• Face shield with safety-
glasses~~

General Order

Rule 71.5.2 Additional Eye Protection Requirements

Change rule to read:

Specific work activities may require additional eye protection. Go to Safety Department web site "Safety Resource Manual, Personal Protective Equipment Policy (Assessment of Personal Protective Equipment), Section IV - A", for application of this rule to other specific tasks.

[^Top](#)

71.5.3: Contact Lenses

Do not wear contact lenses when working in areas where wind, dust, and other foreign matter constitute a hazard or when chemicals may cause a splash, mist, or vapor hazard.

[^Top](#)

71.5.4: Dark Lenses

The wearing of dark lenses under insufficient lighting conditions is prohibited, except when engaged in an operation requiring dark lenses.

Note: See ***Safety Resource Manual, Personal Protective Equipment Approval Policy (2.0 Eye and Face Protection), Section IV-A. and Safety Resource Manual, Eye Protection Policy, Section IV-B.***

[^Top](#)

71.6: Proper Attire

71.6 Proper Attire

Wear clothing that allows you to perform your duties efficiently and safely.

Clothing must not:

- Interfere with vision, hearing and free use of hands and/or feet.
- Block peripheral vision. When hooded sweatshirts and/or coats or similar type clothing are worn, they must be secured around the face to prevent the blocking of peripheral vision.
- Be torn, baggy, or ragged.
- Be so loose that it will snag easily or catch on cars, engines, tools, machinery or other equipment but must allow freedom of movement.
- Be worn so it creates the possibility of being caught or may affect one's safe performance of their duties i.e. neckties or similar clothing.

Shirts must:

- Have at least quarter-length sleeves and cover the back, shoulders, chest and abdomen.
- Provide protection from sun, insects, abrasions or scratches.
- Be buttoned. Anyone working around equipment or moving machinery in which a shirt might become entangled must have their shirt tails tucked into their trousers.

When working outside, employees must wear:

- Trousers which cover the legs.
- ANSI Class II/III highly visible outer wear:
 - Engineering employees must wear orange outer wear with reflective striping.
However:
 - o Welders must wear required protective clothing when welding.

- o Lookouts must wear yellow/green vest with orange reflectorized striping , with "Lookout" printed on the vest. All other employees must wear green/yellow outer wear with reflective striping. However, remote control operators working as a RCO may wear an orange RCO vest.

Exception: Highly visible outer wear is not required when in:

- * Office areas and lunch rooms.
- * Enclosed vehicles (including locomotives).
- * Parking lots when tracks will not be fouled.
- * Areas specifically designated by the department head.

Note: Vests used by employees working on railroad cars and engines must be the 5-point, tear-away vests certified for use by Union Pacific.

~~Orange RCO vest may also be worn as outer wear.~~ Exception: Highly visible outer wear is

~~not required when:~~

- ~~• Inside the cab of a locomotive, inside a company or contract vehicle, and when tracks will not be fouled while walking to or from buildings or vehicles.~~
- ~~• Mechanical employees are working within designated repair / servicing areas.~~

Jewelry that may affect one's safe performance of their duties must not be worn.

Hair, including beards, must be worn in a manner to permit safe performance of duties.

System Special Instruction

Change rule to read:

Wear clothing that allows you to perform your duties efficiently and safely.

Clothing must not:

- Interfere with vision, hearing and free use of hands and/or feet.
- Block peripheral vision. When hooded sweatshirts and/or coats or similar type clothing are worn, they must be secured around the face to prevent the blocking of peripheral vision.
- Be torn, baggy, or ragged.
- Be so loose that it will snag easily or catch on cars, engines, tools, machinery or other equipment but must allow freedom of movement.
- Be worn so it creates the possibility of being caught or may affect one's safe performance of their duties i.e. neckties or similar clothing.

Shirts must:

- Have at least quarter-length sleeves and cover the back, shoulders, chest and abdomen.
- Provide protection from sun, insects, abrasions or scratches.
- Be buttoned. Anyone working around equipment or moving machinery in which a shirt might become entangled must have their shirt tails tucked into their trousers.

When working outside, employees must wear:

- Trousers which cover the legs.
- ANSI Class II/III highly visible outerwear:
 - - Engineering department employees must wear orange outerwear with reflective striping. However:
 - o Welders must wear required protective clothing when welding.
 - o Lookouts must wear yellow/green vest with orange reflectorized striping , with

"Lookout" printed on the vest.

- All other employees must wear green/yellow outer wear with reflective striping. However, remote control operators working as a RCO may wear an orange RCO vest.

Exception: Highly visible outer wear is not required when in:

- Office areas and lunch rooms.
- Enclosed vehicles (including locomotives).
- Parking lots when tracks will not be fouled.
- Areas specifically designated by the department head.

Note: Vests used by employees working on railroad cars and engines must be the 5-point, tear-away vests certified for use by Union Pacific.

Jewelry that may affect one's safe performance of their duties must not be worn.

Hair, including beards, must be worn in a manner to permit safe performance of duties.

[^Top](#)

71.7: Footwear

When working on uneven terrain, on or near tracks, on cars, engines or other equipment wear footwear that affords support and protection. Footwear must have soles that provide good traction and thick enough to withstand punctures.

Footwear with laces or buckles must be tied or buckled. Do not wear excessively worn footwear or footwear with loose soles or heels.


Unless you work exclusively in an office, you must not wear thin-soled or high-heeled shoes, sandals, athletic (sports) shoes or similar footwear.

[^Top](#)

71.7.1: Defined Heel

All employees, except office workers are required to wear footwear with a defined heel. A

“defined heel” means that the back of the heel is at an approximate right angle from the sole of the shoe and from the ground when standing. The front of the heel must not be at an angle of less than 45 degrees from the sole of the shoe to the ground. Footwear with heels commonly called “riding heels” are not appropriate footwear and do not satisfy this requirement. However, approved snow packs are acceptable.

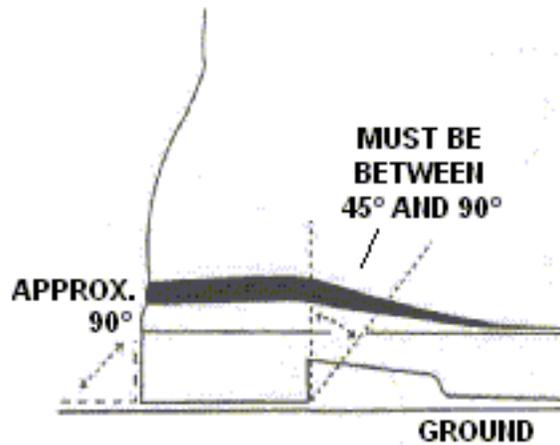

[^Top](#)

71.7.2: Covers the Ankle

Footwear that covers the ankle will be a boot (either slip on or lace up) of approximately 6 inches or more in height. Employees who routinely work in the field must wear footwear that covers their ankles. Lace-up boots are required for Transportation Department employees. Intermodal employees that load and unload trailers/containers are required to wear 6 inch lace-up safety toed footwear that meets OSHA requirements.

[^Top](#)

71.7.3: OSHA Required Footwear

When working in areas where there is a danger of foot injuries due to falling or rolling objects, or objects piercing the sole of the foot or electrical hazard, protective footwear as defined by the OSHA Standard 1910.136 is required. All safety toe footwear must meet ANSI Z41.1, Standard Class #75. OSHA required footwear is required for the following departments:

- Engineering
- Locomotive
- Car
- Supply
- Telecommunications

- Intermodal

[^Top](#)

71.7.4: FRA Required Footwear

Bridge workers are required to wear safety footwear that conforms to FRA footwear requirements.

[^Top](#)

71.7.5: Visitors and Contractors

Visitors and contractors must wear the same type of footwear as those with whom they are working. The individual responsible for the visitor shall ensure compliance.

Note: See ***Safety Resource Manual, Personal Protective Equipment Approval Policy (5.0, Foot Protection), Section IV-A and Safety Resource Manual, Safety Shoe Policy and Guidelines, Section IV-C.***

[^Top](#)

71.8: Respirators

When conditions require use of respiratory protection, refer to the Safety Resource Manual, Section IV-E, Respiratory Protection Program. Before a UP employee is fit-tested with or issued a respirator, medical evaluation and respirator training is required. ~~Medical re-evaluation is required every six years.~~ The employees' medical condition will be reviewed (questionnaire-based) annually. Respirator training is required annually. Tight-fitting half or full face air purifying respirators require annual quantitative respirator fit-testing. Loose-fitting helmet or hood type respirators do not require fit testing, but all other requirements apply. Employees using tight-fitting half or full face air purifying respirators must not have facial hair that protrudes under the respirator seal or interferes with respirator valve functions. Employees using loose-fitting respirators must not have facial hair that interferes with respirator valve functions.

Note: See ***Safety Resource Manual, Section IV-A, Personal Protective Equipment Approval Policy Paragraph 3.0 Respiratory Protection; Section IV-E, Respiratory Protection Program; and Section IV-AC, "Lead In Construction Program.***

System Special Instruction

71.8 Respirators

Change third sentence to require annual medical review as follows.

The employees' medical condition will be reviewed (questionnaire-based) annually.

[^Top](#)

Updated: 1/28/2011

72.0: FIRE PREVENTION

Note: See *Safety Resource Manual, Fire Protection Policy and Guidelines, Section IV-AH*.

- [72.0: FIRE PREVENTION](#)
- [72.1: Sounding Alarm](#)
- [72.2: Operating Fire Equipment](#)
- [72.3: Fire Protection](#)
- [72.4: Fire Doors and Stops](#)
- [72.5: Fire Exits and Passageways](#)
- [72.6: Questionable Fire Hazards](#)
- [72.7: Fire Protection Devices](#)
- [72.7.1: Fixed Facilities](#)
- [72.7.2: Mobile Equipment](#)
- [72.8: Fire Classifications](#)
- [72.9: Right-of-Way Fire](#)
- [72.10: Starting Fires](#)
- [72.11: Open Burning Prohibited](#)
- [72.12: Ignition Sources](#)
- [72.13: Use and Handling of Liquefied Petroleum Gas \(LPG\)](#)
- [72.14: Flammable and Combustible Liquids Storage](#)
- [72.14.1: LPG Tanks](#)
- [72.15: Handling Flammable Liquids](#)
- [72.16: Cleaning and Polishing](#)
- [72.17: Fueling Track Cars, Roadway Machines, and Automotive Units](#)
- [72.17.1: Fueling Portable Power Equipment](#)
- [72.17.2: Fueling LPG tanks](#)
- [72.18: Building or Outfit Cars](#)
- [72.19: Open Flame Starting](#)
- [72.20: Exhaust System](#)
- [72.21: Water Flash Back Protection](#)

72.0: FIRE PREVENTION

Note: See *Safety Resource Manual, Fire Protection Policy and Guidelines, Section IV-AH*.

[^Top](#)

72.1: Sounding Alarm

Sound the fire alarm and summon help, when available; attempt to control and extinguish a fire only if it can be done without personal injury.

[^Top](#)

72.2: Operating Fire Equipment

Know how to operate the fire protection equipment at the work location.

[^Top](#)

72.3: Fire Protection

Fire prevention is accomplished by maintaining good housekeeping procedures. Eliminate all rubbish, trash, oily rags and towels. Do not allow the accumulation of combustible materials and debris.

[^Top](#)

72.4: Fire Doors and Stops

Ensure that doors, shutters, and windows used as fire stops are in good condition and that no obstructions interfere with or prevent required operation.

[^Top](#)

72.5: Fire Exits and Passageways

Keep all fire escapes, ladders, stairways, doorways, passageways, roadways and approaches free from obstruction and in good repair to ensure safe exit from buildings and easy access to fire-fighting equipment.

[^Top](#)

72.6: Questionable Fire Hazards

Immediately correct and/or inform the supervisor if you question the safe condition of gas connections, motors, wiring, gasoline or oil burning devices and vehicles or tools and equipment.

[^Top](#)

72.7: Fire Protection Devices

Fire protection devices must be provided, inspected and maintained as required by local, state and federal fire codes and regulations. Tampering with such devices is strictly prohibited.

[^Top](#)

72.7.1: Fixed Facilities

Extinguishers must be visually inspected monthly and subjected to an annual maintenance check by a qualified person. A qualified person will make a monthly inspection to determine that:

- there is no evidence of physical damage,
- the seal is not broken,
- the extinguisher is fully charged,
- the extinguisher is properly tagged with inspection date noted on tag.

Fire extinguishers in buildings must be properly marked to indicate location.

Access to fire extinguishers, alarm boxes and other fire protection devices must be kept clear.

Vehicles must not be parked or material placed or stored that block fire hydrants.

[^Top](#)

72.7.2: Mobile Equipment

Company vehicles (except automobiles), mobile shop equipment, and ride-on-track equipment must carry a properly maintained and inspected fire extinguisher of the correct class to aid in fire suppression.

[^Top](#)

72.8: Fire Classifications

The four fire classifications and the type of extinguishing medium necessary to extinguish them include:

Class A. Fires in ordinary combustible materials (e.g., wood, fabrics, paper, plastics, etc.). Extinguish with water, multipurpose dry chemical, or any fire extinguisher rated for Class A fires.

Class B. Fires in flammable and combustible liquids (e.g., gasoline, oil and grease, and gases). Extinguish with ordinary or multipurpose dry chemical, Halon 1211, or carbon dioxide, all rated for Class B fires. Sand or dirt may also be used.

Class C. Fires in energized electrical equipment. Use only nonconducting extinguishing agents rated as safe for Class C fires (e.g., ordinary or multipurpose dry chemical, Halon 1211, or carbon dioxide). If electrical equipment is involved in a fire, de-energize it as quickly as possible.

Class D. Fires in combustible metal. Use only nonconducting extinguisher agents rated as safe for Class D fires (e.g. foundry flux, lith-x powder, TMB liquid, pyromet powder, TEC powder, dry talc, dry graphite, powder, dry sand, etc.). If electrical equipment is involved in a fire de-energize it as quickly as possible.

Do not use water to extinguish Class B, C, and D fires.

Employees not experienced in handling energized electrical circuits must not attempt to extinguish fires on power line poles or directly connected equipment.

[^Top](#)

72.9: Right-of-Way Fire

Crew members must promptly report to the train dispatcher fires on or near the right-of-way unless the fire is being controlled. If the fire may spread to a bridge or other structure, train must stop and crew members help extinguish the fire.

If employees know that a train has started a fire, they must promptly notify the train dispatcher and, if possible, the engineer. All other known fire causes should be reported to the train dispatcher.

[^Top](#)

72.10: Starting Fires

Flammable liquid must not be used to start or intensify a fire.

[^Top](#)

72.11: Open Burning Prohibited

Burning of any kind (i.e., ties, trash, for warming, etc.) is **not** allowed without written approval from the superintendent level or above. Approval will not be granted until the employee obtains the necessary environmental and fire permits from state and local authorities. Compliance with all fire permit provisions is essential. A fire permit alone will not be sufficient. A fire must be attended until it is completely out.

[^Top](#)

72.12: Ignition Sources

Do not smoke or use open fire:

within 50 feet of areas where flammable or combustible liquids are being handled or stored,

near oil storage tanks,

in areas where LPG powered units are being serviced or stored,

when working on or near storage batteries,

in any designated non-smoking area.

When welding, heating or cutting on or near equipment with fuel tanks conduct a job briefing and ensure that appropriate fire prevention measures have been implemented.

Note: See **Rule 79.3, Fire Protection.**

[^Top](#)

72.13: Use and Handling of Liquefied Petroleum Gas (LPG)

Units powered by LPG must not be subjected to extreme heat in areas near ovens, furnaces or other sources of high temperature.

At the end of a day's operation, valves on tanks of LPG-powered equipment must be turned off to prevent leakage and potential explosion.

[^Top](#)

72.14: Flammable and Combustible Liquids Storage

Flammable liquids (including paints) and combustibles, must be stored in approved cabinets or designated areas and in approved and properly labeled containers. Store all spray cans in a cool place away from direct sunlight, radiators, stoves and other sources of heat. Do not puncture, incinerate or store above 120 degrees Fahrenheit.

[^Top](#)

72.14.1: LPG Tanks

Tanks containing LPG must be stored in an outdoor, ventilated, sheltered area, properly secured and clearly marked "No Smoking-Keep Lights and Fires Away."

[^Top](#)

72.15: Handling Flammable Liquids

Use approved containers and non-sparking tools when handling gasoline and other flammable liquids.

Label all drums, totes, tanks and containers as to contents.

Note: See **Rule 70.25, Drums and Containers.**

[^Top](#)

72.16: Cleaning and Polishing

Do not use gasoline for cleaning or polishing purposes. When using other flammable or combustible liquids for cleaning and polishing use:

- approved liquids and compounds in well-ventilated areas,
- approved storage methods for cloths, waste or other materials used in cleaning operations,
- approved cleaning tanks with self-closing lids when using solvents.

[^Top](#)

72.17: Fueling Track Cars, Roadway Machines, and Automotive Units

When fueling mobile equipment, other than locomotives, employees must:

1. Move equipment out of enclosed area before fueling the vehicle. (This does not apply to equipment in the shop for repair.)
2. Stop the vehicle's engine before refueling.
3. Make sure the hose nozzle on the refueling can is always touching the side of the fill opening of a tank to prevent a hazardous static electric charge. If employees use a gasoline can, it must be equipped with a standard pouring spout.
4. Avoid spilling fuel. If fuel does spill, it must be cleaned up or allowed to dissipate before starting the engine.
5. If artificial light is necessary to fill the fuel tank, use an electric lantern or flashlight.
6. Smoking or open fires near fueling operations is prohibited.

Note: See ***Environmental Laws, Policies and Procedures Manual, Spill Prevention Control and Countermeasures (SPCC)***

[^Top](#)

72.17.1: Fueling Portable Power Equipment

When fueling is necessary during use, the engine must be stopped and sufficient time allowed to cool. Tool must be removed from the immediate work area and placed where fuels cannot spill on any hot surfaces or ignition sources. Move fuel containers at least 20 feet from the

work area before starting engine.

[^Top](#)

72.17.2: Fueling LPG tanks

Fueling of LPG tanks must be done outdoors at a location at least 15 feet from storage tanks at the end opposite from the relief valve. Portable tanks must be changed out-of- doors, where possible, and at least 50 feet from an open flame, except on outfit cars with kitchen facilities. When placing LPG tanks on motor vehicles, the engine must be stopped.

[^Top](#)

72.18: Building or Outfit Cars

Obtain authorization before installing any non-company-furnished heating or lighting devices or appliances in company buildings or outfit cars. Do not use gasoline or alcohol stoves or lamps in company buildings or outfit cars.

[^Top](#)

72.19: Open Flame Starting

Do not use an open flame to warm cylinders, manifolds, carburetors, or other internal combustion engine parts before starting the engine.

[^Top](#)

72.20: Exhaust System

Maintain the exhaust system of internal combustion engines in a safe condition. Ensure that catalytic converters, exhaust systems and exhaust gases do not come in contact with dry grass, weeds, or flammable material.

[^Top](#)

72.21: Water Flash Back Protection

Water flash back protection device must be filled to the required level with water each week.

Flash back water seals on hydraulic back pressure valves located on permanent lines through shops must be inspected at least once each week and water kept at proper level. Water seals of hydraulic back pressure valves must be tagged to show date inspected. Inspect back flow-check valve outlets at all stations on a weekly basis to determine that they will properly function.

[^Top](#)

Updated: 4/28/2010

73.0: EXPLOSIVES

- [73.1: Authorized Personnel](#)
- [73.2: Transporting](#)
- [73.3: Caution Open Flames](#)
- [73.4: No Smoking](#)
- [73.5: No Dropping](#)
- [73.6: Not Carried in Pocket](#)

73.1: Authorized Personnel

Only qualified and properly licensed personnel are permitted to use explosives. These persons must comply with the rules and regulations of the Bureau of Alcohol, Tobacco and Firearms (BATF) and the safety standards of the National Fire Protection Agency (NFPA). They must also observe all federal or state laws or city ordinances that cover handling, storing, and using explosives.

[^Top](#)

73.2: Transporting

When transporting explosives in railroad cars, trucks, automobiles, or other vehicles, use proper care and follow Department of Transportation (DOT) and BATF instructions.

Except in an emergency, do not transport explosives on track cars.

[^Top](#)

73.3: Caution Open Flames

Do not handle explosives near open flame, lights or fires. Use an electric flashlight or electric lantern if artificial light is necessary.

[^Top](#)

73.4: No Smoking

Do not smoke around explosives (smoking is prohibited on company property). The person lighting the fuse is the only one allowed to carry matches, lighters or other flame-producing devices.

[^Top](#)

73.5: No Dropping

Do not drop packages or cases of explosives or handle them roughly.

[^Top](#)

73.6: Not Carried in Pocket

Do not carry caps, electric primers, or other explosives in your pockets.

[^Top](#)

Updated: 4/28/2010

74.0: AUTOMOTIVE EQUIPMENT

Vehicles

- [74.1: Vehicle Maintenance](#)
- [74.2: Driver Requirements](#)
- [74.2.1: DOT-Qualified Drivers](#)
- [74.3: Driver Responsibility](#)
- [74.4: Impaired Driver](#)
- [74.5: Tools and Material](#)
- [74.6: Clearing Obstructions](#)
- [74.7: Passengers](#)
- [74.8: Seat Belts](#)
- [74.9: Seating, Transporting](#)
- [74.10: Headlights On](#)
- [74.11: Back-Up Moves](#)
- [74.12: Railroad Grade Crossing](#)
- [74.13: Hazardous Materials](#)
- [74.14: Parked Vehicle](#)
- [74.15: Trailers](#)
- [74.16: Working under Vehicles/Trailers](#)
- [74.17: Train Yard or Utility Type Vehicles](#)

Batteries

- [74.18: Battery Inspection](#)
- [74.19: Charging Batteries](#)
- [74.20: Jump Starting](#)

Vehicles

74.1: Vehicle Maintenance

Driver or supervisor assigned to a vehicle is responsible for lubrication and proper

maintenance per vehicle maintenance or leasing company specifications. Drivers must record vehicle maintenance information and retain the maintenance record inside the vehicle.

Driver must know that the vehicle is in good working order and free of any defects. They must notify their supervisor if the vehicle becomes defective. Required repairs must be completed before the vehicle is returned to service.

[^Top](#)

74.2: Driver Requirements

Only authorized employees may operate company vehicles. All employees who drive company vehicles must:

- possess a current, valid driver's license or commercial driver's license (CDL),
- notify their supervisor and discontinue operating vehicles at any time their license or permit has expired, been suspended, revoked or restricted.

[^Top](#)

74.2.1: DOT-Qualified Drivers

Drivers of company vehicles that meet one or more of the following criteria will be required to ~~become UPRR pass a knowledge and skills (driving) test to become~~ Department of Transportation (DOT) qualified:

- Operate a vehicle with gross vehicle weight rating (GVWR) of 10,001 lbs or more (single truck or a combination of truck and trailer), ~~combination weight of 26,001 pounds or more,~~
- Operate a vehicle designed to carry 16 or more persons, including the driver,
- Operate a vehicle placarded under the hazardous materials regulations because of its hazardous cargo.

Drivers must have in their possession at all times when driving a commercial motor vehicle:

- Valid Commercial Drivers License (CDL), for vehicles with a gross vehicle weight rating (GVWR) greater than 26,000 lbs.
- Valid Commercial Driver License (CDL) with a hazardous material endorsement for any vehicle placarded under the hazardous materials regulations because of hazardous cargo.

- Valid Drivers License (CDL), for vehicles with a gross vehicle weight rating (GVWR) less than 26,000 lbs.
- Valid copy of medical examiners certificate card when driving a commercial motor vehicle with a gross vehicle weight rating (GVWR) greater than 10,000 lbs.
- Current day and previous seven days hours of service (HOS) logs when driving a commercial motor vehicle with a gross vehicle weight rating (GVWR) greater than 10,000 lbs.

Drivers of vehicles with gross vehicle weight rating (GVW) of more greater than 10,000 pounds must be qualified by UPRR DOT and familiar with Federal Motor Carriers Safety Regulations. Federal Motor Carriers Safety Regulations requires UPRR to have on file, a completed driver's qualification file that includes: ~~which require that drivers have the following photocopies at company headquarters:~~

- Driver's DOT application for employment.
- Copy of motor vehicle record (MVR) by each state for the past three years.
- Current medical examiner's certificate card,
- Certificate of road test certificate for DOT certified drivers who do not possess a CDL license,
- Annual review of driving record (MVR),
- ~~Drivers Operator's license,~~
- ~~Waiver of Physical Disqualification, if applicable,~~
- ~~Driver's Application for Employment, if the application included a prior driving record (if not, a new application must be completed and included in the operator's DOT file),~~
- ~~Annual Review of Driving Record (required every 12 months).~~

General Order

Change rule to read:

Drivers of company vehicles that meet one or more of the following criteria will be required to become UPRR Department of Transportation (DOT) qualified:

- Operate a vehicle with gross vehicle weight rating (GVWR) of 10,001 lbs or more (single truck or a combination of truck and trailer), operate a vehicle designed to carry 16 or more persons, including the driver,
- Operate a vehicle placarded under the hazardous materials regulations because of its hazardous cargo.

Drivers must have in their possession at all times when driving a commercial motor vehicle:

- Valid Commercial Drivers License (CDL), for vehicles with a gross vehicle weight rating

(GVWR) greater than 26,000 lbs.

- Valid Commercial Driver License (CDL) with a hazardous material endorsement for any vehicle placarded under the hazardous materials regulations because of hazardous cargo.
- Valid Drivers License (CDL), for vehicles with a gross vehicle weight rating (GVWR) less than 26,000 lbs.
- Valid copy of medical certificate card when driving a commercial motor vehicle with a gross vehicle weight rating (GVWR) greater than 10,000 lbs.
- Current day and previous seven days hours of service (HOS) logs when driving a commercial motor vehicle with a gross vehicle weight rating (GVWR) greater than 10,000 lbs.

Drivers of vehicles with gross vehicle weight rating (GVW) greater than 10,000 pounds must be qualified by UPRR DOT and familiar with Federal Motor Carriers Safety Regulations. Federal Motor Carriers Safety Regulations requires UPRR to have on file, a completed driver's qualification file that includes: Driver's DOT application for employment.

- Copy of motor vehicle record (MVR) by each state for the past three years.
- Current medical examiner's certificate card,
- Certificate of road test for DOT certified drivers who do not possess a CDL,
- Annual review of driving record (MVR),
- Annual Review of Driving Record.

[^Top](#)

74.3: Driver Responsibility

- Know and observe all local, state, and federal laws and regulations governing vehicle operation.
- Use courtesy, consideration, and common sense to prevent accidents and control situations encountered that cannot be provided for in the law.
- Obey posted speed limits. Regardless of posted speed limits, drivers must not exceed a safe and prudent speed for their vehicle when weather, traffic, road conditions, vehicle load or any other prevailing conditions necessitates operating at a lower speed.
- Ensure that required emergency equipment and tools are on the vehicle.
- Use of cell phones is prohibited while operating a motor vehicle unless hands free device is used. This includes dialing, unless voice activated dialing or speed dialing is available, texting or reading text messages. Cell phones may be used when stopped on other than a roadway.

System Special Instruction

74.3 Driver Responsibility

Add new bullet reading:

- Use of cell phones is prohibited while operating a motor vehicle unless hands free device is used. This includes dialing, unless voice activated dialing or speed dialing is available, texting or reading text messages. Cell phones may be used when stopped on other than a roadway.

[^Top](#)

74.4: Impaired Driver

Do not drive when suffering fatigue, illness, lack of sleep or any other physical condition which may affect alertness and ability to operate the vehicle safely.

[^Top](#)

74.5: Tools and Material

Good housekeeping must be maintained in the vehicle at all times. Loose items must not be kept on the dash or on rear window shelf. Tools, equipment, material and freight must be properly secured. Gross Vehicle Weight (GVW) of vehicle must not be exceeded. Do not exceed load limit of trailers.

[^Top](#)

74.6: Clearing Obstructions

The driver must know the vehicle and load will clear all obstructions or close clearances. Do not park the vehicle foul of any railroad track. Do not park vehicle foul of the traveled portion of a roadway unless proper warning to approaching traffic is provided.

[^Top](#)

74.7: Passengers

Only employees or authorized passengers are permitted to ride in company vehicles.

[^Top](#)

74.8: Seat Belts

All vehicle occupants must use seat belts, where provided. This includes Company vehicles, privately-owned vehicles used on Company business, leased, rented or contract vehicles, and hi-rail vehicles on and off the rail. Driver must not move a vehicle until assured all passengers are seated and have their seat belts fastened in proper restraining position.

Seat belts will be inspected prior to use. Seat belts will not be removed from vehicles to avoid use. Missing or defective seat belts will be replaced immediately or the vehicle will be removed from service.

Seat belt use is required while operating material handling or utility type vehicles, if so equipped, i.e., forklifts, mobile cranes, mules, utility trucks, etc.

Exception: Seat belt use is not required if vehicle is not exceeding 5 mph and vehicle is used during the task of inspecting cars, coupling air hoses or changing brake shoes.

[^Top](#)

74.9: Seating, Transporting

Passengers must be seated on approved seats. Do not project body parts beyond the sides or rear of the vehicle. Passengers must not be transported in truck beds.

Getting on or off moving vehicles is prohibited.

[^Top](#)

74.10: Headlights On

Vehicle headlights will be illuminated while vehicles are in operation.

[^Top](#)

74.11: Back-Up Moves

On Union Pacific property work must be planned to minimize back-up moves and to avoid driving into areas requiring back-up moves. No back-up move is allowed when a forward move can safely be made.

Employee(s) in the cab of a vehicle, must not speak to or distract the driver until the back-up move is completed, except in case of emergency.

Before initiating a back-up move driver must:

- Walk around the vehicle and confirm that it is safe to move.
- Look in the direction of movement.
- Sound horn prior to back up move if back up alarm is inoperative or unavailable.
- Not exceed 5 MPH, conditions may require a lower speed.

When rearward vision is impaired, when equipment is standing on one or more tracks adjacent to the road, or in a Union Pacific parking lot, the following applies:

- When a second person is available:
 - A job briefing must be performed prior to movement, addressing the direction of move and position of person protecting the move.
 - The second individual, when safe to do so, must be near the rear of the vehicle to direct the movement.
 - Driver must immediately stop if the person who is directing the movement disappears from the driver's view.
- When a second person is not available:
 - The driver must stop every 150 feet, secure the vehicle and visually confirm that nothing has entered the path of the rearward movement of vehicle.
 - This will be repeated consecutively every 150 feet or until back-up move is no longer required.

~~Work must be planned to minimize backing movements.~~

~~Before driving a vehicle, drivers must walk around the vehicle (except for automobiles) and make sure it is safe to move. When backing up, drivers must look in the direction of movement.~~

~~When a driver is backing up and rear-ward vision is impaired, a second individual, when available, must be near the rear of the vehicle and guide the vehicle to protect the movement. If the person who is protecting the movement disappears from the driver's view, the driver must immediately stop the movement.~~

System Special Instruction

Change rule as follows:

On Union Pacific property work must be planned to minimize back-up moves and to avoid driving into areas requiring back-up moves. No back-up move is allowed when a forward move can safely be made.

Employee(s) in the cab of a vehicle, must not speak to or distract the driver until the back-up move is completed, except in case of emergency.

Before initiating a back-up move driver must:

- Walk around the vehicle and confirm that it is safe to move.
- Look in the direction of movement.
- Sound horn prior to back up move if back up alarm is inoperative or unavailable.
- Not exceed 5 MPH, conditions may require a lower speed.

When rearward vision is impaired, when equipment is standing on one or more tracks adjacent to the road, or in a Union Pacific parking lot, the following applies:

- When a second person is available:
 - A job briefing must be performed prior to movement, addressing the direction of move and position of person protecting the move.
 - The second individual, when safe to do so, must be near the rear of the vehicle to direct the movement.
 - Driver must immediately stop if the person who is directing the movement disappears from the driver's view.
- When a second person is not available:
 - The driver must stop every 150 feet, secure the vehicle and visually confirm that nothing has entered the path of the rearward movement of vehicle.
 - This will be repeated consecutively every 150 feet or until back-up move is no longer required.

[^Top](#)

74.12: Railroad Grade Crossing

Drivers must approach railroad crossings prepared to stop. Vehicles designed to transport 16 or more passengers including the driver or placarded vehicles must stop at all highway railroad crossings at grade.

When crossing tracks in train yards and visibility is blocked by railroad cars or locomotives, the driver of the vehicle must:

- use alternate crossing or,
- stop the vehicle and verify (by either a flagman or personal observation) that there will be no movement on the tracks being crossed.

Drivers of vehicles transporting train, engine and yard (TE&Y) employees, must stop and look both ways, before proceeding over any crossing in a train yard.

[^Top](#)

74.13: Hazardous Materials

Do not place gasoline or other hazardous materials, including oxygen and fuel gas, in a bus or truck compartment occupied by the driver or other persons. This requirement does not apply to transporting railroad flagging kits. Do not transport gasoline or other flammables in an automobile trunk except in an emergency and then only in an approved container secured against movement.

When vehicles are required to transport flagging kits, a copy of the DOT Exemption 7991 must be in the vehicle.

When transporting hazardous material, the responsible employee must obtain and fill out Form 70056, "Shipping Papers for Hazardous Materials". If form is not available it can be obtained in "TCS" under: SW USE FORM70056 STUDENT. Material Safety Data Sheet (MSDS) Book must be carried in the vehicle.

[^Top](#)

74.14: Parked Vehicle

If necessary to leave the vehicle motor running, the parking brake must be firmly set and the transmission is placed in neutral (manual transmissions) or park (automatic transmissions) to prevent movement.

When vehicles are parked and left unattended, standard transmissions must be placed in low gear, automatic transmissions in park, emergency brake set and the motor stopped.

Ignition key must be removed, windows closed and doors locked. In addition, when vehicles or trailers are parked on a grade, precautions must be taken to ensure they cannot roll unexpectedly.

[^Top](#)

74.15: Trailers

Before towing trailers drivers must inspect:

- tires,
- hitches and safety chains,
- lights,
- equipment or material loaded on the trailer.

Any unusual condition noted must be corrected before towing is undertaken. If a trailer is equipped with brakes, the braking system must be operable. Safety chains, where required, must be used. Trailers must be equipped with required and operable stop, tail, directional and clearance lights. Electrical connectors on trailers and vehicles must be compatible and must be connected before towing.

[^Top](#)

74.16: Working under Vehicles/Trailers

Sitting or lying underneath vehicles or trailers is prohibited except when making inspection or repairs and then only when the brakes are set, wheels blocked and the engine stopped and keys removed. Do not position yourself under any raised vehicle or trailer, unless proper support stands are in place.

[^Top](#)

74.17: Train Yard or Utility Type Vehicles

Only authorized drivers are permitted to operate train yard vehicles. Compliance with other vehicle rules, i.e., speed, inspection, etc. also apply to operating this type of vehicle. When rules for operation and care are furnished by the manufacturer they must be observed. Reckless or careless driving is prohibited. Operators of vehicles must:

- maintain control at all times,
- be prepared to stop within one half their range of vision short of any person or object,
- avoid striking standing or moving equipment or being struck by moving equipment,
- maintain sufficient clearance to tracks and equipment on those tracks. (If tracks must be fouled or proper clearance cannot be maintained, movement must be protected.),

- operate only in designated areas and over designated crossings, pathways and road ways.

Riders shall not be permitted on vehicles unless provided with a seat. Riding side saddle on yard vehicles is prohibited. Vehicles designed for one person must not be occupied by more than one person. Where provided seat belts will be worn.

Do not make adjustments or disable any speed limiting device.

[^Top](#)

Batteries

74.18: Battery Inspection

Inspect batteries as required.

[^Top](#)

74.19: Charging Batteries

When charging batteries, keep the vent caps in place to avoid electrolyte spray. Maintain vent caps in functioning condition. If necessary to bring the liquid to the correct level, use approved water. Charger must be turned off or unplugged before connecting to or disconnecting from battery. Hook the charger to the positive post first and the negative post last. When removing the charger, disconnect the negative post first and the positive post last.

Smoking is prohibited in battery charging areas. Precautions must be taken to prevent open flames, sparks, or electric arcs in battery charging areas or around exposed batteries. The area must be adequately ventilated.

Emergency eye wash stations/showers must be located at or near permanent battery charging installations and must be inspected weekly. Plumbed systems must be flushed in conjunction with the inspection. Access must be kept clear.

Tools and other metallic objects must be kept away from the top of uncovered batteries.


During cold weather, keep storage batteries maintained in a fully charged condition.

[^Top](#)

74.20: Jump Starting

When necessary to jump a vehicle battery, the following procedure must be followed:

1. Turn off all electrical accessories in both vehicles, including Company radio. Start the engine of the booster vehicle to keep its battery from being discharged.
2. Make sure the vehicles are not touching. If possible, boost on-track machines from a non-rail source (off-track vehicle/machine, booster pack or spare battery). If this is not possible, jump start the on-track machine from another on-track machine or vehicle using two sets of jumper cables to keep sparks away from either battery. After connecting one set of jumper cables to each battery, connect the negative ends of the jumper cables together first, followed by the positive ends. After starting machine, disconnect the positive ends first, followed by the negative ends.
3. Shift both vehicles into neutral or park and set the emergency brakes.
4. Check to be sure that both batteries are the same voltage.
5. Check to see that the fluid level is correct. If the fluid is frozen, do not attempt to start the vehicle.
6. Clamp one jumper cable to the positive (+) terminal of the dead battery (position 1 on diagram). Do not allow positive cable clamps to touch any metal other than battery terminal. Connect other end of positive (+) cable to positive (+) terminal of good battery (position 2 on diagram).
7. Connect one end of the second cable [negative (-)] to other [negative (-)] of good battery (position 3 on diagram). Make final connection on engine block of stalled engine (not to negative post) away from battery, carburetor, fuel line, any tubing or moving parts (position 4 on diagram).

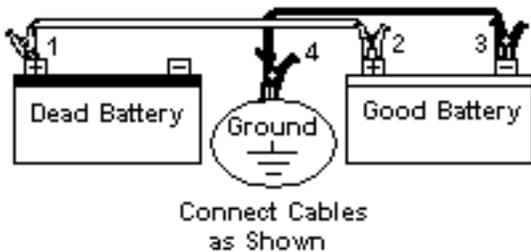

8. Stand back from both vehicles. Start vehicle with good battery—then start the disabled vehicle.
9. Remove cables in reverse order of connections beginning by first removing cable from engine block or metallic ground.

Updated: 4/29/2011

75.0: MATERIAL HANDLING

- [75.1: Material Storage](#)
- [75.2: Pallets](#)
- [75.3: Moving Materials](#)
- [75.4: Other Protruding Objects](#)
- [75.5: Transfer Plates and Loading Ramps](#)
- [75.6: Loading and Unloading Materials](#)
- [75.7: Loading and Unloading Truck Trailers](#)
- [75.8: Load Binders](#)
- [75.9: Drums and Barrels](#)
- [75.10: Wheel Sets](#)
- [75.11: Forklifts](#)
- [75.11.1: Training](#)
- [75.11.2: Inspection](#)
- [75.11.3: Operation](#)
- [75.11.4: Unattended](#)
- [75.11.5: Wagon Tongue Equipment](#)

75.1: Material Storage

When stacking or storing materials and freight:

- it must be placed safely, securely and where it will not create hazardous conditions,
- do not store heavy materials on top of fragile or crushable materials,
- store heavier, bulkier materials at a height between the shoulders and mid-thigh to minimize lifting effort from bending or reaching too high,
- place in locations where people will not step on, trip over or fall on them,
- keep out of walkways and passageways, doorways, fire lanes and truck spaces,
- keep a safe distance from the edge of pits, ledges and platforms,
- place it where it will not block access to fire extinguishers, electrical panels, emergency eye washes, showers or exits,
- material stored higher than 6 feet from the ground must be palletized and should be retrieved with a forklift whenever possible,
- do not overload storage racks or areas.

[^Top](#)

75.2: Pallets

Only pallets in good condition are to be used. If material is to be banded to the pallet, care must be exercised to apply sufficient tension to secure the load, but not to the point of breaking the bands or damaging the pallets. In stacking loaded pallets, consideration must be given to the supporting ability of the material and packaging. Stack only to the height that can be safely supported by the material on the bottom of the stack. Pallets must not be stood or stored on end. The forklift operator must caution others working in the vicinity of the stacking operations.

[^Top](#)

75.3: Moving Materials

Keep material being moved under control and be prepared to stop short of obstructions or persons. Keep feet and hands clear of rollers or dollies under the load.

[^Top](#)

75.4: Other Protruding Objects

Before handling materials or supplies, remove or flatten sharp edges, protruding nails, screws, staples or loose ends of metal bands or wire.

[^Top](#)

75.5: Transfer Plates and Loading Ramps

When working with transfer plates, loading ramps, gang planks or skids:

- ensure that they are strong enough for the load,
- properly place and secure devices before using,
- when placing them between a car and platform, lower them by hand or slide them into position unless using a lift truck,
- when lifting or placing transfer plates, prevent the plate from slipping or falling and keep hands and feet clear of the plates,
- when removing gang planks, transfer plates or skids remove nails, cleats or other

fastening devices and dispose of properly.

[^Top](#)

75.6: Loading and Unloading Materials

Inspect decks or floors of trucks, trailers or railcars. If unsafe, do not move material by occupying deck or using a fork truck until condition is corrected or other means employed to handle material.

Ensure that no one is on the ground where material is being unloaded. Do not work on the ground near others who are unloading material.

[^Top](#)

75.7: Loading and Unloading Truck Trailers

Do not load or unload a truck trailer while the tractor is being coupled or uncoupled or when a tractor is coupled and the engine is running, unless necessary to operate attached boom/hoisting equipment.

The brakes of highway trucks must be set and wheel chocks placed under the rear wheels to prevent trucks from rolling while they are boarded with powered industrial trucks.

- If present, trailer to dock locking devices must be used and checked to see that the lock is securely attached to the trailer before proceeding to unload.
- If trailer to dock locking devices are not present, the rear wheels of the trailer must be chocked on both sides of the trailer by placing approved wheel chocks securely against the tires. Only those wheel chocks designed and manufactured for this specific purpose should be used, and then only those with gripping surface. Make-shift chocks must not be used.
- Trailers that have been spotted and the tractor has been disconnected must have an approved trailer stabilizing jack placed underneath the nose and directly in the center of the trailer. If the load appears to be exceptionally heavy, has shifted to one side, or in the event there could be a possible defect with the landing gear, it will be necessary to place a jack under both front corners of the trailer.
- Trailers with tractor attached require the locking device or the rear wheels chocked and ensure the brakes are set.
- Visually inspect the floor of trailers prior to entry with fork truck. Any defects detected must be reported to immediate supervisor. Do not exceed the capacity of the floor.

[^Top](#)

75.8: Load Binders

The use of lever action load binders, i.e., break over binders, cam-lock binders, chain boomer, etc., are prohibited. Do not assist others in the operation of lever action load binders. Ratchet action load binders are the preferred alternative. All binders must be inspected and in good condition for use.

[^Top](#)

75.9: Drums and Barrels

When handling drums or barrels:

- test the weight of a drum before attempting to handle it,
- use approved drum handling equipment,
- assure sufficient clearance before pulling drum over on side,
- do not use feet to roll drums,
- do not attempt to up-end a filled drum without assistance or mechanical equipment.

[^Top](#)

75.10: Wheel Sets

Stopping movement of mounted wheels by holding the flange is prohibited. Flanges can be very sharp. Wear cut resistant or leather gloves when handling wheels. Walking in front of rolling mounted wheels is prohibited.

[^Top](#)

75.11: Forklifts

[^Top](#)

75.11.1: Training

Only employees that have been trained may operate a fork-lift.

[^Top](#)

75.11.2: Inspection

Inspect forklift prior to operation. Any unusual condition must be corrected or the forklift must be removed from service.

[^Top](#)

75.11.3: Operation

Forklift operators must comply with the following:

- operate at a speed that will permit stopping short of objects or persons,
- cross tracks diagonally, when possible,
- forklift with a load must be backed down ramps or inclines,
- highway vehicles and rail cars must have wheels blocked and brakes set before loading or unloading,
- travel with load as low as practical, against mast. Load must not be lifted while traveling. For clear vision, travel backwards with bulky loads,
- watch for impaired overhead clearance and rear end swing, avoiding sudden stops, jerks, turns and rough terrain,
- keep forklift clear of edge of loading docks, platforms and gangboards,
- do not use forklifts as a platform to raise or lower employees, except where an approved cage, secured to the forks and /or lifting carriage is provided,
- only the operator is allowed to ride a forklift, except where a second seat or an approved cage is provided,
- getting on or off a moving forklift is prohibited. When stopping to open or close gates or doors, adjust loads, etc., the forklift must be stopped in the clear with the hand brake set and the forks lowered to the floor or ground.

[^Top](#)

75.11.4: Unattended

A forklift is unattended when the operator is more than 25 feet from the machine or the operator is not in view of the machine. If the forklift is to be left unattended:

1. lower forks to ground,
2. shut off engine,

3. apply hand brake,
4. leave automatic transmissions in "park" or leave manual transmissions in low gear,
5. do not park closer than ten (10) feet to any tracks;
6. do not park on inclines.

[^Top](#)

75.11.5: Wagon Tongue Equipment

A self-propelled lift truck or similar self-propelled equipment with "wagon tongue" type handle must be operated from a trailing position. Do not ride on any part of equipment of this type.

[^Top](#)

Updated: 4/28/2010

[Union Pacific Rules](#)

[Safety Rules](#)

76.0: TOOLS AND MACHINERY

General

- [76.0: TOOLS AND MACHINERY](#)
- [76.1: Use of Tools and Equipment](#)
- [76.2: Inspection of Tools and Equipment](#)
- [76.3: Safety Guards](#)
- [76.4: Assigned Places](#)
- [76.5: Tool Placement](#)
- [76.6: Set Screws](#)
- [76.7: Chuck Wrenches](#)

Hand Tools

- [76.8: Purpose](#)
- [76.9: Swinging Tools](#)
- [76.10: Hammers](#)
- [76.11: Spike Maul](#)
- [76.12: Hand Adze](#)
- [76.13: Sharp Edged Tools](#)
- [76.14: Drift Pin](#)
- [76.15: Banding Tools](#)
- [76.16: Files](#)
- [76.17: Carrying Tools](#)
- [76.18: Bars and Levers](#)
- [76.19: Use of Claw Bars](#)
- [76.20: Lining Bars](#)
- [76.21: Rail Turners](#)
- [76.22: Track Jack](#)
- [76.23: Jacking Equipment](#)
- [76.24: Securing Jacked Equipment](#)
- [76.25: Use of Wrench](#)
- [76.26: Use of Tie or Timber Tongs](#)

Portable Power Tools

- [76.27: Authorized Employees](#)
- [76.28: Fueling](#)
- [76.29: Securing Hose Connections](#)
- [76.30: Insulation/Grounding](#)
- [76.31: Laying Tools Down](#)
- [76.32: Impact Wrenches](#)
- [76.33: Huck Guns](#)
- [76.34: Nail/Staple Guns](#)
- [76.35: Powder-Actuated Tools](#)
- [76.36: Chain Saw](#)
- [76.37: Weed/Brush Cutting](#)
- [76.38: Rail Saws](#)

Fixed Machinery/Portable Equipment

- [76.39: Authorized Employees](#)
- [76.40: Servicing Machines](#)
- [76.41: Left Unattended](#)
- [76.42: Band Saws](#)
- [76.43: Woodworking Machines](#)
- [76.44: Clamping Material](#)
- [76.45: Removing Chips](#)
- [76.46: Pedestal or Bench Mounted Abrasive Grinders](#)
- [76.46.1: Mounting](#)
- [76.46.2: Crack Detection Test](#)
- [76.46.3: Using Grinders](#)
- [76.47: Anvils—Dies—Trip hammers](#)

General

76.0: TOOLS AND MACHINERY

Rules in this chapter, if applicable, apply to both hand and power tools, equipment or machinery.

76.1: Use of Tools and Equipment

Give the operation of tools, equipment and machinery your full undivided attention and wear required personal protective equipment (PPE). Use the correct tool or equipment for the task to be accomplished in accordance with the manufacturer's operating instructions. Improvised, altered or shop made tools or equipment are prohibited unless approved through departmental procedures. Unauthorized use of tools, equipment and machinery is prohibited.

[^Top](#)

76.2: Inspection of Tools and Equipment

Be familiar with the manufacturer's and/or the company's inspection/operating procedures and specific safety rules for the tools and equipment to be used. Prior to use, tools and equipment must be inspected for conditions that might cause the tool or equipment to fail. Conditions to inspect for include, but are not limited to:

- broken, bent, frayed, deformed, cracked, loose, improperly wedged, or damaged handles (wooden handles must not be taped.),
- cracks, burrs or mushrooming,
- excessive wear or cuts,
- unapproved repairs,
- missing guards or parts,
- exposure to excessive heat (as noted by difference in color, warped, etc.) that could affect the hardness or temper of the equipment or tool,
- damage from welding or cutting (as noted by cut marks, pits, gouges, etc.).

Chip protectors must be used on track chisels, drift pins, or similar struck tools.

Note: See ***Rule 1.1.4, Condition of Equipment and Tools.***

[^Top](#)

76.3: Safety Guards

Portable power tools, machinery and equipment must not be operated without required safety guards.

All belts, shafts, gears and other moving parts on machinery must be fully enclosed and guarded.

[^Top](#)

76.4: Assigned Places

Keep tools, materials and supplies in assigned places. Tools and equipment must be returned to storage position when work has been completed. Tools, equipment and materials must be safely and neatly arranged in storage areas, tool bins or designated locations. Hoses and extension cords must be arranged so they will not be a tripping hazard.

[^Top](#)

76.5: Tool Placement

Place tools in safe, secure locations and avoid doing the following:

- placing objects where they are likely to fall or be knocked off,
- placing tools or other objects on ladder rungs, hand holds, running boards, steps, uncoupling levers or other safety appliances,
- sharp edged tools should not be left lying on benches or in other places where they may cause injury, i.e., under scrap paper or rags or among tools in drawers or tool boxes.

[^Top](#)

76.6: Set Screws

Set screws or keys in revolving spindles or shafts and chucks must be flush, countersunk or protected by a collar unless fully enclosed and guarded from exposure.

[^Top](#)

76.7: Chuck Wrenches

Remove wrenches used to tighten chucks on boring mills, lathes, or drills (including portable drills) before operating the machine.

[^Top](#)

Hand Tools

76.8: Purpose

Use tools only for the purpose for which they are designed. When in doubt as to the correct use of a tool, consult your supervisor.

The use of pipes or improvised extensions on tools, wrenches or other devices to gain leverage is prohibited.

[^Top](#)

76.9: Swinging Tools

Stay clear of the swing arc of tools. When using swinging tools, warn others to keep clear. Stand in a position that will direct the tool away from your body in the event the tool strikes a glancing blow. Do not stand on the same side as striker when holding a bar, cutter or punch.

[^Top](#)

76.10: Hammers

Hammers must be used only for their intended purpose.

Type	Intended Use
Claw	For use on soft steel, such as nails. Nails or spikes must be well started before a full blow is struck.
Ball Peen	For use on hard metal, such as a chisel.
Caboose	For emergency use by operating employees.
Sledge	For use on hardened steel.
Rubber Mallet	For use on hard metals.
Soft Metal Hammers	Special applications to prevent damage, i.e. Brass, Aluminum, such as striking reamers, taps, drills, copper, etc. Cutters or other hardened steel tools.

[^Top](#)

76.11: Spike Maul

Inspect the tie plate area and brush away any loose material that might fly on impact. When possible set the spike from the same side of the rail you are standing on, holding the spike palm side up. Strike light blows until the spike is firmly set. Establish good footing, take a firm grip on the handle, keep your eyes on the spike head and spike by swinging the maul in a smooth arc at an even rhythm. Spike mauls must only be used for setting and driving railroad spikes. When two employees are spiking along the same rail, each must spike on their side of the rail, and both must face the same direction. One employee spiking alone may spike over the rail.

System Special Instruction

Change rule to read:

Inspect the tie plate area and brush away any loose material that might fly on impact. When possible set the spike from the same side of the rail you are standing on, holding the spike palm side up. Strike light blows until the spike is firmly set. Establish good footing, take a firm grip on the handle, keep your eyes on the spike head and spike by swinging the maul in a smooth arc at an even rhythm. Spike mauls must only be used for setting and driving railroad spikes. When two employees are spiking along the same rail, each must spike on their side of the rail, and both must face the same direction. One employee spiking alone may spike over the rail.

[^Top](#)

76.12: Hand Adze

Remove nails, dirt, stones and other debris from the item to be adzed. Straddle the item, when possible, and work the adze between the legs, keeping good control to prevent glancing blows. Cut with the grain, notching and chipping out pieces if a considerable amount is to be removed. Keep the cutting edge sharp and free of chips and use special caution when cutting cross-grained lumber, knots, etc.

[^Top](#)

76.13: Sharp Edged Tools

Use the proper tool for the job.

Tool	Intended use and/or special instruction

Wire Stripper	Used to cut wire. Hold the short end of the wire to reduce the danger of flying bits. Always cut at right angle. Cutters are dulled by rocking from side to side or bending the wire back and forth against the cutting blade.
Compound leverage	Used to cut chain, bolts or heavy gauge cutter or bolt cutters wire.
PVC / Hose Cutter	Use for cutting pvc pipe or any hoses especially oxy-acetylene hoses.
Banding cutters	Used to cut bands.
Utility Knives	Safer than hooked or pocket knives for opening cartons. They not only protect the user, but also eliminate deep cuts that could damage the carton contents.
Pocket Knives	Use knives designed with a locked blade no longer than 3 inches in length. Knives must not be used as a substitute for can openers, screwdrivers, ice picks or other tools designed for cutting various material.
Chisel	Mushroomed or damaged chisels must be redressed or destroyed

Note: Use of personal knives is prohibited while on duty or on company property.

~~The use of pocket knives for cutting or removing gaskets is prohibited.~~ Use chemical gasket remover where possible to soften the old gasket and then use a scraper or putty knife to remove the gasket. A gasket grinder may also be used to remove old gaskets. Use a retractable blade utility knife to cut new gaskets. Use clamps to hold down both the template and the gasket material.

When using shape edged tools ~~tools such as knives, chisels and screwdrivers~~, the cutting edges must be directed away from the body or hands. If that is not possible, then the free hand and body should be in a position that place them clear of the blade stroke, and protective clothing should be worn. When wiping the blade, use a towel or cloth (not your own clothing) with the sharp edge turned away from the wiping hand.

System Special Instruction

76.13 Sharp Edged Tools

Change rule to read.

Delete: Pocket Knives from table:

Add Note under table:

Use of personal knives is prohibited while on duty or on company property.

Delete first sentence first paragraph that reads:

The use of pocket knives for cutting or removing gaskets is prohibited.

Change first sentence of second paragraph to read:

When using sharp edged tools, the cutting edges must be directed away from the body or hands.

[^Top](#)

76.14: Drift Pin

Use a drift pin when necessary to align holes for the insertion of rivets, bolts or pins. Fingers must not be used to align holes. Use a hammer to strike the pin. Hit the pin with light blows until it is securely seated in the hole. Be alert when driving a drift pin or bolt to make sure no one is positioned in line with it should it fly out.

[^Top](#)

76.15: Banding Tools

Use caution when handling banding materials and tools. When applying banding, have a firm grip on the bander and do not apply undue tension to the bands. Do not stand in direct line of bands under tension.

Bands must be cut back, secured or removed to prevent cutting or tripping hazards. Scrap banding must be placed in suitable containers for disposal or moved to a safe area. Band cutters must be used to cut band. When cutting bands from bundles, position yourself so that you will not be struck should material fall from the stack.

[^Top](#)

76.16: Files

Files must be cleaned by using a wire brush and not by striking against a vise or other metal object. They must not be hammered or used as a pry, punch, chisel or any other type of tool. Files must have wooden or plastic handles attached.

[^Top](#)

76.17: Carrying Tools

Long handled tools must not be carried in such a manner that will present a hazard to yourself or others. Carrying file, ice pick or other pointed tool, unless point is protected is prohibited.

[^Top](#)

76.18: Bars and Levers

Do not sit, stand on or straddle a bar or lever. While using bars, levers or tools:

- brace yourself,
- be alert to the bar or lever slipping or moving unexpectedly,
- place hands and feet to prevent injury,
- do not over exert.

Do not use bars that are broken, bent, chipped or that have been welded on.

[^Top](#)

76.19: Use of Claw Bars

Place the claw securely under the spike head. If you are unable to get the claw under the spike head, use the pointed end of the bar and pry up the edge of the tie plate enough to permit the claw to seat completely under the spike head, or use a spike lifter. With firm footing, stand beside the claw bar and position your hands below the notch in the handle to prevent striking hand on opposite rail, should the spike break or release suddenly. Work the spike up with short, firm thrusts. If additional leverage is needed, use a piece of wood under the heel of the claw bar. When using the claw bar to nip tie plates, be sure the end is well underneath so it will not slip. Do not strike the handle of a claw bar with another tool.

[^Top](#)

76.20: Lining Bars

When nipping ties or lining track, make sure the bar is placed in the ballast sufficient to prevent it from slipping out when force is applied. Apply force smoothly and assume a firm stance to maintain balance should the bar slip.

Use a piece of wood as a fulcrum to multiply your force on the tie.

Do not use a lining bar to turn a rail.

[^Top](#)

76.21: Rail Turners

The ratchet rail turner or rail fork is the only hand tool that may be used to turn a rail.

[^Top](#)

76.22: Track Jack

Track jack must be inspected before using for:

- cracked base,
- broken pawl lever,
- missing ratchet or operating lever pins,
- any debris in the ratchet mechanism.

Do not strike the jack with tools to force it under a load. The jack base must be placed on an even and firm surface to prevent shifting or kicking out. The lifting surface must be placed fully under the load. No more than two people may operate the jacking lever.

A lining bar must be the only bar used to operate a mechanical track jack. Stand beside the bar and assume a stable position and pump it in an even rhythm. Do not straddle, sit or stand on the lining bar. Keep body clear of pinch points. Remove the lining bar from the jack when the jack is not being operated.

Before tripping or lowering the jack under load, make certain that all employees, tools and materials are in the clear. Jack must not be set for tripping until ready to release the load. Do not walk track jack down.

Mechanical track jack or step jack must not be used by the Locomotive and Car Departments.

[^Top](#)

76.23: Jacking Equipment

Only approved jacks will be used to lift cars or locomotives. When necessary to jack a locomotive, car or other heavy equipment in order to remove trucks, wheels, couplers, etc.:

- Jacks must be of sufficient capacity to handle the lift.
- Jack pad or footing under jack must be sufficient to handle the lift. If blocking is used, it must be capable of handling the lift.
- Jack must be level and the jack head must contact the jacking point as completely as possible.
- Jack or secondary support must be positioned under the load at a location where there is sufficient strength to support the equipment.
- A five minute settling period must be observed when jacking on unpaved or uneven surfaces.

Do not jack metal against metal, except when using track jacks or vehicle jacks. When mechanical, hydraulic or air jacks are used, a piece of wood, a minimum of one-half inch and a maximum of one inch thick, large enough to cover the jack head, must be inserted between the jack head and the load. Approved rubber pads may be used when using stationary jacks.

Do not go under or place any part of your body under the load or in line of applied force, unless equipment or load is secured as per Rule 76.24.

[^Top](#)

76.24: Securing Jacked Equipment

Follow these precautions when jacking equipment:

1. Wheels must be chocked to prevent equipment movement, except where one-spot in-floor jacks are being used.
2. Do not go under or place any part of your body under equipment unless it is secured from movement and has proper secondary support in place. Secondary support shall consist of:
 - Stands or blocking of sufficient capacity to support the load.
 - In rip track or shop applications, using in-floor jacks with positive stop features ~~or concrete jacking pads, self-locking mechanisms or load holding rings~~ will be considered the same as using secondary support; otherwise, stands or blocking must be used.
3. To be effective, load must be lowered until a portion of it rests on the secondary support.
4. Always consider other options and methods to preclude having to place any part of your body under a jacked load or in line of applied force. When trucks are under car, use the proper tool to remove or position the center pin.

Note: Car shops using in-floor jacks with self-locking mechanism and rip tracks using concrete jacking pads with stands or blocking will be considered secondary support. Portable

jacks with locking rings (i.e. electric powered hydraulic jack) will not be used as secondary support or a jack stand.

System Special Instruction

76.24 Securing Jacked Equipment

Under part 2. change second bullet to read:

- In rip track or shop applications, using in-floor jacks with positive stop features will be considered the same as using secondary support; otherwise, stands or blocking must be used.

Add Note: Car shops using in-floor jacks with self-locking mechanism and rip tracks using concrete jacking pads with stands or blocking will be considered secondary support. Portable jacks with locking rings (i.e. electric powered hydraulic jack) will not be used as secondary support or a jack stand.

[^Top](#)

76.25: Use of Wrench

Take the following precautions when using wrenches:

- Place the wrench so the turn will be toward the open end of the jaws.
- Select the proper size wrench for the job. Do not use any object as a shim between the wrench jaws and the nut and bolt head, or use another object to make the wrench fit.
- Brace your body securely to prevent injury in case the wrench slips or the wrench, bolt, nut or other object fails.
- Make sure the wrench is pulled toward the body, whenever possible.

Note: See **Rule 76.8, Purpose.**

[^Top](#)

76.26: Use of Tie or Timber Tongs

Tongs must be set firmly and a steady force applied. When making pull, stand braced with your feet apart and with one foot behind the other. Use tie tongs when handling individual ties.

[^Top](#)

Portable Power Tools

76.27: Authorized Employees

Only authorized employees are permitted to operate portable power tools.

[^Top](#)

76.28: Fueling

Note: See **Rule 72.17.1, Fueling Portable Power Equipment.**

[^Top](#)

76.29: Securing Hose Connections

Air connections must be secured and must not be uncoupled without first closing the air valve and relieving line pressure, unless equipped with quick disconnect. Whip checks or hoses equipped with check valves in both ends must be used. Wire must not be used in air or hydraulic couplings in place of clip pins.

[^Top](#)

76.30: Insulation/Grounding

Power cord insulation and connections on electrically powered tools shall be frequently inspected and maintained in a safe condition. Unless the tool is of the double insulated type, electric power tools must be grounded. If so equipped, the ground prong must be used.

Note: See **Rule 78.2, Electrical Cords.**

[^Top](#)

76.31: Laying Tools Down

Do not lay down a pneumatic, electric or other power tool with the motor running. Power tools must be placed so they will not be started accidentally. When unattended, the power source must be disconnected.

Do not lay power tools on wet surfaces or in loose soil.

[^Top](#)

76.32: Impact Wrenches

Do not use hand sockets on impact wrenches. Nails, wire or cotter pins must not be used to hold sockets in place.

[^Top](#)

76.33: Huck Guns

Huck guns and all hydraulic two-piece rivet guns must be held perpendicular to the surface to which the bolt is being applied. Hands and fingers must not be placed between the huck tools and/or parts being fastened as the tool tightens the collar.

[^Top](#)

76.34: Nail/Staple Guns

Keep nail/staple guns pointed away from the body and other persons. Ensure that no one is located behind the object being nailed or stapled into.

[^Top](#)

76.35: Powder-Actuated Tools

Only authorized employees are permitted to use powder-actuated tools (i.e., Hilti guns, nail guns, etc) and must follow manufacturer's instructions. Treat powder actuated tools with the same respect extended to firearms.

[^Top](#)

76.36: Chain Saw

Follow the manufacturer's instructions when operating chain saws. Operators must wear:

- dust goggles or face shield with safety glasses,
- gloves,
- long-sleeved shirt,
- chain saw chaps,
- hearing protection.

All chain saws should have a chain brake. Those saws not equipped with a chain brake must have a tip protector.

Be alert for conditions which may adversely affect footing and safe operation of the saw. Avoid cutting directly overhead. Where there is a fire hazard, a fire extinguisher and shovel must be immediately available when using a chain saw.

[^Top](#)

76.37: Weed/Brush Cutting

Before operating grass, weed or brush cutting devices make sure guards are in place.

[^Top](#)

76.38: Rail Saws

A rail saw can be powered by gasoline, hydraulic or electric. Rail saws are only to be used to cut rail.

When operating a rail saw:

- Do not operate a rail saw unless you have been properly trained in its safe use and follow all of the manufactures instructions.
- The guide support arm must be used when cutting rail (freehand cutting is prohibited).
- Warn others that you are about to begin cutting rail.
- Personnel are prohibited from standing in front of the rail saw when rail is being cut.
- Required Personnel Protective Equipment (PPE) must be used when operating a rail saw.
- Inspect equipment regularly to ensure it is operating safely and efficiently.
- Do not fuel a gasoline powered rail saw closer than 20 feet from where the rail is to be cut.

[^Top](#)

Fixed Machinery/Portable Equipment

76.39: Authorized Employees

Only authorized employees are permitted to operate machinery or equipment.

[^Top](#)

76.40: Servicing Machines

Follow manufacturer's recommendations for servicing machinery. Ensure that all safety guards or safety devices are replaced and operable before machine is returned to service. Follow Environmental Guidelines to dispose of waste products.

Note: *Safety Resource Manual, Lockout/Tagout Policy, Section IV-H.*

[^Top](#)

76.41: Left Unattended

Do not leave running machines unattended.

[^Top](#)

76.42: Band Saws

The length of blade exposed must be no greater than the thickness of the stock being cut plus one-half inch. Stock must be fed gradually and steadily. The blade must not be twisted or crowded.

[^Top](#)

76.43: Woodworking Machines

Exercise caution when operating woodworking machines:

- Stand to one side and not directly in back of the material being fed to any saw.
- Use a push stick to feed narrow material.
- Do not reach over circular saws.
- Do not operate circular rip saws with the hood, spreaders or kick back devices removed

or rendered inoperative.

- Provide an adjustable stop to prevent the forward travel of the blade beyond the position necessary to complete the cut in repetitive operations with circular saws.
- An effective device must be provided to return the radial saw automatically to the back of the table when it is released at any point of travel.
- Joiner must have a guard that automatically adjusts itself to cover the part of the cutting head not protected by the material being processed. The guard must provide protection for the entire length of the cutting space. The exposed part of the cutting head at the rear of the fence must be covered, and the knife must not project more than one-eighth inch beyond the cylindrical body of the cutting head.
- Dead plates on planers must not be lowered while material is in the machine and the machine is running.

[^Top](#)

76.44: Clamping Material

Material must be firmly clamped to the machine before work is performed, where required.

[^Top](#)

76.45: Removing Chips

Do not remove chips or shavings from a drill press lathe or other machine by hand. Use a brush, vacuum equipment or tools made for that purpose.

[^Top](#)

76.46: Pedestal or Bench Mounted Abrasive Grinders

[^Top](#)

76.46.1: Mounting

Prior to mounting, all wheels must be inspected for damage and cracks. Wheels which show any evidence of cracks, abusive handling or abusive storage shall not be mounted. Before mounting, spindle speed of grinder must be checked to ensure that it does not exceed the maximum operating speed marked on the wheel.

Blotters must be used between flanges and abrasive wheel surface to insure uniform

distribution of flange pressure. Flanges must be the same size and shall not be less than one-third the wheel diameter. The blotters shall cover the entire contact area at the wheel flanges.

[^Top](#)

76.46.2: Crack Detection Test

When performing a Ring Test:

- The ring test depends on the damping characteristics of a wheel to alter the sound emitted when the wheel is tapped lightly.
- To perform the ring test, wheels should be tapped gently with a light non metallic tool, such as the handle of a screwdriver.
- Support the wheel through the center hole with a non-sound conducting holders such as a wooden dowel.
- Tap wheel about 45 degrees each side of the vertical center line and about one or two inches from the periphery.
- Rotate the wheel 45 degrees and repeat the test.
- This will result in four locations on the wheel being tested.
- A sound and undamaged wheel will give a clear tone. If cracked, there will be a dead sound. If this occurs, the wheel must not be used.
- Wheels must be dry and free from sawdust when applying the ring test.

[^Top](#)

76.46.3: Using Grinders

When using grinder:

- Prior to doing any work with the grinder, it must be run for one minute. During this period of time, the operator must stand to the side of the machine and check for excessive vibration. Should there be excessive vibration, the machine must be shut down and supervisor notified.
- When wheel is cold, apply grinding force gradually and uniformly to prevent thermal shock which may cause wheel to break.
- Do not grind on sides of abrasive wheels.
- Do not allow the tool rest to be more than one-eighth inch from the stone.

- Do not allow the distance between the wheel periphery and the adjustable tongue to be more than one-fourth inch.
- Immediately report and replace broken or missing shields.
- If needed, protect arms with a long sleeved shirt and use leather gloves to hold material while grinding. However, glove fingertips must not extend past the outer edge of the tool rest.
- Do not use welding gloves or rags to hold material while grinding.
- Only grind material for which the wheel is designed. Do not grind non-ferrous material (i.e., aluminum, brass or plastic) on wheels designed for grinding steel.

[^Top](#)

76.47: Anvils—Dies—Trip hammers

Do not use your hands to place blocks, tools or other material on anvils, dies or Trip hammers.

[^Top](#)

Updated: 4/06/2010

77.0: MECHANICAL LIFTING/PULLING OPERATIONS

General

- [77.1: Authorized Employees](#)
- [77.2: Inspection](#)
- [77.3: Safe Load](#)
- [77.4: Groundman](#)
- [77.5: Crane Operator](#)
- [77.6: Signals](#)
- [77.6.1: Crane Hand Signals](#)
- [77.6.2: Crane Audio Signals](#)
- [77.7: Emergency Stop Signals](#)
- [77.8: Positioning](#)
- [77.9: Raising Personnel](#)
- [77.10: Operation with Trains Passing](#)
- [77.11: Load Control](#)
- [77.12: Avoiding Falls](#)
- [77.13: Pulling Applications](#)

Mobile Cranes

- [77.14: Safe Load Placard](#)
- [77.15: Boom Inspection](#)
- [77.16: Handling Equipment in Work Train](#)

Overhead Cranes/Hoists

- [77.17: Test Crane/Hoist](#)
- [77.18: Load Movement](#)

Wire Rope

- [77.19: Wire Rope](#)
- [77.19.1: Wire Rope Working Loads](#)
- [77.19.2: Wire Rope Inspection](#)
- [77.19.3: Wire Rope Replacement](#)
- [77.19.4: Wire Rope Handling](#)
- [77.19.5: Wire Rope Maintenance](#)
- [77.19.6: Drum Fastening](#)
- [77.19.7: Sockets, Clamps, and Thimbles](#)

Rigging

- [77.20: Rigging](#)
- [77.21: Fittings](#)
- [77.21.1: Fitting Inspection](#)

- [77.21.2: Fitting Replacement](#)
- [77.21.3: Hooks and Attachments](#)
- [77.22: Wire Rope Slings](#)
- [77.22.1: Wire Rope Sling Inspection](#)
- [77.22.2: Wire Rope Sling Replacement](#)
- [77.23: Chain Slings and Chain](#)
- [77.23.1: Chain Inspection/Replacement](#)
- [77.23.2: Chain Working Loads](#)
- [77.23.3: Chain Lifting Devices](#)
- [77.23.4: Chain Use](#)
- [77.23.5: Chain Lubrications](#)
- [77.24: Synthetic Slings](#)
- [77.24.1: Synthetic Sling Inspection](#)
- [77.24.2: Synthetic Sling Replacement](#)
- [77.25: Webbing and Round Slings](#)
- [77.26: Eye Bolts and Hoist Rings](#)
- [77.27: Ropes](#)

General

77.1: Authorized Employees

Only authorized employees are permitted to operate cranes, hoists, and mechanical lifting/pulling devices. Before authority is granted, employees must be trained in the rules and procedures regarding the equipment's operation and use.

When rules for operation and care are furnished by the manufacturer, they must be observed.

[^Top](#)

77.2: Inspection

All hoisting equipment and rigging must be inspected daily before use and periodically as required. If defects are found, they must be corrected or equipment must be removed from service. Maintain a record of inspections on equipment and have records available upon request.

[^Top](#)

77.3: Safe Load

Do not overload hoisting and rigging equipment.

Do not side-load or drag a load with hoisting equipment.

Raise and lower the load steadily and gradually and do not drop or jerk the load or tackle.

Remove buckets or magnets from crane when handling loads with slings.

[^Top](#)

77.4: Groundman

When a crane or similar unit is being used, when needed, the helper or supervisor in charge, must act

as groundman or assign a competent person as groundman.

The groundman is responsible for directing and safe-guarding all machine movements. Before signaling boom or machine movement, the ground man must see that the load, cab or boom will not come in contact with nearby wires, structures or other objects and persons. Groundmen required to move cars or on-track equipment must be qualified on the use of their braking systems.

Note: See **Rule 78.7, Proper Clearances**.

[^Top](#)

77.5: Crane Operator

The crane operator is responsible for the safety of the crane and for the safety of employees working in the vicinity. He will only take signals given by the groundman, unless the signal is a stop signal.

Equipment controls must not be left during a lift or when a load is suspended; or with the master clutch engaged.

[^Top](#)

77.6: Signals

Use the following signals while operating cranes and hoists. Hand signals must be used whenever possible. If crane hand signals cannot be used, crane audio signals may be used. The crane operator and groundman must agree beforehand on the signals to be used and must use only these approved signals. The crane operator is governed by these signals:

[^Top](#)


77.6.1: Crane Hand Signals

The person giving signals must:

- make sure signals can be plainly seen,
- give signals clearly so they can be understood.

If the person giving signals disappears from the view of the crane operator, movement must be stopped.


STOP

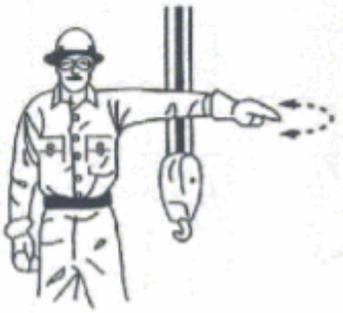

Stop: Arm extend, palm down, move arm back and forth horizontally.

#####


EMERGENCY STOP

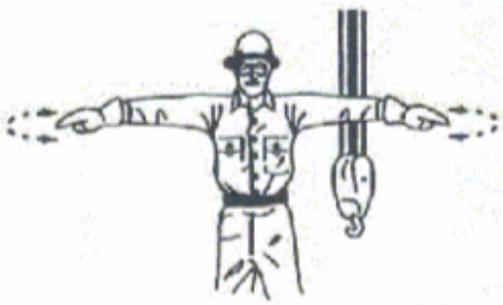

Emergency Stop: Both arms extend, palm down, move arms back and forth horizontally.

#####


DOG EVERYTHING

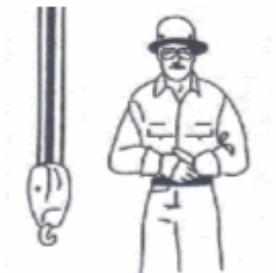

Dog Everything: Clasp hands in front of body.

#####


MOVE SLOWLY

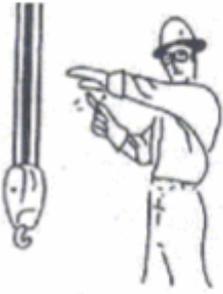

Move Slowly: Use one hand to give motion signal and place other hand motionless in front of hand giving the motion signal.

#####

HOIST

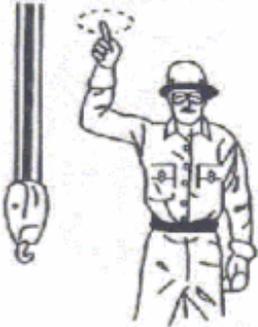

Hoist: With forearm vertical, forefinger pointing up, move hand in small horizontal circle.

#####


LOWER



Lower: With arm extended downward, forefinger pointing down, move hand in a small horizontal circle.

#####

USE MAIN HOIST

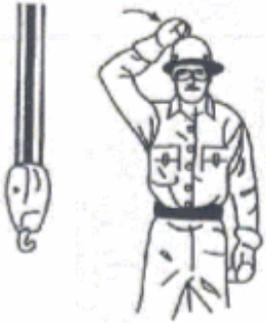

Use Main Hoist: Tap fist on head, then use regular signals.

#####


USE WHIP LINE



Use Whip line: (auxiliary Hoist)
tap elbow with one hand, then use regular signals.

#####


RAISE BOOM

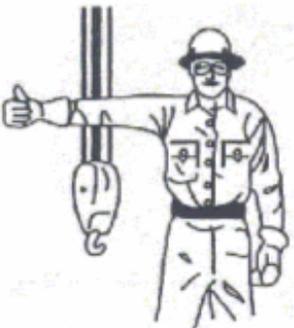

Raise Boom: Arm extended, fingers closed, thumb pointing upward.

#####


LOWER BOOM

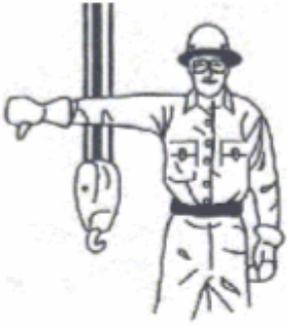

Lower Boom: Arm extended, fingers closed, thumb pointing downward.

#####


RAISE THE BOOM AND LOWER THE LOAD

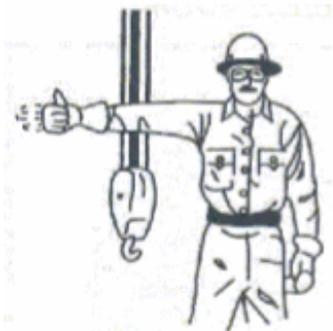

Raise Boom and Lower the Load: With arm extended, thumb pointing up, flex fingers in and out as long as load movement is desired.

#####


LOWER THE BOOM AND RAISE THE LOAD

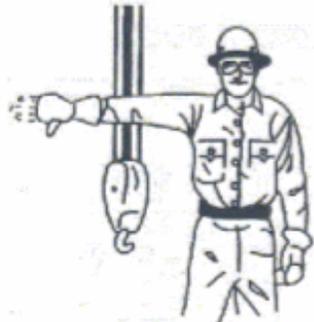

Lower Boom and Raise the Load: With arm extended, thumb pointing down, flex fingers in and out as long as load movement is desired.

#####

SWING

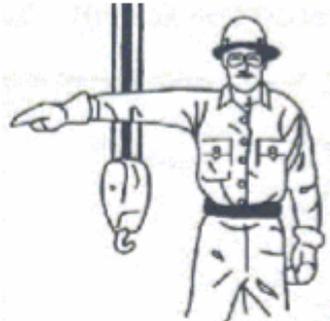

Swing: Arm extended, point with finger in direction of swing of boom.

#####

RETRACT BOOM

(Telescoping Boom)




Retract Boom:

(telescoping booms) One hand signal, fist in front of chest, thumb extended out, heel of fist tapping chest.

#####

RETRACT BOOM

(Telescoping Multiple Booms)

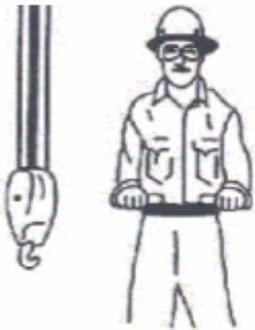

Retract Boom:

(telescoping booms) Both fists in front of body with thumbs pointing toward each other.

#####

EXTEND BOOM

(Telescoping Boom)




Extend Boom:

(telescoping boom)
One hand signal, fist
in front of chest,
thumb extended
and tapping chest.

#####

EXTEND BOOM

(Telescoping Multiple Booms)

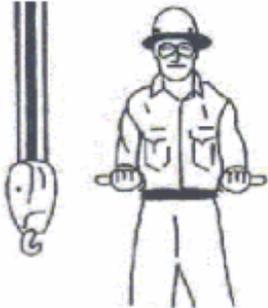


Extend Boom: (telescoping
booms) Both fists in front of
body with thumbs pointing
outward.

#####

TRAVEL

(One track. For crawler cranes only.)

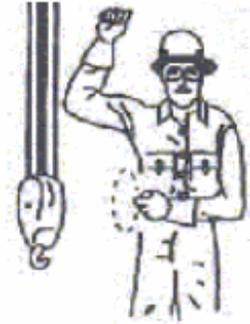


Travel: (one track crawler cranes) Lock the track on the side indicated by the raised fist, and travel opposite track in direction indicated by circular motion of other fist rotated vertically in front of body.

#####

TRAVEL


(Both tracks. For crawler cranes only.)

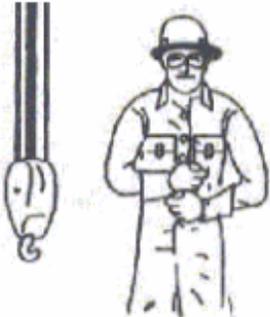

Travel: (both tracks crawler cranes) Use both fists in front of body, making a circular motion about each other, indicating direction of travel, forward or backward.

#####

TRAVEL

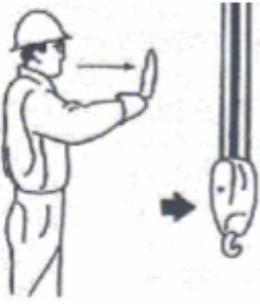

Travel: Arm extended forward, hand open and slightly raised, make pushing motion in direction of travel.

[^Top](#)

77.6.2: Crane Audio Signals

If voice communication is utilized, the voice commands by the groundman to the crane operator shall be in a continuous manner with a pause between a common command of approximately one second in duration per ten feet to the desired lift height. If the proper communication stops, or is not understood, all crane movements shall stop immediately. If special voice commands are required to perform the lift, they shall be mutually agreed upon between the groundman and the crane operator before lifting begins.

Voice Commands shall be as follows:

UP ON THE LOAD,
DOWN ON THE LOAD,
BOOM UP,
BOOM DOWN,
BOOM UP AND LOWER THE LOAD,
BOOM DOWN AND RAISE THE LOAD,
SWING LEFT,
SWING RIGHT,
EXTEND OUT,
RETRACT IN,
STOP.

[^Top](#)

77.7: Emergency Stop Signals

Anyone can give emergency stop signals. The crane operator must immediately recognize and act upon any stop signal or any other motions or movements that might indicate such action is necessary.

[^Top](#)

77.8: Positioning

When working with cranes or other hoisting devices, the groundman and those in the vicinity must:

- position themselves where they cannot be caught between the load being handled and an obstruction,
- stay clear of loads being suspended,
- not be under the crane boom or similar machine
- when it is lifting or suspending a load,
- not stand near or in line with a cable, rope or chain under tension or one that might be tightened at any moment,
- not walk or stand in the path of a load being handled by a crane, hoist or wrecker.

When equipment is being handled by chains, cables or wire ropes, care must be taken to avoid injury in case of breakage. Loads must not be suspended from booms unless the work requires.

In such cases, keep the load secured and as close to the ground as possible. Loads being transported from one point to another must be landed on a flat car or other conveyance to release the weight from the boom during transit.

[^Top](#)

77.9: Raising Personnel

Do not use cranes and derricks to raise or lower persons or any personnel platforms. Only raise and lower persons in an approved aerial basket designed for that purpose. Do not ride on loads or rigging.

[^Top](#)

77.10: Operation with Trains Passing

When trains are passing on adjacent tracks, if any part of equipment or load can foul adjacent tracks, crane operators must make sure:

- work is stopped,
- swing brakes on machines (so equipped) are set,
- tongs, buckets, loads, or lines come to rest on the ground or car.

Note: See ***MOWR Rule 43.10, Protecting Against Passing Trains.***

[^Top](#)

77.11: Load Control

A load that is suspended or being lifted should be pushed instead of pulled. Hands must not contact wire rope or sheaves on hoisting equipment with load attached unless absolutely necessary, and then only after notifying operator. Where necessary, use non-conductive tag lines or a non-conductive push stick to prevent uncontrolled movement.

Precautions must be taken to ensure against load swaying or turning. Crane, hoist or wrecker must not be moved if load is swaying or turning excessively.

[^Top](#)

77.12: Avoiding Falls

Maintain secure footing and a firm hand hold to avoid falling when standing on load to adjust cable, chain, sling or hook.

[^Top](#)

77.13: Pulling Applications

When wire rope, chain, synthetic tow straps or similar devices are used for pulling applications (i.e., dragging rail, straightening safety appliances, aligning drawbars, towing vehicles, etc.), take precaution to avoid personal injury or property damage.

- Inspect the equipment to ensure it is in good condition and has the capacity to handle the task.
- Protect pulling device from sharp corners or objects.
- Do not jerk against the load being pulled. Make all movements smoothly.
- Position yourself and others where no one can be struck or injured should the pulling device or attachments fail. Protect yourself from possible whipping or recoil action should the device release suddenly.

[^Top](#)

Mobile Cranes

77.14: Safe Load Placard

Equipment for lifting, hoisting or handling material must have a placard posted where it is visible to the crane operator. The placard indicates the safe loads at various radii. Crane operators must be familiar with the safe lifting capacity, at minimum and maximum radius and with or with out outriggers, as specified on the placard. **Do not handle loads that exceed the load chart capacities.**

[^Top](#)

77.15: Boom Inspection

Booms must be lowered for inspections, lubrication and repairs.

[^Top](#)

77.16: Handling Equipment in Work Train

When equipment with booms, leads or other attachments is being handled in work train service, the crane operator must remain on the machine during all movements of the train unless the machine has been securely blocked to protect against swinging or other movements that may cause an accident.

Properly block machines mounted on top of or working from flat cars to prevent the machine from moving when cars are being switched or moved. Do not block the machine when it is being used and is under the control of a crane operator.

[^Top](#)

Overhead Cranes/Hoists

77.17: Test Crane/Hoist

Test Crane/Hoist at the beginning of each shift or prior to first use. Notify personnel in the area that the crane/hoist will be tested and to stay clear. Verify that crane/hoist is operable and the hook is free of obstructions and is not attached to a load. Test operating controls to ensure trolley, bridge, and hoist

movements and brakes are properly adjusted.

[^Top](#)

77.18: Load Movement

When traveling, sound alarm frequently if not automatically actuated. Suspended load must not pass over any individual or come in contact with equipment or other objects along the load path.

[^Top](#)

Wire Rope

77.19: Wire Rope

[^Top](#)

77.19.1: Wire Rope Working Loads

Use only the wire rope recommended by the manufacturer. Ensure that the wire rope has the required certification paper detailing size, construction, type of lay, breaking strength and other pertinent information.

[^Top](#)

77.19.2: Wire Rope Inspection

Visually inspect all running ropes in use once every working day. Thoroughly inspect all ropes in use at least once a month.

Note any defects, such as those described below to determine whether using the wire rope would be unsafe.

- Rope diameter below nominal diameter because of:
 - Loss of core support
 - Internal or external corrosion
 - Stretch or wear of outside wires
- A number of broken outside wires, or inside valley wires, with large concentrations of broken wires distributed throughout.
- Worn outside wires.
- Corroded or broken wires at end connections.
- Corroded, cracked, bent, worn, or improperly applied end connections.
- Severe kinking, crushing, cutting, or unstranding.

[^Top](#)

77.19.3: Wire Rope Replacement

If any of the following conditions exist, replace the wire rope:

- In running ropes, six or more randomly distributed broken wires in one lay or three or more broken wires in one strand in one lay. (One lay of wire rope is the distance along the wire rope in which one strand makes a complete revolution around the rope.)
- Wear of one-third of the original diameter of outside individual wires.

- Kinking, crushing, bird-caging, or any other damage that distorts the wire rope structure.
- Evidence of any heat damage.
- Nominal diameter reduced by more than:
 - 3/64 inch for diameters up to and including 3/4 inch.
 - 1/16 inch for diameters 7/8 inch to 1-1/8 inches.
 - 3/32 inch for diameters 1-1/4 inches to 1-1/2 inches.
- In standing ropes, more than two broken wires in one lay in sections beyond end connections.
- For any wire rope, one or more broken wires at an end connection. For this type of break, if the wire rope is long enough, cut off 6 to 8 feet of rope from the end connection and make a new connection.
- One or more broken wires in running rope, with breaks in the valleys between strands.

Exception: Wire rope, removed from service, may be used in non-critical applications such as tie downs, closing line for buckets, etc.

[^Top](#)

77.19.4: Wire Rope Handling

Handle wire rope as follows before and during installation:

- Store wire rope to prevent damage or deterioration and lubricate to prevent corrosion or rust.
- Unreel or uncoil wire rope as recommended by the rope manufacturer. Handle wire rope with care to avoid kinking or causing a twist.
- Before cutting a wire rope, place seizings on each side of the spot where the wire rope will be cut to prevent the strands from unlaying. Place the seizings as follows:
 - On preformed wire rope, place one seizing on each side of the cut.
 - On non-preformed wire ropes of 7/8-inch diameter or smaller, place two seizings on each side of the cut.
 - For non-preformed wire ropes 1 inch or larger, place three seizings on each side of the cut.
- During installation, avoid dragging the wire rope in dirt or around objects that will scrape, nick, crush or cause sharp bends in the wire rope.

[^Top](#)

77.19.5: Wire Rope Maintenance

Keep wire rope well lubricated to reduce internal friction and prevent corrosion. Verify that the lubricant is compatible with the original lubricant by consulting the wire rope manufacturer. When lubricating the wire rope, pay particular attention to sections of the wire rope located over sheaves or otherwise hidden during inspection and maintenance procedures. Periodic field lubrication is particularly important for non-rotating wire rope.

Minimize excess lubricant, which could cause safety or environmental hazards.

[^Top](#)

77.19.6: Drum Fastening

Securely fasten one end of the wire rope to the drum or reel. Do not allow the wire rope to fully unwind; at least two full turns must always remain on the drum or reel. Securely fasten the lifting or “dead” end of the wire rope to the block, device or reel with a tapered socket or an oval thimble.

[^Top](#)

77.19.7: Sockets, Clamps, and Thimbles

Use wire rope sockets on all hoisting lines at the bucket or hoist hook end, where facilities permit proper application. Otherwise, use the proper size of thimbles and apply:

- Three properly sized clamps on 3/4-inch wire ropes and under.
- Four clamps on 7/8-inch wire ropes.
- Five clamps on 1-inch to 1-1/4 inch wire ropes, inclusive.
- Six clamps on 1-3/8 inch and larger wire ropes. Make sure clamp spacing is no less than six times the diameter of the wire rope. Apply U-bolt over dead end of the wire rope. Live end of the wire rope rests in the saddle. Clamps must be retorqued a second time after lifting first load. "Never saddle a dead horse."

[^Top](#)


Rigging

77.20: Rigging

Use slings, either wire rope, chain or synthetic fiber that are certified to handle the load.

While determining the strength of the sling, consider that the stress in a sling varies with the angle of its legs.

The following diagrams illustrate how the stress is increased as the angle of the legs with the horizontal is decreased. Stress for any other load will be directly proportional.

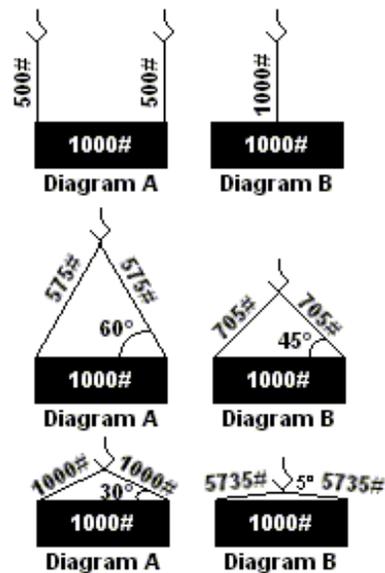

[^Top](#)

77.21: Fittings

[^Top](#)

77.21.1: Fitting Inspection

Fittings shall be inspected:

- upon purchase,
- prior to each use.

[^Top](#)

77.21.2: Fitting Replacement

Conditions such as the following are reasons for replacement:

- Any significant permanent deformation, or change in shape, indicates it has been overloaded.
- No more than 10% wear of any sectional dimension. This is measured by comparing to a section of fitting that has no wear, or to catalog dimensions.
- Any crack, sharp nick or gouge in the surface of any fitting.
- Any modification of any fitting is cause for removal from service. Welding or heating, substitution of parts and bending on any fitting are examples of modifications.
- More than one broken wire at any (within one wire rope diameter of the fitting) termination is cause for removal from service.

[^Top](#)

77.21.3: Hooks and Attachments

Non-alloyed carbon-steel hooks, repair links or other attachment must not be used. Homemade or makeshift bolts, rods, shackles, hooks or other attachments must not be used unless approved through departmental procedures. Handles and other attachments must not be welded to hooks. Hooks must be replaced if they have a twist of 10 degrees or more or a 15% increase in the throat opening.

Hooks equipped with safety latches must have them in place prior to use.

Dye penetrant or equivalent testing must be conducted on crane hooks annually. Hooks purchased after Sept. 30, 1991, require a dated record of proof load testing.

[^Top](#)

77.22: Wire Rope Slings

[^Top](#)

77.22.1: Wire Rope Sling Inspection

Inspect wire rope slings prior to each use. In addition, a periodic inspection shall be performed by a designated person and shall include a record of the inspection. Inspection shall look for:

- distortions of the wire rope in the sling such as kinking, crushing, unstranding, birdcaging, main strand displacement or core protrusion,
- general corrosion,
- broken or cut strands,
- number, distribution and type of visible broken wires,
- loss of wire rope diameter in short rope lengths or unevenness of outer strands.

[^Top](#)

77.22.2: Wire Rope Sling Replacement

Conditions such as the following are reasons for replacement:

- For strand laid and single part slings ten randomly distributed broken wires in one wire rope lay, or five broken wires in one rope strand in one rope lay.
- Severe localized abrasion or scraping.
- Kinking, crushing, birdcaging, or any damage resulting in distortion of the wire rope structure.
- Evidence of heat damage.
- End attachments that are cracked, deformed or worn to the extent that the strength of the sling is substantially affected.
- Severe corrosion of the wire rope or end attachments.

[^Top](#)

77.23: Chain Slings and Chain

[^Top](#)

77.23.1: Chain Inspection/Replacement

Check chain and attachments prior to each use. Conditions such as the following are reasons for replacement:

- Wear, nicks, cracks, breaks, gouges, bends and weld splatter.
- Elongation: must not exceed 15%.
- Discoloration from excessive temperature and throat openings of hooks.
- Chain links and attachments do not hinge freely to adjacent links.
- Latches on hooks, if present, do not hinge freely, seat properly or are permanently distorted.
- Missing or unreadable sling identification tag.

[^Top](#)

77.23.2: Chain Working Loads

Grade 80 or above high-strength alloy is the only chain to be used for lifting, hoisting, pulling or any other load bearing application; unless the chain is supplied and certified by a manufacturer as a part of a manufactured device, i.e., a lifting sling, chain hoist, etc.

[^Top](#)

77.23.3: Chain Lifting Devices

All lifting devices, such as hooks, links, pins, etc., must be made of alloy steel. Do not use lifting devices made of mild steel or rolled steel under any circumstances.

[^Top](#)

77.23.4: Chain Use

To avoid personal injury or chain damage:

- Keep chains free of twists, kinks or knots and make sure grab hooks fit the chain and are placed on the hitch

so that no side strain occurs during the lift.

- Do not impact load or jerk chain. Apply load slowly.
- Protect chain from sharp corners and objects. Protect chain from corrosion and high temperature.
- Do not use "patent links," "repair links," or "figure eight" links when repairing lifting chains.

[^Top](#)

77.23.5: Chain Lubrications

Lubricate chains as required when operating them over sheaves or pulleys. Use an approved lubricant to ensure maximum chain life. Minimize excess dripping of lubricant.

[^Top](#)

77.24: Synthetic Slings

[^Top](#)

77.24.1: Synthetic Sling Inspection

Inspect synthetic slings prior to each use. In addition, a periodic inspection shall be performed by a designated person and shall include a record of the inspection.

[^Top](#)

77.24.2: Synthetic Sling Replacement

Conditions such as the following are reasons for replacement:

- acid or caustic burns,
- melting or charring of any part of the sling,
- tears, cuts, or snags,
- broken or worn stitching in load bearing splices,
- excessive abrasive wear,
- knots in any part of the sling or slings tied together,
- excessive pitting or corrosion, or cracked, distorted or broken fittings,
- other visible damage that causes doubt as to the strength of the sling,
- missing or unreadable sling identification.

[^Top](#)

77.25: Webbing and Round Slings

All of the fibers in a webbing sling are load bearing. In a round sling, the load bearing fibers are "wound" within a protective jacket. The protective jackets are not load bearing and protect the load bearing fibers. Do not bunch or pinch the sling in fittings.

Conditions such as the following are reasons for replacement:

- missing or unreadable tags,
- melting, charring or weld splatter of any part of round sling,
- holes, tears, cuts, embedded particles, abrasive wear, or snags that expose the core fiber,

- broken or worn stitching in the cover which exposes the core fibers.

[^Top](#)

77.26: Eye Bolts and Hoist Rings

The use of eye bolts at the load connection causes the horizontal sling angle to become smaller as the loads on each leg and each eye bolt increases. As the eye bolt becomes side loaded, the eye bolt loses strength. Select the proper size swivel hoist ring to allow for load in sling leg. Follow these guidelines:

- do not exceed working load limits,
- do not use regular nut eye bolts for angular lifts,
- always use shoulder nut eye bolts for angular lifts,
- always tighten nuts securely against the load,
- always apply load to eye bolt in the plane of the eye,
- when using lifting slings of two or more legs make sure the forces in the leg are calculated.

[^Top](#)

77.27: Ropes

Inspect all manila, hemp, or synthetic fiber ropes before they are used for lifting. Remove any frayed, cut, or defective rope from service immediately.

[^Top](#)

Updated: 4/28/2010

78.0: ELECTRICAL

- [78.1: Authorized Employees](#)
- [78.2: Electrical Cords](#)
- [78.3: Electrical Panels](#)
- [78.4: Voltage Rated Rubber Gloves](#)
- [78.5: Shorting Electrical Circuits](#)
- [78.6: Working Near Power Lines](#)
- [78.6.1: Measuring Overhead Clearance](#)
- [78.7: Booms Near Power Lines](#)
- [78.7.1: Proper Clearances](#)
- [78.7.2: Stationary Worksites](#)
- [78.8: Power Supply Turned Off](#)
- [78.9: Handling Electrical Wires](#)
- [78.10: Lockout/Tagout](#)

78.1: Authorized Employees

Only authorized employees are permitted to:

- work on electrical apparatus of equipment,
- to climb poles and replace fuses on power poles or work on transformers,
- work on lines or equipment energized in excess of 50 volts phase to ground.

Note: See ***Safety Resource Manual, Electrical and High Voltage Policy, Section IV-AB and Section IV-AF.***

[^Top](#)

78.2: Electrical Cords

Inspect electrical cords and make sure they are in good condition and have a ground. Follow these guidelines for using cords:

Use cords in an approved manner. Electric power tools must not be picked up or lowered by the power cord.

- Do not remove the grounding prong.
- Do not overload electrical outlets. The use of a ground fault circuit interrupter (GFCI) is required for use in any work environment that is or may become wet and any other areas that are highly grounded.

The use of a ground fault circuit interrupter (GFCI) is required for use in any work environment that is or may become wet and any other areas that are highly grounded. For example, a work area with a metal floor.

Note: See ***Rule 76.30, Insulation/Grounding.***

[^Top](#)

78.3: Electrical Panels

In shop areas, the floor area in front of electrical control boxes must be kept clear of any obstruction. The cleared surface must be painted red with a white border to extend a minimum of 36 inches forward of the control box and a minimum of 36 inches wide, or the width of the box, whichever is greater, and stenciled with wording "KEEP CLEAR."

Circuit breakers must be properly labeled as to the circuit controlled.

[^Top](#)

78.4: Voltage Rated Rubber Gloves

Wear voltage rated rubber gloves when working on energized circuits of 300 volts or more.

Gloves must be tested before use by inflating with air. If there are any leaks, a glove finger must be removed so the glove cannot be used.

[^Top](#)

78.5: Shorting Electrical Circuits

Use only approved nonmetallic cased flashlights around electrical equipment. Conductive articles of jewelry and clothing must not be worn in locations with exposed energized parts.

Examples of conductive articles are metal watches, rings, bracelets, metal headgear or clothing with conductive thread.

[^Top](#)

78.6: Working Near Power Lines

When performing work near electrical power lines, the clearance shown below must be maintained between personnel, their tools and equipment, and the nearest power line. When booms are used in the vicinity of power lines, Rule 78.7, Booms Near Power Lines, applies.

Operating Voltage	Distance in Feet
0-5,000	4
5,000-15,500	6
15,500-25,000	7-1/2
25,000-35,000	9
35,000-50,000	12

Note: *For voltages over 50,000 volts, add 1.2 inch for each KV (1,000 volts).*

[^Top](#)

78.6.1: Measuring Overhead Clearance

A qualified person is required to measure overhead clearances using the proper instruments. Do not use steel or cloth tapes, ropes or strings to measure overhead clearance.

[^Top](#)

78.7: Booms Near Power Lines

Do not operate booms over power lines at any time. Do not operate them under power lines unless proper clearance is maintained.

If proper clearance cannot be maintained, shut off the power and ground power lines before performing work.

[^Top](#)

78.7.1: Proper Clearances

If booms must be operated near energized lines, the following clearances must be maintained:

- Lines rated 50 KV (50,000 Volts) or less, minimum clearance between the lines and any part of the crane or load must be 10 feet.
- Lines rated over 50 KV (50,000 Volts) and less than 170 KV (170,000 Volts), minimum clearance between the lines and any part of the crane or load must be 15 feet.
- Lines rated over 170 KV (170,000 Volts), minimum clearance between the lines and any part of the crane or load must be 15 feet plus 1/2 inch per KV in excess of 170 KV (170,000 Volts).
- When in transit, with no load and boom lowered, the equipment clearance must be a minimum of 8 feet for voltages less than 15 KV and 10 feet for voltages 15 to 50 KV. For voltages 50 to 470 KV, the clearance must be increased 1/2 inch per KV in excess of 50 KV.

A groundman must be designated to observe equipment clearance and give timely warning for all operations when it is difficult for the operator to observe clearance.

Note: See **Rule 77.4, Groundman.**

[^Top](#)

78.7.2: Stationary Worksites

At stationary worksites, crane operators must place at least three orange cones along the minimum clearance line to mark the minimum safe working distance to overhead power lines.

[^Top](#)

78.8: Power Supply Turned Off

When necessary to perform work that will not permit maintaining the clearance outlined in the previous rules, notify the power company or controlling authority and have them turn off the power supply for the affected district. Do not start any work until authorized by the power company or controlling authority. Do not turn the power back on until authorized by a supervisor.

When performing work near a 2,400-volt or greater signal line that will not permit the clearance outlined, notify the signalman to switch the power off to that portion of line. Do not start work until the signalman says that the power has been switched off. Make sure the signalman understands not to switch power on again until advised by the supervisor in charge of the work.

If the power must be switched off, equipment must be kept at least one half the clearance distance indicated, but in no case may the clearance be less than 4 feet.

[^Top](#)

78.9: Handling Electrical Wires

Immediately report electrical wires found broken, crossed or on the ground to the train dispatcher or proper authority. Do not consider any electrical wire dead until positive information has been received that it has been de-energized and is safe to handle. If an emergency requires an employee to separate live electrical wires, the employee must be able to grab onto a dry hand line or other dry rope while standing on a dry board or pole and must not get closer than 5 feet to the electrical wire being handled.

[^Top](#)

78.10: Lockout/Tagout

Lockout or tagout a disconnected electrical switch before doing maintenance or repair work. Do not remove warning signs or blocks placed on locks by other employees or close any switch so protected, unless authorized to do so by the employee(s) who placed it there for his or her protection.

Note: See ***Safety Resource Manual, Lockout / Tagout Policy, Section IV-H.***

[^Top](#)

Updated: 4/28/2010

79.0: WELDING

Cutting, Welding or Heating

- [79.0: WELDING](#)
- [79.1: Authorized Employees](#)
- [79.2: Protective Equipment](#)
- [79.2.1: Eye Precautions](#)
- [79.2.2: Shielding](#)
- [79.2.3: Proper Clothing](#)
- [79.2.4: Cleaning Work Area](#)
- [79.3: Fire Protection](#)
- [79.3.1: Protecting Area](#)
- [79.3.2: Welding, Heating or Cutting on Freight Cars](#)
- [79.3.3: Welding, Cutting or Heating on Tank Cars](#)
- [79.4: Repairs or Alterations](#)
- [79.5: Equipment Condition](#)
- [79.6: Ventilation](#)
- [79.7: Confined Spaces](#)
- [79.7.1: Safety Precautions](#)
- [79.8: Hot Work](#)
- [79.9: Use of Oxygen](#)
- [79.10: Oil and Grease](#)
- [79.11: Hot Metal Precautions](#)
- [79.12: Exposure to Excessive Heat](#)
- [79.13: Cutting Under Tension](#)
- [79.14: Cylinders](#)
- [79.14.1: Storing Cylinders](#)
- [79.14.2: Working with Cylinders](#)
- [79.14.3: Transporting Cylinders](#)
- [79.14.4: Empty Cylinders](#)
- [79.14.5: Leaking Cylinder](#)
- [79.14.6: Changing Cylinders](#)
- [79.15: Regulators](#)

- [79.15.1: Proper Regulator](#)
- [79.15.2: Connections and Adapters](#)
- [79.15.3: Connecting Regulators](#)
- [79.15.4: Protecting Regulators](#)
- [79.16: Valves](#)
- [79.16.1: Opening Cylinder Valves](#)
- [79.16.2: Closing Valves](#)
- [79.16.3: Clogged Valves](#)
- [79.16.4: Torch Valves](#)
- [79.17: Hoses](#)
- [79.17.1: Hoses and Color Codes](#)
- [79.17.2: Hose Connections](#)
- [79.18: Torches](#)
- [79.18.1: Torch Precautions](#)
- [79.18.2: Lighters](#)
- [79.19: Use of Natural Gas](#)

Electrical Welding

- [79.20: Maintenance and Repair](#)
- [79.21: Cable Insulation](#)
- [79.22: Cable Connection](#)
- [79.23: Portable Welding Machines](#)
- [79.24: Grounding Electrical Arc Welding](#)
- [79.25: Protect from Electrical Shock and Moisture](#)
- [79.26: Electrodes](#)
- [79.27: Polarity Switch](#)
- [79.28: Thermit Welding](#)

Cutting, Welding or Heating

79.0: WELDING

CUTTING, WELDING OR HEATING

Rules in this chapter, if applicable, apply to both oxygen and fuel gas operations as well as electric welding.

[^Top](#)

79.1: Authorized Employees

Only authorized employees are permitted to use welding equipment. Welding, cutting and heating will be done only by or under the direct supervision of a qualified employee and comply with manufacturer's instructions.

[^Top](#)

79.2: Protective Equipment

[^Top](#)

79.2.1: Eye Precautions

All persons performing or observing cutting, welding or heating operations must wear proper eye protection and other personal protective equipment. They must not look at electric arc or oxyfuel flame unless properly protected and must warn others against looking at the arc or flames.

Refer to the following chart for minimum shade requirements of eye protection while cutting or welding.

Welding Operation	Shade No.
Shielded Metal — Arc Welding — Electrodes up to and including 5/32 inch diameter	10
Gas Tungsten — Arc Welding (non-ferrous) and Gas-shielded Arc Welding (non-ferrous) — Electrodes up to and including 5/32 inch diameter	11
Gas Tungsten — Arc Welding (ferrous) and Gas-shielded Arc Welding (ferrous) — Electrodes up to and including 5/32 inch diameter	12
Shielded Metal — Arc Welding: Electrodes 3/16 through 1/4 inch diameter	12
5/16 through 3/8 inch diameter	14
Carbon — Arc Gouging — For most application	12
Large diameter carbon electrodes	14
Soldering	2

Performing oxygen — fuel gas brazing — cutting — heating	5
Light Cutting up to 1 inch	4
Medium Cutting, 1 inch to 6 inches	5
Heavy Cutting, 6 inches and over	5 or 6
Gas Welding (light) up to 1/9 inch	5
Gas Welding (medium) 1/8 inch to 1/2 inch	5 or 6
Gas Welding (heavy) 1/2 inch and over	6 or 8

Cracked filter glasses (lens shade) must be replaced immediately. Shade number of filter plates are not additive. For example, a Number 6 and Number 8 filter do not have the same effective density as a Number 14 filter.

Note: See **Rule 71.5.2, Additional Eye Protection Requirements.**

[^Top](#)

79.2.2: Shielding

Welders must shield the welding arc from the view of others whenever possible.

[^Top](#)

79.2.3: Proper Clothing

When cutting, heating or welding wear hearing protection, high top boots, leather welding gloves or leather welding mittens and flame resistant clothing. When performing overhead electric arc or oxy/fuel operations wear, ~~as a minimum,~~ an approved full leather welding jacket.

Always wear flame resistant clothing. Flame resistant clothing should not be synthetic, synthetic blends such as nylon, rayon, polyester, etc. Clothing should protect the skin from infrared and ultraviolet radiation, as well as reduce the possibility of it catching fire or melting from hot sparks or hot slag.

Additional protective outerwear such as leather aprons, leather jackets, leather leggings, spats or sleeves shall be worn for overhead welding and for any other applications where clothing or body is in danger of being exposed to sparks or hot slag. Kevlar jacket or kevlar jacket with leather sleeves may be worn for lightweight cutting or welding and are not intended for

overhead welding.

Arms must be covered; tee shirts are not acceptable. All buttons on jackets must be buttoned. Sleeves and pockets must be secured against sparks or hot slag. Clothing must be free of oil or grease and trousers or overalls must be without cuffs.

Do not carry cigarette lighters or matches where they may be exposed to sparks or excessive heat.

System Special Instruction

79.2.3: Proper Clothing

Change rule to read:

When cutting, heating or welding wear hearing protection, high top boots, leather welding gloves or leather welding mittens and flame resistant clothing. When performing overhead electric arc or oxy/fuel operations wear an approved full leather welding jacket.

Always wear flame resistant clothing. Flame resistant clothing should not be synthetic, synthetic blends such as nylon, rayon, polyester, etc. Clothing should protect the skin from infrared and ultraviolet radiation, as well as reduce the possibility of it catching fire or melting from hot sparks or hot slag.

Additional protective outerwear such as leather aprons, leather leggings, spats or sleeves shall be worn for overhead welding and for any other applications where clothing or body is in danger of being exposed to sparks or hot slag.

Kevlar jacket or kevlar jacket with leather sleeves may be worn for lightweight cutting or welding and are not intended for overhead welding. Arms must be covered; tee shirts are not acceptable.

All buttons on jackets must be buttoned. Sleeves and pockets must be secured against sparks or hot slag. Clothing must be free of oil or grease and trousers or overalls must be without cuffs.

Do not carry cigarette lighters or matches where they may be exposed to sparks or excessive heat.

79.2.4: Cleaning Work Area

Do not use your hands, whether gloved or not, to brush slag or metal from material being welded or cut.

[^Top](#)

79.3: Fire Protection

Use shields or other protective devices to prevent setting fire to or damaging bridges, structures, or other material.

Fire extinguishers, fire hose or other suitable fire extinguishing equipment must be on hand during welding, cutting, and other open flame torch operations.

[^Top](#)

79.3.1: Protecting Area

Before leaving the work site, the person in charge must check to see that no fire or fire hazard exists and comply with their departmental fire prevention plan.

~~Before leaving the work site, the person in charge must check to see that no fire or fire hazard exists. If a potential fire hazard exists, the worker in charge must assign a watchman equipped with a fire extinguisher or ample water supply to stay in the area for a minimum of 2 hours after the last weld is completed.~~

General Order

Change rule to read:

Before leaving the work site, the person in charge must check to see that no fire or fire hazard exists and comply with their departmental fire prevention plan.

[^Top](#)

79.3.2: Welding, Heating or Cutting on Freight Cars

When welding, heating or cutting on freight cars (all types):

1. A thorough job briefing must be conducted before work is started to include what the car contains, or last contained if empty, and any special safety precautions needed to perform the required work.
2. Prior to working on a car, a fire extinguisher of the proper class must be in the immediate vicinity of the work.
3. Care must be taken to ensure lading or equipment is not damaged by the work.
4. Where repairs to the car include welding, heating or cutting and before leaving the worksite, it must be known that no fire exists. Re-check cars that have received welding or burning earlier in the shift. Make turnover to subsequent shifts of cars that have received welding, heating or cutting.
5. Welding, heating or cutting should be held to that which is necessary to meet the company, FRA and AAR criteria for safety and interchange ability.
6. If required, adequate ventilation and/or respiratory equipment must be provided.
7. When welding, heating or cutting on a loaded boxcar, the door must be open and interior of car continuously monitored until no threat of fire exists.
8. Ensure cars are set on their trucks at the close of work, whenever possible.
9. Cars that are subject to welding, heating or cutting should be placed at the end of the shop, when possible.
10. All cars that have had welding, heating or cutting and will stay under shop roof should have the doors closed.
11. Stop welding, heating or cutting 1/2 hour (30 minutes) before close of shift.
12. In the event of a freight car fire, if possible, without causing injury, car doors should be closed and car moved outside shop to be extinguished.
13. Extinguish fire only if injury can be prevented. Contact local emergency authorities, if necessary, to safely extinguish fires.

[^Top](#)

79.3.3: Welding, Cutting or Heating on Tank Cars

When making repairs to tank cars, other than maintenance of way water cars, follow precautions outlined in Rule 79.3.2, Welding, Heating or Cutting on Freight Cars. Also follow departmental policy, and other applicable policies, i.e., Confined Space Entry, Respiratory Protection, Hazard Communication Standard, etc. In addition, follow these procedures:

1. Determine car's contents, or if empty, it's last contents.
2. Consult the hazardous material information, or information available on precautions to be taken with the material involved. Comply with those instructions.
3. Prior to performing any repairs that require welding, cutting, or heating on a tank car that contains or last contained flammable gas, flammable liquid, flammable solid poison gas, chlorine, corrosives or explosives; the car will be inspected for physical signs of content leakage, and checked with a flammable gas detector. If leakage exists, follow

procedures outlined in your response plan and Rule 70.22, Chemical Spills. Leakage must be stopped before making repairs.

4. Repairs to the top dome areas or near the bottom outlet must be restricted to those necessary for safe movement only. Welding, Cutting and/or heating is not permitted in these areas. Welding or use of a cutting torch directly on either the inner or outer tank shell jacket is prohibited as well, unless departmental instructions make provisions for such work.
5. These instructions apply to tank cars that are in close proximity to welding or torch burning repairs being performed on other equipment.

[^Top](#)

79.4: Repairs or Alterations

Do not make repairs or alterations to cylinders, valves or torches. Defective regulators, torches or other equipment must not be used and must be returned to designated point for repair. Hose showing leaks, burns, worn places, evidence of damage from flashback or other defects must be replaced.

[^Top](#)

79.5: Equipment Condition

Inspect all equipment and know it is free of defects and in proper working condition.

Torch test must be conducted:

- prior to initial use each day or shift,
- when combination torches have been converted or altered,
- when the torch equipment has been dropped or is suspected of being damaged,
- when a flashback has occurred.

Torch test must be conducted in a well ventilated area with no ignition sources present.

Test will be conducted in accordance with departmental instruction.

[^Top](#)

79.6: Ventilation

Work in areas that have ventilation.

Exposure to lead, zinc or other welding fumes requires use of an approved respirator. Spray or dust respirators are not suitable and must not be used.

Note: ***Safety Resource Manual, Respiratory Protection Program, Section IV -E.***

[^Top](#)

79.7: Confined Spaces

When working in a building or in a confined space, place fuel-driven welding machines where exhaust fumes can be safely dissipated. Make certain that the exhaust fumes are not directed toward or into air intake parts on ventilation systems or air supplying equipment (e.g., compressors).

Note: See ***Rule 70.20, Confined Space Entry and Safety Resource Manual, Confined Space Entry Program, Section IV-G.***

[^Top](#)

79.7.1: Safety Precautions

Follow confined space entry procedures when working in tanks, vats, boilers, sewers, etc.

- Provide general mechanical or local exhaust ventilation before and during the welding operation.
- Use respiratory protection.
- Know emergency evacuation measures.
- Test the welding equipment for leaks before entering a confined space.
- Test the atmosphere inside the tank, vat, etc.
- Keep oxygen/fuel-gas cylinders outside the confined space.
- Remove oxygen/fuel gas equipment, or inert gas used for electrical welding, from confined space when not in use.

[^Top](#)

79.8: Hot Work

Do not weld, grind, rivet, solder, or cut on any new or used piston heads, hollow casting, or

containers such as drums, barrels, or tanks until the following conditions have been met:

1. Determine what the container last held. Thoroughly steam and wash out any container that held volatile or flammable materials.
2. Prior to grinding, heating, cutting or welding on any new or used container, trained personnel, using a Combustible Gas Indicator, will test the containers. The LEL must be <10% prior to and during any hot work activity.
3. After thoroughly cleaning, remove plugs or caps and further safeguard the container by filling it with water, if possible, before performing any welding, cutting, soldering or open flame work. In addition, if the container last held a gas or liquid which may not readily dissolve in water, an inert gas should be used to evacuate any flammable gas or vapors from the container. Ensure that the container has a vent or opening to allow heated air to escape.

Note: ***For procedures on inerting diesel fuel tanks, refer to Locomotive Maintenance Instructions (LMI) 2501.***

[^Top](#)

79.9: Use of Oxygen

Oxygen must not be used for compressed air as a source of pressure or to “dust” clothing.

[^Top](#)

79.10: Oil and Grease

Do not allow oil and grease to come in contact with oxygen.

- Keep hands, gloves, and clothes, as well as welding equipment, free of oil and grease to prevent fires.
- Do not allow oil and grease to touch regulators, valves or connections.

[^Top](#)

79.11: Hot Metal Precautions

When cutting, take precautions, such as barrier or spark guard, to prevent sparks, hot metal or severed sections from contacting cylinders, hose, cable or other flammable material. Do not lay object or material to be heated, cut or welded across a cylinder or on concrete.

[^Top](#)

79.12: Exposure to Excessive Heat

Do not allow cylinders to be exposed to sparks, hot slag, open flame and other sources of excessive heat.

[^Top](#)

79.13: Cutting Under Tension

When cutting twisted rail or other damaged steel sections, take precautions to prevent personnel from being struck by severed sections. Special equipment, such as burning bars, are available for this operation and should be used.

[^Top](#)

79.14: Cylinders

[^Top](#)

79.14.1: Storing Cylinders

When storing fuel gas and oxygen cylinders:

- Handle cylinders with extreme caution to avoid dropping and damaging valves.
- Separate oxygen cylinders from fuel gas cylinders. Maintain a minimum distance of 20 feet or place a barrier of noncombustible material that is at least 5 feet high and has a fire resistance rating of at least 1/2 hour between the oxygen and fuel gas cylinders.
- Store fuel gas or oxygen cylinders in upright positions on approved racks and properly secured. Keep valve ends up. Cylinders must be secured, whether they are being transported or put in storage. Store oxygen cylinders separate from fuel gas cylinders.
- Store cylinders in cool, well ventilated buildings away from elevators, stairs and passageways, when possible. Place them near exits for easy removal in case of fire.
- Store cylinders in the open when the cylinders can be protected against freezing or direct sunlight.
- Do not smoke or use matches or open-flame lights or torches in buildings where cylinders are stored. NO SMOKING and KEEP OPEN LIGHTS AND FIRES AWAY signs must be posted on all visible sides.

- When not in use, all outlet valves should be kept tightly closed, even though cylinders are considered empty. Valve caps must be kept in place.
- Fuel gas and oxygen cylinders, connections and appliances must be kept free from oils and greases. Do not handle cylinders with oily hands or gloves. Keep the cylinders away from combustible materials (e.g., oils, paints, shavings, and other flammable materials).

[^Top](#)

79.14.2: Working with Cylinders

When working with cylinders:

- Do not place cylinders where they may become part of an electrical circuit. Avoid placing cylinders near wires and electrical welding circuits.
- Do not strike an arc on or tap an electrode against a cylinder.
- Fuel gas and oxygen cylinders must be used in an upright position.
- Do not throw, drop or otherwise roughly handle cylinders.

Compressed gas cylinders shall be secured in an upright position at all times except, if necessary, for short periods of time while cylinders are actually being hoisted or carried.

Cylinders may be lifted by a crane, derrick or hoist only when a company-approved lifting device is used, and employees have been instructed on its use. Do not use an electric magnet to lift cylinders.

[^Top](#)

79.14.3: Transporting Cylinders

Remove gauges and regulators and apply caps before transporting oxygen or fuel gas cylinders, unless valves are covered by a DOT approved safety cap or device designed for that purpose. Caps need not be applied to complete a single series of welding operations.

When carrying oxygen cylinders in tool cars or in isolated compartments, make sure ventilation is provided.

[^Top](#)

79.14.4: Empty Cylinders

When cylinders become empty:

- Close the cylinder valve before disconnecting the hose. Valves must remain closed when cylinders are not in use.
- Cap empty cylinders when a cap is provided.
- Tear off the bottom half of the tag when provided (red on acetylene cylinders, green on oxygen cylinders).
- Separate empty cylinders from full cylinders.
- Promptly exchange empty cylinders at the supply point.

[^Top](#)

79.14.5: Leaking Cylinder

When a leaking cylinder is discovered, move it to an open area away from possible sources of ignition until the cylinder becomes empty.

Mark the cylinder, indicating the defect, so the supplier can take necessary corrective action.

[^Top](#)

79.14.6: Changing Cylinders

Before a regulator is removed from a cylinder valve, the cylinder valve must be closed and the gas released from the regulator. Drain both hoses, oxygen side first, in order to remove any possible gas mixture.

[^Top](#)

79.15: Regulators

[^Top](#)

79.15.1: Proper Regulator

Do not use a regulator with a gas not intended for that regulator.

Each oxygen/fuel gas station must have a shut off valve and be controlled with a pressure reducing regulator to obtain the recommended test pressures. Regulators must have operable

gauges. Regulators without gauges are not approved for service and provide no means to check pressures.

[^Top](#)

79.15.2: Connections and Adapters

Do not force connections. If the thread does not run easily, usually the wrong sized regulator is being applied. Use a standard adapter between the cylinder and the regulator if required. "Tee" or "Y" type connectors are not allowed.

[^Top](#)

79.15.3: Connecting Regulators

Before connecting regulators to cylinders, welders must crack the cylinder valve slightly to blow out any foreign matter. The valve should be opened approximately one-quarter of a turn and closed immediately.

Do not open a fuel gas valve near other welding work or near sparks, flame or other possible sources of ignition.

[^Top](#)

79.15.4: Protecting Regulators

Protect regulators when not in use by first closing cylinder valves, draining hoses at the torch, then releasing pressure on the diaphragm. Prevent a gas mixture from accumulating in the hose when either is being relieved of pressure by closing the valve of the other hose. This will prevent flashback which could damage the torch, hose or pressure regulator.

[^Top](#)

79.16: Valves

[^Top](#)

79.16.1: Opening Cylinder Valves

Pressure adjusting screws must be fully released before attaching regulator to cylinder. When opening a cylinder valve, stand to one side, away from the gauge faces and the front of the regulator. Wrenches or other tools which damage regulator connections must not be used. Where a special wrench is required, it must be left in position on the stem of the valve while the cylinder is in use, so that the fuel gas flow can be quickly turned off in case of emergency.

Return the cylinder to the vendor if oxygen valve cannot be opened by hand. Do not use hammer or wrench to open an oxygen cylinder valve.

Oxygen Cylinder Valve

Slowly open the oxygen cylinder valve until the high-pressure gauge indicates full pressure. Then fully open the valve.

Acetylene Cylinder Valve

Do not open an acetylene cylinder valve more than 1 and 1/2 turns. Leave the T wrench on the acetylene cylinder valve stem in case an emergency arises.

Do not use the recessed top of a cylinder as a receptacle for tools or other articles, since this might damage the safety plugs or interfere with closing the valve quickly.

[^Top](#)

79.16.2: Closing Valves

Valves of cylinders and stations on piped and manifold systems must be closed when not in use. When work is stopped or completed, or when the operator leaves the equipment, valves must be operated to relieve pressure on regulators and hoses.

[^Top](#)

79.16.3: Clogged Valves

If acetylene cylinder valves become clogged by ice or snow, use warm or medium hot water to thaw them. Do not use boiling water, since it may loosen fusible plugs. Do not use any type of flame to thaw acetylene cylinder valves.

[^Top](#)

79.16.4: Torch Valves

Make sure torch valves are open when changing or adjusting pressure on regulators. Do not exceed pressure authorized for welding or cutting.

[^Top](#)

79.17: Hoses

When using oxy-fuel equipment, use only equipment designed for the particular fuel gas being used. When not in use, oxygen and fuel gas hoses must be properly stored to prevent damage.

[^Top](#)

79.17.1: Hoses and Color Codes

Oxygen-fuel gas hoses must be inspected prior to each use. Hose(s) showing leaks, worn places or other defects must be repaired or replaced.

Long lengths of hose are not desirable. When long lengths are necessary, all connections must be tight and hose must be protected from being stepped on, run over, kinked or tangled.

When lengths of oxygen and acetylene hose are taped together for convenience and to prevent tangling, not more than 4 inches out of 12 inches shall be covered by tape.

Use T-Grade welding hose for welding. Where possible, 3/8 inch hose will be used to reduce pressure drop. Color codes for hose are:

	Red -----	Combustible gases
	Green --	Oxygen

Hose must be used only with the gases for which it is intended. Do not interchange hose or use it for other purposes.

[^Top](#)

79.17.2: Hose Connections

Blow out new hose, with gas for which the hose will be used, to remove talc. In making up hose connections, only crimp ferrules will be used and no more than two splices will be used for any length hose. Tape or wire will not be used to repair hose. Approved reverse flow devices must be used. Quick disconnect may be used and must be positive locking and approved for oxy-fuel use only.

[^Top](#)

79.18: Torches

Torches must be maintained in good condition and carefully handled. Use proper torch and tips designed for the fuel gas (Acetylene, Natural Gas, MAPP, Propylene). A lighted torch must not be laid down, passed from one person to another, or kept in your hand when climbing. When not in use, valves must be closed and torch stored in a safe place.

[^Top](#)

79.18.1: Torch Precautions

When working with torches:

- Make sure that the gas stream is not directed toward yourself or others.
- Keep the flame and sparks directed away from personnel, flammables, and equipment.
- Torch should be momentarily purged prior to lighting to ensure flow of oxygen and fuel gas.

Do not use the torch as a hammer.

[^Top](#)

79.18.2: Lighters

Use a standard friction lighter to ignite all oxygen fuel gas equipment or fuel gas equipment. Do not use matches or other means to ignite a blow pipe.

[^Top](#)

79.19: Use of Natural Gas

When heating with natural gas, welders may use a regular welding torch with natural gas heating heads. Do not use natural gas for welding.

[^Top](#)

Electrical Welding

79.20: Maintenance and Repair

Only a qualified mechanic or electrician may make repairs or adjustments to electrical welding equipment.

EXCEPTION: Welders may make routine operating adjustments.

[^Top](#)

79.21: Cable Insulation

Make sure electrode and ground cables are completely insulated throughout their entire length. Do not allow the welding cable to contact or be pulled through pools of water or dip the electrode holder into water for cooling.

[^Top](#)

79.22: Cable Connection

Use approved cable connections with insulated covering. Cables must be in continuous lengths without splices or taps.

Use correct cable size. Sustained overloading will cause cable failure and result in possible electrical shock or fire hazard. Ground cable should be the same rating as the electrode cable.

When repairing cables or cable ends, disconnect the cable at the first joint. Coil the cable to ensure that it cannot be reconnected while repairs are in progress.

[^Top](#)

79.23: Portable Welding Machines

Power supply cables to portable welding machines must include a conductor (colored green) for grounding protection. One end of this conductor must be connected to the machine frame. The supply end must be connected to a suitable grounding connection (e.g., underground piping system or a copper-coated ground rod).

Set the disconnect switch to the OFF position before plugging or unplugging welding machines.

[^Top](#)

79.24: Grounding Electrical Arc Welding

When performing electrical arc welding on machinery or equipment of any kind, apply the ground cable to the particular part or piece of machinery or equipment being welded and as near as possible to the point being welded.

Note: Ground cable clamps must provide good mechanical and electrical contacts with enough carrying capacity to handle welding current without undue heating.

Do not permanently bond the welding ground lead to any rail, building steel, or other structure.

Fixed electrical welding equipment must be permanently grounded on the service side to the ground system.

[^Top](#)

79.25: Protect from Electrical Shock and Moisture

Protect yourself from possible dangerous electrical shock. The electrode and work (or ground) circuits are electrically "hot" when the welder is on.

- Do not permit contact between "hot" parts of the circuits and bare skin or wet clothing.
- Do not simultaneously touch electrically "hot" parts of electrode holders connected to 2 welders because voltage between the two can be the total of the open circuit voltage of both welders.
- Wear dry, hole-free, approved welding gloves to insulate hands.
- Insulate yourself from the work and ground by using dry insulation.
- When welding in damp locations, on metal floors, grating or scaffolds, and when in positions (such as sitting or lying), make certain the insulation is large enough to cover your full area of physical contact with the work and ground.
- Maintain the electrode holder, work clamp, welding cable and welding machine in good, safe operating condition.

- When using the welding machine as a power source for mechanized welding, the above precautions also apply for the welding wire, wire reel, welding head or nozzle.
- When working above floor level, protect yourself from a fall should you be shocked.
- Do not loop or coil electrode cables around the body.
- During inclement weather, electrical welding equipment must be properly protected from moisture. Electric welding machines that have become wet, must be thoroughly dried and tested before being used.

[^Top](#)

79.26: Electrodes

When not welding, make certain no part of the electrode circuit is touching the work or ground. Accidental contact can cause overheating and create a fire hazard.

Electrodes must be removed from their holders when not in use. Holders shall be so placed or protected that they cannot make electrical contact with employees or conducting objects.

Electrodes must be stored where they can be kept free of moisture.

[^Top](#)

79.27: Polarity Switch

Because of the danger of arcing and damage to the polarity switch, setting of the polarity switch on a welding machine must not be changed while it is operating under welding current load.

[^Top](#)

79.28: Thermit Welding

Only authorized employees are permitted to perform thermit welding. During the thermit welding process:

- Wear goggles and face shield while making the pour. One form of eye protection must have a number 5 lens or greater. Any employee within 15 feet of the weld being poured must wear a face shield with safety glasses at all times.
- Dust goggles or face shield with safety glasses must be worn when removing the mold and cleaning the weld.

- Do not dump hot slag on wet soil, snow or throw in water.
- Waste slag must be properly disposed of by burying.

[^Top](#)

Updated: 8/09/2010

80.0: WALKING/WORKING SURFACES

- [80.1: Avoiding Slips, Trips and Falls](#)
- [80.2: Precautions Against Slips, Trips, and Falls](#)
- [80.3: Stairs](#)
- [80.4: Look Both Directions](#)
- [80.5: Jumping](#)
- [80.6: Working at Night or Low Light Level](#)
- [80.7: Conveyors](#)
- [80.8: Safe Distance from Edge](#)
- [80.9: Turntables](#)
- [80.10: Overhead Hazards](#)
- [80.11: Approved Ladders](#)
- [80.12: Inspection](#)
- [80.13: Storage](#)
- [80.14: Placement](#)
- [80.15: Extension Ladders](#)
- [80.16: Metal Ladders](#)
- [80.17: Ascending or Descending](#)
- [80.18: Near Doors and Aisles](#)
- [80.19: Climbing with Tools/Material](#)
- [80.20: Step Ladders](#)
- [80.21: Platforms](#)
- [80.22: Sectional Scaffolding](#)
- [80.23: Fall Protection](#)

80.1: Avoiding Slips, Trips and Falls

Observe safety practices that eliminate slips, trips and falls.

- Perform your work to avoid creating hazards.
- Maintain good housekeeping.
- Clean up spills.
- Erect barricades, signs, or cones where appropriate.

Avoid objects, obstructions, holes and openings and be alert to underfoot conditions. Aisles, stairways and walkways must be kept free of tools, trucks, materials, equipment and obstructions.

[^Top](#)

80.2: Precautions Against Slips, Trips, and Falls

Take precautions to avoid slipping on:

- Slick surfaces such as recently washed, waxed floors, oil, grease or soap on the walkway.
- Snow, ice, wet spots or other hazards caused by inclement weather. Use appropriate footwear and accessories and/or spread sand/salt mixture (as appropriate) on ice before proceeding when icy conditions exist.

When walking keep your eyes on the pathway and if hazardous under foot conditions exist:

- Keep your hands out of pockets for balance.
- Take short, deliberate steps with toes pointed outward.
- When stepping over objects, such as rails, be sure your front foot is flat before moving your rear foot.

Employees are prohibited from running except when necessary to prevent injury to themselves or others.

[^Top](#)

80.3: Stairs

Do not run up or down stairs, through halls or passageways, or around corners. Do not ascend or descend stairways with hands in pockets and use the handrail where provided.

[^Top](#)

80.4: Look Both Directions

Look in both directions and know the way is clear when walking out of doorways or going around corners or obstructions.

[^Top](#)

80.5: Jumping

Do not jump from equipment or structures such as docks, trucks, rail cars, platforms, etc. or across ditches, pits, manholes or other openings.

[^Top](#)

80.6: Working at Night or Low Light Level

Carry a light, or use additional lighting, when working at night or where there is a low or inadequate level of lighting.

Exercise care to avoid hazards caused by shadows resulting from the use of lights.

Lighting requirements for use in:

- Through freight, local or road switcher service:
 - Trainmen - Lantern
 - Engineer - Flashlight or LanternTrainmen and Engineers may use a hands free light in addition to required lighting.
- Remote Control Operator:
 - Hands free light
 - Lantern may be used if hands free light fails or as an auxiliary light.

General Order

80.6 Working at Night or Low Light Level

Add new last paragraph reading:

Lighting requirements for use in:

- Through freight, local or road switcher service:
 - Trainmen - Lantern
 - Engineer - Flashlight or LanternTrainmen and Engineers may use a hands free light in addition to required lighting.
- Remote Control Operator:
 - Hands free light
 - Lantern may be used if hands free light fails or as an auxiliary light.

[^Top](#)

80.7: Conveyors

Do not ride on or step across conveyors.

[^Top](#)

80.8: Safe Distance from Edge

Keep a safe distance from the edge of pits, turntables, platforms or trenches. Exercise caution when working on or near steep slopes.

[^Top](#)

80.9: Turntables

Do not get on or off moving turntables or transfer tables.

[^Top](#)

80.10: Overhead Hazards

Avoid overhead hazards and do not work, walk or stand under workmen (ladders, platforms or scaffolds) from which objects could fall. If required to work under overhead hazards, wear the proper protective equipment (e.g., hard hats).

[^Top](#)

80.11: Approved Ladders

Use only single person ladders which are rated 1A or 1AA or that have been approved by the Safety Department. Standing on boxes, barrels, chairs or other improvised supports is prohibited. Only equipment approved for this purpose may be used. Stepladders that are two sided and can accommodate two people at one time must have a minimum total capacity rating of 500 pounds.

Ladders or specially designed platforms are required to service, maintain or repair elevated

locations on locomotives. Do not stand on locomotive handrails.

[^Top](#)

80.12: Inspection

Before a ladder, scaffold, platform or elevated board is used, check to ensure that it is securely placed and capable of supporting the load. Before using a ladder, inspect it for broken or missing steps, rungs, cleats, broken side rails or other defects. Do not use a defective ladder. Defective ladders must be removed from service and tagged, "OUT OF SERVICE."

Before using a portable ladder, inspect it for defects and ensure that it is equipped with spikes or non-slip feet suitable for the surface on which it will be used.

Portable ladders that are used in areas where they could contact exposed energized parts must have nonconductive side rails.

Wooden ladders must not be painted.

[^Top](#)


80.13: Storage

Ladders and portable steps must be properly stored.

[^Top](#)

80.14: Placement

Place a straight ladder so that the horizontal distance from the base to the vertical plane of the support is approximately one-fourth the ladder length between the supports. When it is required to exit the top of the ladder, the ladder side rails must extend at least three feet above the top landing, eaves, gutter or roof. Place ladder legs on firm footing and secure against movement. Do not lean a ladder against an unstable object or place on a box, barrel, block or other unstable base for additional height. Ladders must be secured to prevent movement. Do not use a ladder in a horizontal position as a runway or scaffold.

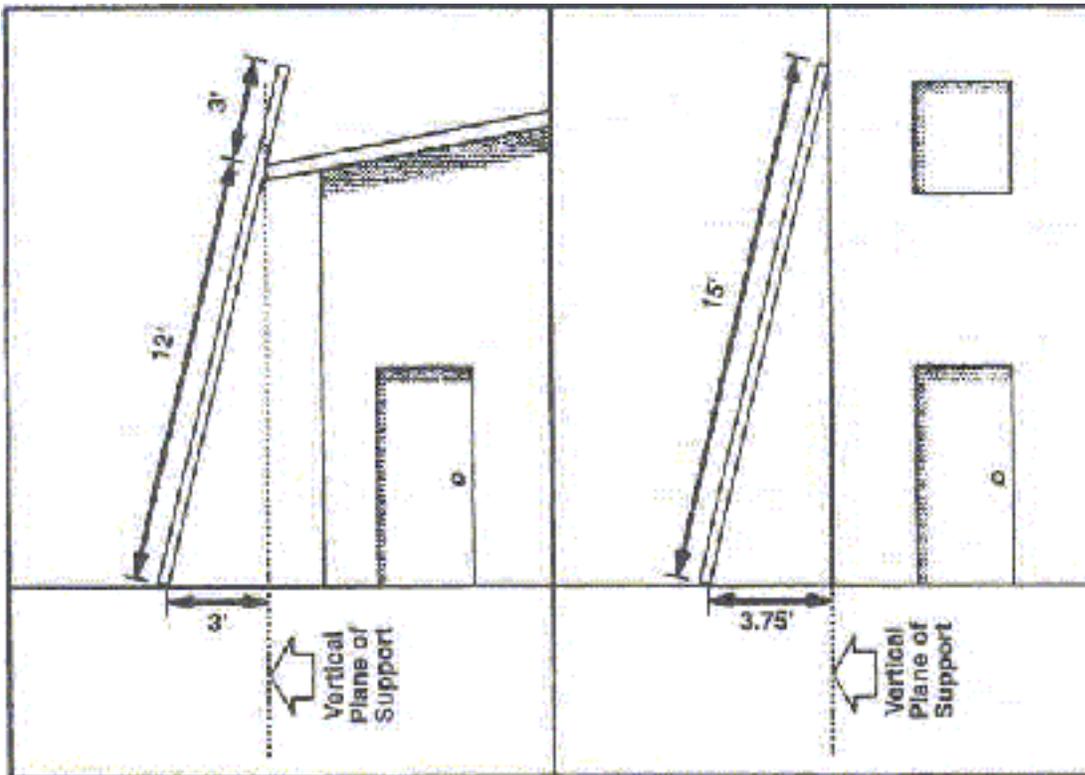

[^Top](#)

80.15: Extension Ladders

Assemble and carefully raise to ensure that guides and hooks are properly engaged. Use the ladder's rope to raise and lower the extension and keep hands and fingers clear of the moving portion.

[^Top](#)

80.16: Metal Ladders

Do not use metal ladders or scaffolds when working on or near energized electrical wires.

[^Top](#)

80.17: Ascending or Descending

Face ladder and use both hands when ascending or descending maintaining a three point contact. Only one person may be on a ladder at a time, unless it is designed for more than one person.

[^Top](#)

80.18: Near Doors and Aisles

Ladders used near a door, aisle, pathway or roadway must be secured or guarded.

[^Top](#)

80.19: Climbing with Tools/Material

Do not climb ladders with tools or materials in your hands; tools may be carried in an approved tool belt or a hand line must be used. Tools or materials must not be placed on a scaffold or platform in such a manner that they may fall or be knocked off.

[^Top](#)

80.20: Step Ladders

A step ladder must not be used unless it is fully opened and the spreaders properly set. Step ladders more than 10 feet high must not be used unless held and steadied by another individual. Standing on the top step, platform or those parts of the ladder labeled "NO STEP" is prohibited.

[^Top](#)

80.21: Platforms

Platforms more than 6 feet above the ground or floor in construction operations or 4 feet in General Industry operations must have:

- guard rails with a nominal height of 42 inches.
- mid-rail at one-half the height distance of the top rail
- toe board of 4 inches nominal height on all open sides and ends.

Exception: In California the above applies to platforms 30 inches or more above the ground or floor.

[^Top](#)

80.22: Sectional Scaffolding

Sectional scaffolding must be erected in accordance with the manufacturer's instructions. Where such scaffolding is equipped with wheels for support, they must be equipped with wheel locks and locked before work is performed. Outriggers and toe boards, where provided, must be in working condition and protected from damage. Scaffolding legs must be placed on firm footing and secured against movement.

[^Top](#)

80.23: Fall Protection

Do not work on bridges, elevated structures or the roofs of cars and locomotives without proper authority. Comply with appropriate departmental instructions and the Fall Protection Policy.

Note: See ***Rule 1.21, Occupying Roof; and Safety Resource Manual, Fall Protection Policy, Section IV-J.***

[^Top](#)

Updated: 4/29/2011

Union Pacific Rules

Safety Rules

81.0: WORKING AROUND TRACKS OR BEING ON EQUIPMENT

- [81.1: Precautions Around Tracks and Moving Equipment](#)
- [81.1.1: Walking On or Near Tracks](#)
- [81.1.2: Precautions near Passing Trains or Equipment](#)
- [81.1.3: Signals for Movement](#)
- [81.2: Crossing Tracks](#)
- [81.2.1: Walking Near or Crossing Track](#)
- [81.2.2: Sufficient Distance](#)
- [81.3: Safety Appliances](#)
- [81.4: Getting On or Off Equipment](#)
- [81.4.1: Standing Equipment](#)
- [81.4.2: Moving Equipment](#)
- [81.4.3: Loading and Unloading Luggage and Material](#)
- [81.5: Crossing Through or Fouling Equipment](#)
- [81.5.1: Crossing Through Standing Equipment](#)
- [81.5.2: Stepping from One Car to Another](#)
- [81.5.3: Moving Cars](#)
- [81.5.4: Understanding Between Crew Members Before Crossing Through or Fouling Equipment](#)
- [81.5.5: Trainline Power Cables](#)
- [81.6: Placing Feet](#)
- [81.7: Riding Equipment](#)
- [81.7.1: Designated Riding Places](#)
- [81.7.2: Unexpected Movement](#)
- [81.7.3: Shifting Lading](#)
- [81.7.4: Riding Flat Cars or Intermodal Cars](#)
- [81.7.4.1: Riding Bulkhead Flat Cars and Centerbeam Flat Cars](#)
- [81.7.5: Riding Tank Cars](#)
- [81.7.6: Business Cars or Passenger Equipment](#)
- [81.7.7: Riding Locomotive Cranes and Work Equipment](#)
- [81.8: Close Clearances](#)

- [81.8.1: Avoiding Fouling Hazards](#)
- [81.8.2: Maintain Lookout](#)
- [81.8.3: Impaired Clearances](#)
- [81.9: Cars in Motion](#)
- [81.10: Moving Equipment in Locomotive, Car, or Maintenance of Way Repair Facilities](#)
- [81.10.1: Using Mobile Equipment](#)
- [81.10.2: Using Locomotive](#)
- [81.10.3: One Person Operations](#)
- [81.11: Hand Brake](#)
- [81.11.1: Releasing Hand Brake](#)
- [81.11.2: Difficult or Defective Hand Brake](#)
- [81.11.3: Brake Sticks](#)
- [81.12: Wheel Chocks](#)
- [81.13: Coupling and Uncoupling](#)
- [81.13.1: Going between Cars](#)
- [81.13.2: Coupler and End Sill](#)
- [81.13.3: Coupler Adjustment](#)
- [81.13.4: Using a Knuckle-Mate](#)
- [81.13.5: Using a Coupler Alignment Strap](#)
- [81.13.6: Replacing Knuckles](#)
- [81.13.7: Opening Angle Cock](#)
- [81.13.8: Coupling and Uncoupling Hoses](#)
- [81.14: Dump Cars](#)
- [81.15: Car Doors](#)
- [81.16: Load Dividers](#)
- [81.17: Cars Being Loaded or Unloaded](#)
- [81.18: Loading Roadway Equipment](#)
- [81.19: Air Brake Rigging](#)
- [81.20: Moving In and Out of Equipment or On Equipment](#)
- [81.21: Locomotives, Working On or About](#)
- [81.21.1: General Requirements](#)
- [81.21.2: Restrictions](#)
- [81.21.3: Locomotive Cab Floor](#)
- [81.22: Securing Supply Apparatus](#)
- [81.23: Lockout Protection Required](#)

81.1: Precautions Around Tracks and Moving Equipment

[^Top](#)

81.1.1: Walking On or Near Tracks

Do not stand or sit on, walk fouling of or walk between rails of a track unless required by assigned duties.

When standing, walking, or working between or near tracks, keep a careful lookout in both directions for trains, locomotives, cars or other moving equipment and expect movement at any time, on any track, in either direction. Do not rely on hearing the approach of a train or equipment.

Foremen or others in charge of employees working on or about the tracks must require the employees to be alert and watchful and to keep out of danger.

[^Top](#)

81.1.2: Precautions near Passing Trains or Equipment

When near passing trains or equipment:

- Move away from the track to avoid being struck by car doors, protruding or falling articles.
- Stand clear of all tracks when trains are approaching or passing in either direction. Do not stand on one track while trains are passing on an adjacent track. However, engineering department employees are governed by Chief Engineer Instruction Bulletins and other MofW rules when working on adjacent tracks.
- Do not allow yourself or others to be next to or between equipment while a train or equipment is closely passing on the adjacent track.
- Do not rely on others to notify you of an approaching train, engine or other equipment unless that person's duties include providing warnings.

System Special Instruction

Change second bullet to read:

- Stand clear of all tracks when trains are approaching or passing in either direction. Do not stand on one track while trains are passing on an adjacent track. However, engineering department employees are governed by Chief Engineer Instruction Bulletins and other MofW rules when working on adjacent tracks.

[^Top](#)

81.1.3: Signals for Movement

After giving a signal to stop the movement, keep clear until the equipment has stopped. Do not give a signal to move engines or cars if anyone is foul of your movement.

[^Top](#)

81.2: Crossing Tracks

[^Top](#)

81.2.1: Walking Near or Crossing Track

Before fouling or crossing tracks:

- Ensure no movement is closely approaching.
- Look in both directions.
- Look for conditions that could interfere with footing.

When walking near or crossing tracks:

- Walk straight across tracks.
- Avoid conditions that could interfere with footing.
- Step over rails, frogs, switches, guardrails, etc.

~~When walking near or crossing tracks, step over, not on:~~

- rails,
- frogs,
- switches,
- guardrails, etc.

~~Walk straight across tracks when possible. Watch for conditions that could interfere with footing.~~

System Special Instruction

Change title and rule to read:

81.2.1: Walking Near or Crossing Track

Before fouling or crossing tracks:

- Ensure no movement is closely approaching.
- Look in both directions.
- Look for conditions that could interfere with footing.

When walking near or crossing tracks:

- Walk straight across tracks.
- Avoid conditions that could interfere with footing.
- Step over rails, frogs, switches, guardrails, etc.

[^Top](#)

81.2.2: Sufficient Distance

Unless otherwise authorized, when crossing/stepping foul of tracks, employees must not:

- cross or step foul of tracks closely in front of or behind moving equipment,
- go between standing equipment if the opening is less than 50 100 feet,
- cross tracks unless there is at least 20 feet between the employee and the equipment.

Unless otherwise authorized, employees must separate equipment at least 100 feet when it is necessary to separate equipment to make adjustments or open a knuckle by hand.

- ~~separate equipment at least 50 feet before opening a knuckle by hand,~~
- ~~separate the equipment at least 100 feet when it is necessary to separate equipment to make other adjustments.~~

Employees may go between or around the equipment in less than the specified distance provided the equipment is protected by Rule 5.13, ~~Rule 81.5.4~~, 81.23 or 83.1.3 and the employee knows that no movement will be made. Employees may go around the end of equipment in less than 20 feet when the equipment is protected by Rule 81.5.4 and the employee knows that no movement will be made.

Whenever employees go around the end of equipment, they must provide sufficient distance to avoid injury in case of movement from cars with moveable center sills.

System Special Instruction

81.2.2 Sufficient Distance

Change rule to read:

Unless otherwise authorized, when crossing/stepping foul of tracks, employees must not:

- cross or step foul of tracks closely in front of or behind moving equipment,
- go between standing equipment if the opening is less than 100 feet,
- cross tracks unless there is at least 20 feet between the employee and the equipment.

Unless otherwise authorized, employees must separate equipment at least 100 feet when it is necessary to separate equipment to make adjustments or open a knuckle by hand.

Employees may go between or around the equipment in less than the specified distance provided the equipment is protected by Rule 5.13, 81.23 or 83.1.3 and the employee knows that no movement will be made. Employees may go around the end of equipment in less than 20 feet when the equipment is protected by Rule 81.5.4 and the employee knows that no movement will be made.

Whenever employees go around the end of equipment, they must provide sufficient distance to avoid injury in case of movement from cars with moveable center sills.

[^Top](#)

81.3: Safety Appliances

Visually inspect safety appliances on equipment for defects such as loose, damaged or missing hand holds, ladders, grab irons, sill steps or crossover platforms.

Do not use defective safety appliances. Warn others and report the defect to the yardmaster, train dispatcher or supervisor.

Do not attempt to mount equipment not equipped with safety devices.

[^Top](#)

81.4: Getting On or Off Equipment

Do not get on or off cars and engines except when required in the performance of duty, and only when it can be done safely.

81.4.1: Standing Equipment

The following precautions must be taken when getting on or off standing equipment:

- Always use the provided appliances (steps, ladders and hand holds) for getting on and off equipment. Be aware of and take necessary precautions to prevent injury from the build up of snow, ice, water, mud, grease and oil on footwear, sill steps and side ladders.
- Keep hands free of all objects that may hinder a secure handhold. Always maintain a secure grip on the handholds on engine platforms or while using appliances on the equipment. Be prepared for sudden movement.
- Face the equipment and use the side ladder or steps, maintaining a three-point contact (two feet and one hand or two hands and one foot). Feet must be securely placed.
- When getting off, retain a grip on the hand hold until both feet are firmly placed on the ground or other support.
- Observe surface conditions and activity in the area before getting off. Guard against injury by looking out for unsafe footing, obstructions or equipment moving on other tracks.
- When practical, get on or off equipment on the side away from main tracks or close clearances.
- Use extreme care during wet, muddy, snowy or icy conditions and at night in unlit areas.

81.4.2: Moving Equipment

Employees are prohibited from getting on or off moving equipment unless necessary to prevent injury to themselves or others.

If necessary to get on or off, the following precautions must also be taken:

- When getting on, stand clear of equipment so as not to be struck. When boarding boxcars or similar equipment, grasp the leading grab iron with leading hand in direction of movement, then step up with the trailing foot as you grasp trailing grab iron, putting trailing foot in trailing corner of step letting movement lift you off the ground.
- When getting off moving equipment, do not step between the rails, on tie ends or immediately ahead of switches. When getting off, make sure you are clear of the engine or car. The trailing foot (foot opposite from the direction of movement) must

strike the ground first, directing you away from the equipment.

[^Top](#)

81.4.3: Loading and Unloading Luggage and Material

Do not throw or "swing" luggage or material onto a locomotive from the ground. Load or unload luggage, grips without straps, ice chests, and other objects onto locomotives and cabooses before you get on or off. Load or unload from the side of the locomotive, not the front.

Maintain firm footing and use proper body mechanics / lifting techniques and, if necessary, pass the item to your co-worker. Board or detrain carrying grips with shoulder straps on your shoulder and maintain both three-point contact and your balance.

[^Top](#)

81.5: Crossing Through or Fouling Equipment

Do not get on, cross through, crawl, sit or lie under cars, unless duties require. When duties require, assure that all movement has stopped, protection has been provided and no unexpected movement will occur.

Unless otherwise authorized, before an employee steps foul of a track to work on or make adjustments to equipment, the employee must notify, if applicable:

- all crew members,
- the yardmaster,
- crew members of other engines working in the yard.

When applicable, Rule 81.5.4, Understanding between Crew Members Before Crossing Through or Fouling Equipment, will apply.

[^Top](#)

81.5.1: Crossing Through Standing Equipment

When duties require crossing through a standing train or cut of cars, proper protection against movement must be provided. The following applies:

- Choose equipment carefully, using only cars with ends equipped with a crossover platform and hand holds.
- Keep hands free of objects that may hinder a secure handhold.
- Be prepared for unexpected movement, maintaining a three-point contact (two feet and one hand or both hands and one foot) while walking across the end of the car.
- On equipment where crossover platforms and hand holds are not available, use end of car structural bracing to maintain three point contact, if safe to do so. If no structural bracing is available, do not cross through. However, a train or cut of cars made up of intermodal cars equipped with crossover platforms without handholds may be crossed through without three-point contact; taking short, deliberate steps.

[^Top](#)

81.5.2: Stepping from One Car to Another

Stepping from one car to another is permitted only if equipment is standing, it can be done safely and proper protection against movement has been provided.

[^Top](#)

81.5.3: Moving Cars

Do not cross under, over or through or ride between moving cars.

Some maintenance activities require movement from car to car. Equipment must be designed for such movement. Such activities include:

- rail loading and unloading,
- rail grinding,
- car top material handling,
- loading and unloading wheeled equipment from flatcars.

[^Top](#)

81.5.4: Understanding Between Crew Members Before Crossing Through or Fouling Equipment

Red Zone:

Anytime a Train, Engine or Yard employee is working within an area where there is the potential to be struck by moving equipment, crossing through equipment and/or fouling

equipment.

Establishing Red Zone

Employee(s) working in red zones must comply with the following 4-Step Process:

1. Request Red Zone
2. Determine Action Required
3. Confirm Red Zone
4. Release Red Zone

Exceptions

Operating the uncoupling lever.

Primary RCO opens knuckles during humping or kicking cars (movement must be stopped).

Rule 5.13 is in effect.

Crew Preparation Prior to Establishing Red Zone

Wait for movement to stop and slack to adjust.

Ascertain that all crew members have a clear understanding of the track(s) to be fouled.

Determine if other engine(s) have access to tracks where protection is required.

4-Step Process:

<u>Step</u>	<u>Who</u>	<u>Action</u>	<u>Acknowledgment</u>
<u>Step 1.</u> <u>Request Red Zone</u>	<u>Employee requesting Red Zone</u>	<u>1. Notify all applicable crew members and jobs that have access to the track to be fouled.</u> <u>2. Request "Red Zone" identifying the track or tracks to be fouled.</u>	<u>"Requesting Red Zone" or Approved Hand Signal</u>

<p>Step 2. Determine Action Required</p>	<p><u>Crew Members</u></p>	<p>Select option(s) to prevent movement on or into track for any job with direct access to the affected track: Option 1 - Movement (s) stopped and "Set and Centered". Option 2 - Line switch away from track to be fouled. (UPRR property only)</p>	<p><u>Job Briefing</u></p>
<p>Step 3. Confirm Red Zone</p>	<p><u>Engineer or employee at the controls</u></p>	<p>Option 1: Movement Stopped and Set and Centered 1. Apply independent brakes, train airbrake must be applied when necessary. 2. Center the reverser. 3. Acknowledge understanding. 4. Locomotive brakes are to remain applied and reverser centered. 5. Locomotive is not to be left unattended until the crew member requesting protection gives prescribed hand signal or announces by radio, "Clear of the Red Zone."</p>	<p><u>"Set and Centered"</u> <u>or</u> <u>5.8.2(4)</u></p>

	<u>Employee(s) of affected jobs</u>	<u>Option 2:</u> <u>Line switch away from track to be fouled</u> <u>1. Acknowledge understanding.</u> <u>2. Repeat the track(s) to be fouled.</u> <u>3. Line switches to prevent access into the track where protection is required and confirm to employee requesting "Red Zone".</u>	<u>Line switch away from track to be fouled and confirm with employee requesting Red Zone</u>
<u>Step 4. Release Red Zone</u>	<u>Employee that requested Red Zone</u>	<u>When physically clear of Red Zone, notify all applicable crew members and jobs.</u>	<u>"Clear of Red Zone"</u> <u>or</u> <u>Approved Hand Signal</u>

Acknowledgement via Hand Signals

Prior to entering a Red Zone, a job briefing must be conducted informing all crew members that hand signals will be used to initiate and release a Red Zone using the following signals:

Prescribed Hand Signals:

Entering the Red Zone

Hand or lantern will be moved in a horizontal motion back and forth across the chest.

Prior to entering the Red Zone

Engineer must acknowledge by using whistle signal 5.8.2(4) or verbal confirmation that brakes are applied and reverser is centered.

Clear of the Red Zone

Hand or lantern will be held at arm's length above the head. Engineer must acknowledge

verbally or whistle signal 5.8.2 (4).

~~Before an employee steps foul of a track to work on or make adjustments to equipment or cross through cars, when the equipment is coupled to an occupied engine, active remote control engine or other motive equipment or if occupied engine is on the same track, the following applies:~~

- ~~• The employee must notify all crew members. However, notification is not required when the primary RCO opens knuckles during switching operations. Notification may be verbal between the employees, agreed-upon hand signal, or radio communication.~~
- ~~• The engineer must apply locomotive air brakes and center the reverser. Train air brakes must be applied when necessary. The engineer will then notify the employee the engine is "set and centered". If the equipment is not equipped with a reverser, it must be placed in neutral or park with the brakes applied. The engine must not be left unattended until the employee reports clear.~~
- ~~• When remote control operations are being used, the primary RCO must position the transmitter's speed control to Stop, the direction control to neutral, apply the locomotive air brakes and when necessary, apply the train air brakes. When an employee, other than the primary RCO, will foul the track, the primary RCO will notify the employee that the transmitter is "set and centered".~~
- ~~• When employee is clear of the track, the employee will notify all crew members they are clear of the track. Engine settings or transmitter settings must not be changed until acknowledgement is complete between employee controlling the engine and employee reporting clear of the track.~~

General Order

Change entire rule to read:

Red Zone:

Anytime a Train, Engine or Yard employee is working within an area where there is the potential to be struck by moving equipment, crossing through equipment and/or fouling equipment.

Establishing Red Zone

Employee(s) working in red zones must comply with the following 4-Step Process:

1. Request Red Zone
2. Determine Action Required
3. Confirm Red Zone

4. Release Red Zone

Exceptions

Operating the uncoupling lever.

Primary RCO opens knuckles during humping or kicking cars (movement must be stopped).

Rule 5.13 is in effect.

Crew Preparation Prior to Establishing Red Zone

Wait for movement to stop and slack to adjust.

Ascertain that all crew members have a clear understanding of the track(s) to be fouled.

Determine if other engine(s) have access to tracks where protection is required.

4-Step Process:

Step	Who	Action	Acknowledgment
Step 1. Request Red Zone	Employee requesting Red Zone	1. Notify all applicable crew members and jobs that have access to the track to be fouled. 2. Request "Red Zone" identifying the track or tracks to be fouled.	"Requesting Red Zone" or Approved Hand Signal
Step 2. Determine Action Required	Crew Members	Select option(s) to prevent movement on or into track for any job with direct access to the affected track: Option 1 - Movement (s) stopped and "Set and Centered". Option 2 - Line switch away from track to be fouled. (UPRR property only)	Job Briefing

<p>Step 3. Confirm Red Zone</p>	<p>Engineer or employee at the controls</p>	<p>Option 1: Movement Stopped and Set and Centered 1. Apply independent brakes, train airbrake must be applied when necessary. 2. Center the reverser. 3. Acknowledge understanding. 4. Locomotive brakes are to remain applied and reverser centered. 5. Locomotive is not to be left unattended until the crew member requesting protection gives prescribed hand signal or announces by radio, "Clear of the Red Zone."</p>	<p>"Set and Centered" or 5.8.2(4)</p>
	<p>Employee(s) of affected jobs</p>	<p>Option 2: Line switch away from track to be fouled 1. Acknowledge understanding. 2. Repeat the track(s) to be fouled. 3. Line switches to prevent access into the track where protection is required and confirm to employee requesting "Red Zone".</p>	<p>Line switch away from track to be fouled and confirm with employee requesting Red Zone</p>

Step 4. Release Red Zone	Employee that requested Red Zone	When physically clear of Red Zone, notify all applicable crew members and jobs.	"Clear of Red Zone" or Approved Hand Signal
---	--	--	---

Acknowledgement via Hand Signals

Prior to entering a Red Zone, a job briefing must be conducted informing all crew members that hand signals will be used to initiate and release a Red Zone using the following signals:

Prescribed Hand Signals:

Entering the Red Zone

Hand or lantern will be moved in a horizontal motion back and forth across the chest.

Prior to entering the Red Zone

Engineer must acknowledge by using whistle signal 5.8.2(4) or verbal confirmation that brakes are applied and reverser is centered.

Clear of the Red Zone

Hand or lantern will be held at arm's length above the head. Engineer must acknowledge verbally or whistle signal 5.8.2 (4).

[^Top](#)

81.5.5: Trainline Power Cables

Before going between equipment to work on or make adjustments to trains equipped with electrical power cables between cars, employees must ensure that electrical power to these cables is off unless cable is clear of the area where the employee will be working.

General Order

Add new rule:

Before going between equipment to work on or make adjustments to trains equipped with electrical power cables between cars, employees must ensure that electrical power to these cables is off unless cable is clear of the area where the employee will be working.

[^Top](#)

81.6: Placing Feet

Do not place feet on knuckles, uncoupling lever, drawbar assembly or any cushioning drawbar device.

[^Top](#)

81.7: Riding Equipment

81.7 Riding Equipment

1. Determine if You Should Ride

Ride cars or equipment only if necessary when duties require and only after determining that you can do so safely.

When determining whether cars or equipment should be ridden employee must consider:

- Alternatives such as repositioning locomotives to pull instead of shoving cars, repositioning of crew members or utilizing other employees to complete the task without having to ride moving equipment.
- Weather conditions that may cause unsafe conditions to ride, e.g. ice storms.
- Designs and configuration of cars that may make them unsuitable to ride.
- Selecting or repositioning other cars to ride.
- Your physical limitations.
- Potential slack action.
- Applicable Operating and Safety Rules.

2. Do Not Ride

Employees must not ride:

- On cars that are rolling free, except where a "Gravity Switch" has been authorized by a "Superintendent Bulletin" and then only when movement can be controlled by a hand brake located on the trailing end of the trailing car in the direction of movement (See Rule 7.7.1 Gravity Switch).
- On the end of a moving car – except as provided in this rule.
- On equipment where track conditions can not be clearly observed because of debris, snow, ice, water, grain, sand or mud.
- On sill step of cars (stirrup beneath ladder), engine steps, caboose steps or vestibule steps of cars when moving over a street or highway crossing, or yard access crossing.

Yard access crossing means a grade crossing that is located within the physical confines of a railroad yard and is either:

- Open to unrestricted public access;
or
- Open to persons other than railroad employees going about their normal duties, e.g., business guests or family members.
- On side ladders leading to engine cabs on full body type locomotives.
- On tank cars if it can possibly be avoided and never on the side ladder providing access to top of tank car.
- Inside equipment i.e. hopper cars, gondola cars, etc.
- On any part of coupler apparatus, center sill, side sill, or end sill.
- In a location where you may be struck or pinched by moving lading or equipment.

3. How to Ride

When riding on equipment employees must:

- Maintain three-point contact with hands and feet on fixed platforms and/or grab irons designed for this purpose. Hand brake may not be used as one of the required points of contact.
- Look in the direction of movement.
- Ride on the side of the car, the vertical plane of the end of the car must not be broken; except:
 - May ride on the brake or end platform on the trailing end of the last car in direction of movement.
 - When allowed to ride on the deck of a flat car.
 - May ride on end platform of ARMN cars equipped with an end platform and hand rails. The platform is located on the "A" end of the car.
 - May ride on end platform of ARMN cars equipped with an end platform and hand rails. The platform is located on the "A" end of the car.
- Only ride on cars equipped with two vertical hand holds or horizontal hand hold positioned to allow an erect body position.

4. Where to Ride

When riding on equipment employees must be positioned:

- When practicable, while making a pulling movement, on the brake or end platform on the trailing end of the last car in direction of movement.
- On the side of leading end of equipment in direction of movement.
- On deck of empty flat car or on a TOFC/COFC flat car only if you can mount the car safely and kneel or sit as near as possible to the center of the car until the car has come to a complete stop. If equipped with two vertical hand holds or horizontal hand hold positioned to allow an erect body position may ride on side of car.
- When riding empty bulkhead or centerbeam flat car, employee may ride on the

deck behind the bulkhead in the direction of movement and maintain three point contact while facing the direction of movement.

Riding tank cars:

Employees may only ride a tank car when the tank car is the first car of a shoving movement or the last car in a cut of cars being handled.

Employees must maintain 3 or 4 point contact and:

- When shoving:
 - o Be on leading end of leading car.
 - o Be positioned to ride behind the safety bar outside the gage of the track rail. If unable to ride behind the safety bar, employee may ride on the outer portion of the crossover platform facing direction of movement, positioned outside the gauge of the track.
 - o Place both feet on the car to provide secure contact with the car. If unable to place both feet in a secure position, employee must not ride the car.

- When pulling:
 - o Be on the trailing end platform of the last car, facing the direction of movement.
 - o Place both feet on the end platform to provide secure contact with the car.

~~Do not ride on moving equipment:~~

- ~~• unless your duties require,~~
- ~~• where the track conditions can not be clearly observed because of debris, snow, ice, water, grain, sand or mud,~~
- ~~• unless you can do so safely.~~

System Special Instruction

Change rule to read:

1. Determine if You Should Ride

Ride cars or equipment only if necessary when duties require and only after determining that you can do so safely.

When determining whether cars or equipment should be ridden employee must consider:

- Alternatives such as repositioning locomotives to pull instead of shoving cars, repositioning of crew members or utilizing other employees to complete the task without having to ride moving equipment.

- Weather conditions that may cause unsafe conditions to ride, e.g. ice storms.
- Designs and configuration of cars that may make them unsuitable to ride.
- Selecting or repositioning other cars to ride.
- Your physical limitations.
- Potential slack action.
- Applicable Operating and Safety Rules.

2. Do Not Ride

Employees must not ride:

- On cars that are rolling free, except where a "Gravity Switch" has been authorized by a "Superintendent Bulletin" and then only when movement can be controlled by a hand brake located on the trailing end of the trailing car in the direction of movement (See Rule 7.7.1 Gravity Switch).
- On the end of a moving car – except as provided in this rule.
- On equipment where track conditions can not be clearly observed because of debris, snow, ice, water, grain, sand or mud.
- On sill step of cars (stirrup beneath ladder), engine steps, caboose steps or vestibule steps of cars when moving over a street or highway crossing, or yard access crossing. Yard access crossing means a grade crossing that is located within the physical confines of a railroad yard and is either:
 - Open to unrestricted public access;
 - or
 - Open to persons other than railroad employees going about their normal duties, e.g., business guests or family members.
- On side ladders leading to engine cabs on full body type locomotives.
- On tank cars if can possibly be avoided and never on the side ladder providing access to top of tank car.
- Inside equipment i.e. hopper cars, gondola cars, etc.
- On any part of coupler apparatus, center sill, side sill, or end sill.
- In a location where you may be struck or pinched by moving lading or equipment.

3. How to Ride

When riding on equipment employees must:

- Maintain three-point contact with hands and feet on fixed platforms and/or grab irons designed for this purpose. Hand brake may not be used as one of the required points of contact.
- Look in the direction of movement.
- Ride on the side of the car, the vertical plane of the end of the car must not be broken; except:
 - May ride on the brake or end platform on the trailing end of the last car in direction of movement.

- When allowed to ride on the deck of a flat car.
- May ride on end platform of ARMN cars equipped with an end platform and hand rails. The platform is located on the "A" end of the car.
- May ride on end platform of ARMN cars equipped with an end platform and hand rails. The platform is located on the "A" end of the car.
- Only ride on cars equipped with two vertical hand holds or horizontal hand hold positioned to allow an erect body position.

4. Where to Ride

When riding on equipment employees must be positioned:

- When practicable, while making a pulling movement, on the brake or end platform on the trailing end of the last car in direction of movement.
- On the side of leading end of equipment in direction of movement.
- On deck of empty flat car or on a TOFC/COFC flat car only if you can mount the car safely and kneel or sit as near as possible to the center of the car until the car has come to a complete stop. If equipped with two vertical hand holds or horizontal hand hold positioned to allow an erect body position employee may ride on side of car.
- When riding empty bulkhead or centerbeam flat car, employee may ride on the deck behind the bulkhead in the direction of movement and maintain three point contact while facing the direction of movement.

Riding tank cars:

Employees may only ride a tank car when the tank car is the first car of a shoving movement or the last car in a cut of cars being handled.

Employees must maintain 3 or 4 point contact and:

- When shoving:
 - o Be on leading end of leading car.
 - o Be positioned to ride behind the safety bar outside the gauge of the track rail. If unable to ride behind the safety bar, employee may ride on the outer portion of the crossover platform facing direction of movement, positioned outside the gauge of the track.
 - o Place both feet on the car to provide secure contact with the car. If unable to place both feet in a secure position, employee must not ride the car.
- When pulling:
 - o Be on the trailing end platform of the last car, facing the direction of movement.
 - o Place both feet on the end platform to provide secure contact with the car.

General Order

Change numbering of items in SSI, pages 113 and 114 as follows:

2. Do Not Ride
3. How to Ride
4. Where to Ride

Change second dash under first bullet in Part 4 under "Riding tank cars" to read:
- Be positioned to ride behind the safety bar outside the gauge of the track. If unable to ride behind the safety bar, employee may ride on the outer portion of the crossover platform facing direction of movement, positioned outside the gauge of the track.

[^Top](#)

81.7.1: Designated Riding Places

~~Unless otherwise authorized, when required to ride on cars, engines or other equipment, employees must:~~

- ~~• ride on designated steps, ladders or platforms,~~
- ~~• ride on the side ladder of the leading end of the car in direction of movement,~~
- ~~• except may ride on trailing end of the trailing car.~~

~~When riding engines, cars or equipment, look in the direction of movement and maintain three-point contact (two feet and one hand or two hands and one foot).~~

~~Unless otherwise authorized, employees must not:~~

- ~~• Ride on the ends of moving cars, except:
- on the trailing end of the trailing car,
- when necessary to operate hand brakes to stop
or
- to control the speed of cars cut off in motion.~~
- ~~• Sit with feet protruding over the sides or ends of cars or equipment.~~
- ~~• Ride on sill step (stirrup beneath ladder), engine steps, caboose steps or vestibule steps of cars when moving over a street or highway crossing.~~
- ~~• Ride on side ladders leading to engine cabs on full body type locomotives.~~
- ~~• Ride inside equipment i.e. hopper cars, gondola cars, etc.~~

System Special Instruction

81.7.1 Designated Riding Places

Delete rule.

[^Top](#)

81.7.2: Unexpected Movement

When on or in engines, cars, cabooses or other equipment, anticipate and protect yourself from sudden stops, starts, slack action, excessive lateral, or unexpected motions.

When duties require moving around in equipment, be adequately braced, maintain a firm hand hold and sit down quickly and safely. Unless duties require otherwise, remain seated when stopping, entering or leaving initial or final terminals. Stay out of cars being or about to be switched and notify all occupants before switching cars.

When above normal vertical or lateral motion is detected on a locomotive, the train dispatcher should be notified. Engineer will reduce speed to a level that provides a normal ride.

[^Top](#)

81.7.3: Shifting Lading

Do not:

- Stand or place any part of your body on or between the side or end of a car loaded with lumber, pipe or other lading that could shift.
- Put yourself in a position where you can be struck by improperly secured or unsecured drop ends that may fall inwards.
- Hold on to the end post or stand near the end door on a gondola equipped with drop ends.

[^Top](#)

81.7.4: Riding Flat Cars or Intermodal Cars

~~Riding the side of any flat car or any type of intermodal equipment is prohibited unless equipped with either two vertically mounted handholds, or horizontal grab irons that are part of a riding ladder and of sufficient height to provide balance. If necessary to ride flat cars not so equipped:~~

- ~~• Take a safe position near the center of the car, either seated or with feet shoulder width apart, with one foot forward and knees slightly bent.~~
- ~~• Face and look in the direction of movement.~~
- ~~• Use extreme caution and be prepared for slack action or unexpected movement.~~

System Special Instruction

81.7.4 Riding Flat Cars or Intermodal Cars

~~Delete rule.~~

[^Top](#)

81.7.4.1: Riding Bulkhead Flat Cars and Centerbeam Flat Cars

~~Avoid riding the side of bulkhead flat cars and centerbeam flat cars unless equipped with either two vertically mounted hand holds or horizontal grab irons that are at least chest height when standing on sill step.~~

~~When riding a bulkhead flat car or centerbeam flat car, do not place any part of your body between lading and bulkhead.~~

~~It is permissible to ride on the deck of an empty bulkhead flat car or empty centerbeam flat car. When doing so, position yourself on the deck behind the bulkhead in direction of movement. Maintain a three-point contact (two feet and one hand) with a firm grip on the side grab iron and face the direction of movement.~~

System Special Instruction

81.7.4.1 Riding Bulkhead Flat Cars and Centerbeam Flat Cars

~~Delete rule.~~

[^Top](#)

81.7.5: Riding Tank Cars

~~Avoid riding on tank cars. When necessary to ride on the crossover platform of a tank car, employees must ride on the outer portion of the crossover platform, positioned outside the nearest rail.~~

- ~~On the trailing end, face the end platform safety railing.~~
- ~~On the leading end, your back must be against the safety railing.~~

~~Maintain a three point or four point contact (two feet and one or both hands). Do not ride on the side ladder of a tank car.~~

System Special Instruction

81.7.5 Riding Tank Cars

Delete rule.

[^Top](#)

81.7.6: Business Cars or Passenger Equipment

Side and trap doors of vestibules must be kept closed while the train is in motion, except when attended by a crew member. When vestibules are in use at stations, open them only on the side where passengers are received and discharged. An end gate must be placed at the rear of the last car in a train if the car is vestibuled. If the car is not vestibuled, a chain or crossbar must be used.

Trainmen must know that end gates or chains are in the proper position at the end of each car when making cuts between occupied passenger cars during switching operations.

[^Top](#)

81.7.7: Riding Locomotive Cranes and Work Equipment

Do not go out on a ledge, running board or any other outside part of moving locomotive cranes or other roadway equipment. However, a designated groundman is permitted to ride on the locomotive crane footboard that is equipped with a standard riding cage under the following conditions:

- Riding is only allowed at the project site and as necessary to support bridge work. The limitations of the project site shall be as follows:
 - (a) From the material staging area to the bridge, not to exceed 1,400 feet.

and

- (b) No more than 300 feet past either end of the bridge.

- Riding is not permitted through public road crossings.
- The maximum crane speed is 10 MPH.
- When riding on the leading end, the crane operator must have the rider in visual sight at all times.
- Riding is not permitted on the same end of the crane that cars are coupled to.
- The crane will approach no closer than one car length from standing equipment.

The footboard shall be large enough to completely and firmly support both feet of the rider.
The rider must have three-point contact at all times.

- The footboard and riding cage must be inspected daily and repaired immediately if damaged.
- Cage must be removed when the locomotive crane is entrained.

Do not ride on cranes, ditchers, other machines or cars on which machines are mounted without proper authority.

System Special Instruction

81.7.7 Riding Locomotive Cranes and work Equipment

Change rule to read:

Do not go out on a ledge, running board or any other outside part of moving locomotive cranes or other roadway equipment. However, a designated groundman is permitted to ride on the locomotive crane footboard that is equipped with a standard riding cage under the following conditions:

- Riding is only allowed at the project site and as necessary to support bridge work. The limitations of the project site shall be as follows:
 - (a) From the material staging area to the bridge, not to exceed 1,400 feet.

and

(b) No more than 300 feet past either end of the bridge.

- Riding is not permitted through public road crossings.
- The maximum crane speed is 10 MPH.
- When riding on the leading end, the crane operator must have the rider in visual sight at all times.
- Riding is not permitted on the same end of the crane that cars are coupled to.
- The crane will approach no closer than one car length from standing equipment.

The footboard shall be large enough to completely and firmly support both feet of the rider. The rider must have three-point contact at all times.

- The footboard and riding cage must be inspected daily and repaired immediately if damaged.
- Cage must be removed when the locomotive crane is entrained.

Do not ride on cranes, ditchers, other machines or cars on which machines are mounted without proper authority.

[^Top](#)

81.8: Close Clearances

[^Top](#)

81.8.1: Avoiding Fouling Hazards

Do not leave equipment standing where it will foul equipment on adjacent tracks or cause injury to employees riding on the side of a car or engine.

On tracks where clearance point is indicated, leave equipment beyond the clearance point.

If clearance point is not indicated or visible, determine clearance point by standing outside the rail of adjacent track and extending arm towards the equipment. When unable to touch equipment, leave the equipment at least an additional 50 feet into the track to ensure equipment is beyond the clearance point.

Equipment may be left on a:

- Main track, fouling a siding track switch, when the switch is lined for the main track.
- Siding, fouling a main track switch, when the switch is lined for the siding.
- Yard switching lead, fouling a yard track switch, when the switch is lined for the yard switching lead.
- or
- Industry track beyond the clearance point of the switch leading to the industry.

When machines, tools, material or other equipment are left where adjacent track(s) may be fouled, notify supervisor. They must arrange to restrict movement on the affected track(s) until the work is completed and the fouling hazard is eliminated.

~~Do not leave cars or engines standing where they will foul equipment on adjacent tracks or cause injury to others riding on the side of a car or engine.~~

~~Cars and engines must be left clear of designated fouling point as indicated by a cone and / or painted mark on the rail to indicate clearance point.~~

~~If clearance point is not marked, an employee may determine clearance point by standing outside the rail of the adjacent track and extending their arm towards the equipment. When unable to touch equipment, you have determined the clearance point. Equipment must be left an additional 50 feet into the track to ensure equipment is beyond the clearance point.~~

~~During switching operations, ensure cars are clear an adjacent track, before shoving additional cars into the track. When kicking cars, crew member must ensure that cars are clear and will remain clear of the fouling point before kicking additional cars.~~

~~Prior to tying up or leaving switching locations, employees must ensure that all cars and engines left on yard tracks are beyond designated or determined clearance point. When cars or engines are left on a yard track and yard lead, due to track capacity, ensure the equipment is occupying the yard lead, not left just to foul the yard lead, and switches are lined toward the equipment.~~

~~When machines, tools, material or other equipment are left where adjacent track(s) may be fouled, notify supervisor. They must arrange to restrict movement on the affected track(s) until the work is completed and the fouling hazard is eliminated.~~

System Special Instruction

81.8.1 Avoid Fouling Hazards

Change rule to read:

Do not leave equipment standing where it will foul equipment on adjacent tracks or cause injury to employees riding on the side of a car or engine.

On tracks where clearance point is indicated, leave equipment beyond the clearance point.

If clearance point is not indicated or visible, determine clearance point by standing outside the rail of adjacent track and extending arm towards the equipment. When unable to touch equipment, leave the equipment at least an additional 50 feet into the track to ensure equipment is beyond the clearance point.

Equipment may be left on a:

- Main track, fouling a siding track switch, when the switch is lined for the main track.
- Siding, fouling a main track switch, when the switch is lined for the siding.
- Yard switching lead, fouling a yard track switch, when the switch is lined for the yard switching lead.
- or
- Industry track beyond the clearance point of the switch leading to the industry.

When machines, tools, material or other equipment are left where adjacent track(s) may be fouled, notify supervisor. They must arrange to restrict movement on the affected track(s) until the work is completed and the fouling hazard is eliminated.

[^Top](#)

81.8.2: Maintain Lookout


Keep a careful lookout in both directions for trains, engines or cars on adjacent tracks. Look for other close clearances when duties require any part of the body to be extended beyond the side of a moving or standing engine or car.

[^Top](#)

81.8.3: Impaired Clearances

Do not ride on the side of a moving car, engine or other equipment under any of the following conditions:

- Next to a structure.
- Through gates or doorways.
- Into, out-of, or within enclosed buildings. Before entering enclosed buildings, an employee, if safe to do so, must precede the movement. Further movements must only be made on that employee's signal.
- Any time equipment on an adjacent track is foul of or appears to be foul of clearance point.
- In a curve or through a turnout when there is less than 6 feet between the ends of ties of adjacent tracks and:
 - There are cars on the adjacent track in the curve or turnout.
 - If in doubt that the distance between the ends of the ties between the tracks is at least 6 feet.

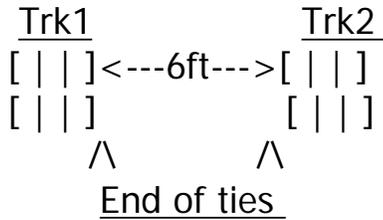


- In addition, do not position yourself or knowingly allow others to position themselves between a structure and moving car(s), engine(s) or other equipment when clearance is minimal.

System Special Instruction

81.8.3 Impaired Clearances

Add two new bullets reading:

- Any time equipment on an adjacent track is foul of or appears to be foul of clearance point.
- In a curve or through a turnout when there is less than 6 feet between the ends of ties of adjacent tracks and:
 - There are cars on the adjacent track in the curve or turnout.
 - If in doubt that the distance between the ends of the ties between the tracks is at least 6 feet.

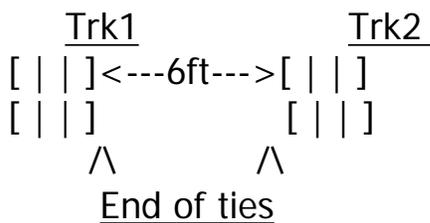

[^Top](#)

81.9: Cars in Motion

Do not break seals, remove hasps, open or close freight car doors or perform repairs while cars are in motion.

[^Top](#)

81.10: Moving Equipment in Locomotive, Car, or Maintenance of Way Repair Facilities

Before moving any equipment, a job briefing will be conducted between all involved in the move which must include a thorough understanding of what will happen and what hand signals or radio communication will be used.

- Cars must be coupled or secured to the locomotive, car mover or equipment, unless Repair Facility car moving systems are designed for other operation.
- Maximum speed must not exceed 5 mph.
- If hand signals are used, and the person giving signals disappears from view, movement must be stopped (see Rule 5.3.3, Signal Disappearance). If radio communication is used, distance and direction must be specified (see Rule 6.5 Shoving Movements. ~~5.3.7 Radio Response~~ ~~2.13 In Place of Hand Signals~~).

System Special Instruction

81.10: Moving Equipment in Locomotive, Car, or Maintenance of Way Repair Facilities

In third bullet change rule reference at end to (see Rule 6.5 Shoving Movements. ~~5.3.7 Radio Response~~).

General Order

81.10: Moving Equipment in Locomotive, Car, or Maintenance of Way Repair Facilities

In third bullet change rule reference at end to (see Rule 6.5 Shoving Movements).

[^Top](#)

81.10.1: Using Mobile Equipment

When using Trackmobile, car mover or other work equipment as the prime mover:

- Cars will be inspected for safety defects prior to movement. If defects are found that prevent safe movement, corrective action must be taken to prevent derailment or further damage.

- The operator or groundman will notify all affected employees, including others moving cars and/or locomotives, prior to movement. Car(s) will be inspected for persons on, under or between before coupling.
- When coupling to cars the operator or groundman must observe that coupler pin has dropped before movement. Cars left standing must be properly secured (Rule 32.1).
- Pedestrian and vehicular crossings will be cleared prior to movement. A groundman will ensure that vehicles or pedestrians do not foul the move.
- A groundman must be in a position to protect the movement when the operator is not pulling the cars. The groundman must remain in plain sight on the operator's side. If visual contact is lost between operator and groundman, all movement must stop.

[^Top](#)

81.10.2: Using Locomotive

When locomotive is used as the controlling unit, either single, as multiple coupled units, or a locomotive consist:

- If the operator is in the lead unit with the controlling cab facing the direction of movement, protection for the movement is not required if the operator can visually determine that there are no obstructions and the move can be made safely.
- If the operator is not in the lead unit with the controlling cab facing the direction of movement, protection for the movement is required and an attendant must be positioned on the end of the locomotive in the direction of movement or a groundman positioned ahead of the move to be able to visually determine there are no obstructions in the direction of movement and the movement can be made safely.
- When a spotting operation involves movement of less than ten feet, the movement may be made without a groundman ahead of the movement.
- When making coupling, attendant must stop movement and be on the ground when coupling is made.
- After coupling to other equipment, stretch the slack to ensure the coupling was made.
- After movement is complete, secure all locomotives and/or equipment as per operating rules. Follow applicable shut-down policy.

[^Top](#)

81.10.3: One Person Operations

Where one person is employed or is the only employee available to move locomotives or cars. Movement may be made as follows:

1. Ensure that the area is protected in accordance with Rule 5.13, Blue Signal Protection for Workmen.
2. Determine by visual inspection that no person is on, under or between the equipment. Confirm that no personnel or rolling equipment will enter track where move is to be made.
3. Determine by visual inspection that other equipment or structures will not be struck, or insufficient clearances created, by moving locomotives or equipment.
4. On locomotives, place the independent brake valve handle in the service zone and make a visual inspection to ensure that brakes apply. After ensuring that brakes are operational on the controlling unit, release hand brakes.
5. Turn on headlight to the front and rear when possible.
6. On locomotives, ring the bell before moving and during the entire movement.
7. Sound the whistle prior to moving, when reversing direction of movement, when approaching crossing and when employees or others are seen within the area of movement.
8. Operate the locomotive or controlling equipment facing the direction of movement whenever possible. Stop before coupling and then proceed to make coupling.
9. After coupling to other equipment, stretch the slack to ensure the coupling was made.
10. Do not make movements farther than the distance inspected in steps 2 and 3 above, unless additional visual inspections are completed.
11. After movement is complete, secure all locomotives and/or equipment as per operating rules. Follow applicable shut-down policy.

[^Top](#)

81.11: Hand Brake

When operating hand brake inspect for defects. Use good body mechanics. Have firm footing and hand hold to prevent slipping, falling or injuries (e.g., sprains, strains). When applying or releasing wheel type brake, thumb must be positioned on the outside of the wheel.

End-mounted brake on equipment equipped with a brake step or platform and locomotive hand brake must be applied or released from a position on the equipment. When climbing on equipment maintain at least a three point contact. Three-point contact consists of both feet and one hand or both hands and one foot touching the equipment. Do not place both hands on the brake wheel.

Side-mounted hand brake on equipment may be operated from the ground provided the brake mechanism is within easy reach and you are able to use good body mechanics while operating them.

End-mounted hand brake on TOFC/COFC and similarly configured cars may be operated

from the ground provided the brake mechanism is within easy reach and you are able to use good body mechanics while operating them. ~~without brake steps or crossover platforms may be operated from a position on the ground at the side of the car.~~

Horizontal wheel (staff) hand brake on any car, and end-mounted inward facing hand brake on TOFC/COFC cars, must be operated from a position on the car.

Hand brake must not be applied or released from the ground when car is in motion. The use of a brake club, bar or other material to apply or release the brake is prohibited.

In addition, **do not**:

- use end ladders to go up or down the car,
- brace any part of your body against another car,
- place feet in a wheel or on a hand brake lever or pawl,
- hold brake tension on a moving car by hand without using a pawl and ratchet,
- place undue strain on your body which may cause physical injury.

System Special Instruction

81.11 Hand brakes

Under End Mounted Hand Brake change to read:

End-mounted hand brake on TOFC/COFC and similarly configured cars may be operated from the ground provided the brake mechanism is within easy reach and you are able to use good body mechanics while operating them.

[^Top](#)

81.11.1: Releasing Hand Brake

Use caution when releasing hand brake. Obtain help when necessary. Avoid being struck by the brake wheel when the pawl is released. Avoid having clothing or hand caught in a spinning brake wheel.

When unable to release a hand brake that has been set after an air brake application, if possible, follow this procedure:

- Recharge train line pressure of the car.
- Reapply air brake (to relieve tension on the hand brake chain).
- Release the hand brake by hand.

[^Top](#)

81.11.2: Difficult or Defective Hand Brake

If hand brake is difficult to operate, or if it is defective or damaged such that it does not function properly, do not attempt to operate it. Report the defective brake to proper authority and attach a bad order tag to hand brake wheel or lever.

[^Top](#)

81.11.3: Brake Sticks

Brake Sticks approved by the company may be used to operate handbrakes.

Operation:

- Adjust the stick to the desired length by loosening the locking mechanism and clicking the extension notch into position.
- When tightening the locking mechanism, make sure the indicator ring is flush with the bottom of the locking mechanism to ensure the brake stick is both aligned with the extension notch and fully engaged.
- Place the hook to the outside of the wheel, not inside between the wheel and the car, to avoid the hook from being caught.

Safety Precautions:

- Never walk backwards when using a brake stick.
- When practicable, work from a location to the field side rather than between adjacent tracks.
- The long handle can easily foul an adjacent track so be alert to keep clear of moving equipment.
- Never operate a quick release brake by the handle.
- Never place the butt of the brake stick against your body. Keep it at the side to ensure, in the unlikely event of a kick back, the end will not strike you.
- Pass the brake stick through equipment, do not climb or cross equipment with the brake stick in your hand.

[^Top](#)

81.12: Wheel Chocks

Use wheel chocks where required. When installing or removing wheel chocks, keep all parts of your body outside of the rail and avoid pinch points.

[^Top](#)

81.13: Coupling and Uncoupling

Local instructions may be issued requiring movement to stop before coupling is made.

When couplings are being made:

- Stand in the clear when a coupling or uncoupling is being made.
- Stop the movement before coupling if instructions require or when necessary to ensure couplers are in proper alignment and knuckle is open. .
- Ensure couplers are in proper alignment and knuckle is open.

Do not:

- Ride the side of cars to point of impact.
- Use your feet to operate the uncoupling lever.
- Use excessive force or jerk on the uncoupling lever which may cause physical injury.
- Operate an uncoupling lever on a car or engine while riding on another car or engine.

~~do not ride the side of cars to point of impact. Stand in the clear when a coupling or uncoupling is being made.~~

~~Operate the uncoupling lever with hand next to equipment and face direction of movement. Do not use your feet to operate the uncoupling lever.~~

~~Do not use excessive force or jerk on the uncoupling lever which may cause physical injury. Do not operate an uncoupling lever on a car or engine while riding on another car or engine.~~

Be alert for pinch points. Always place your hand on portion of uncoupling lever that is designed as the handle.

Use the uncoupling lever to open knuckles when possible.

If you must use hands to open the knuckle on standing equipment, keep both feet from

between the rails if possible. During coupling operations, separate equipment at least 50 ~~100~~ feet and stop equipment before reaching in. Make sure the knuckle pin is in place before putting your hand on the knuckle.

When air hose is charged turn your face away from the air hose while uncoupling (see Rule 81.13.8, Coupling and Uncoupling Hoses).

System Special Instruction

81.13: Coupling and Uncoupling

Change rule to read:

Local instructions may be issued requiring movement to stop before coupling is made.

When couplings are being made:

- Stand in the clear when a coupling or uncoupling is being made.
- Stop the movement before coupling if instructions require or when necessary to ensure couplers are in proper alignment and knuckle is open.
- Ensure couplers are in proper alignment and knuckle is open.

Do not:

- Ride the side of cars to point of impact.
- Use your feet to operate the uncoupling lever.
- Use excessive force or jerk on the uncoupling lever which may cause physical injury.
- Operate an uncoupling lever on a car or engine while riding on another car or engine.

Be alert for pinch points. Always place your hand on portion of uncoupling lever that is designed as the handle.

Use the uncoupling lever to open knuckles when possible.

If you must use hands to open the knuckle on standing equipment, keep both feet from between the rails if possible. During coupling operations, separate equipment at least 100 feet and stop equipment before reaching in. Make sure the knuckle pin is in place before putting your hand on the knuckle.

When air hose is charged turn your face away from the air hose while uncoupling (see Rule 81.13.8, Coupling and Uncoupling Hoses).

[^Top](#)

81.13.1: Going between Cars

Do not go between or in front of a moving engine or car to arrange knuckles or couplers, to manipulate other appliances or for any other reason.

When it is necessary to separate equipment to make adjustments, the following applies:

- Separate the equipment at least 100 feet.
- Allow the slack to adjust.
- ~~Apply sufficient hand brakes on the portion not coupled to the locomotive to prevent movement. However, on tracks where cars are likely to roll together, at least two hand brakes must be applied.~~

On tracks where cars are likely to roll together, apply sufficient hand brakes, but not less than two, on the unattached portion to prevent movement before going between cars.

System Special Instruction

81.13.1 Going between Cars

Change last bullet to read:

- On tracks where cars are likely to roll together, apply sufficient hand brakes, but not less than two, on the unattached portion to prevent movement before going between cars.

[^Top](#)

81.13.2: Coupler and End Sill

Do not place any part of the body on or between a coupler and car end sill, even if the car is equipped with standard draft gear arrangements, sliding sill arrangements, or an end-of-car cushioning device.

When near cars equipped with movable center sills take precautions to avoid injury in case of movement, even though the car is standing.

[^Top](#)

81.13.3: Coupler Adjustment

When necessary to make a coupler adjustment:

- separate equipment at least 100 feet and equipment must be stopped,
- when manually adjusting couplers, carefully follow the procedures outlined in ~~Rule 75.1~~ 70.4, Lifting and Moving Materials,
- avoid lifting the full weight of couplers,
- do not kick or use your foot to make a coupler adjustment,
- coupler must move without applying excessive force. (If unable to make the adjustment using reasonable force use a Knuckle-Mate or coupler alignment strap, if available.)

System Special Instruction

81.13.3 Coupler Adjustment

Rule reference number in second bullet should be 70.4.

[^Top](#)

81.13.4: Using a Knuckle-Mate

When using a Knuckle-Mate to adjust a mis-matched coupler, the following procedure must be used:

1. Separate the mis-matched couplers at least 100 feet then close the knuckle of the coupler or couplers that need adjustment.
2. Place the Knuckle-Mate over the top of the knuckle, making sure the central pin is securely in the hole of the knuckle (pin may be adjusted by loosening the levered nut).
3. Assume a braced position with both hands on the handle.
4. Exert a steady pull on the handle, being careful that an unexpected movement of the coupler does not cause overbalance.
5. When couplers are properly aligned, remove the Knuckle-Mate, open at least one knuckle, stand clear of the equipment and proceed with the coupling.
6. Return the Knuckle-Mate to its assigned location.

[^Top](#)

81.13.5: Using a Coupler Alignment Strap

When using a coupler alignment strap to adjust misaligned couplers, the following procedure

must be used.

1. Separate the cars with mis-aligned coupler(s) at least 100 feet.
2. Apply sufficient hand brakes to secure the car(s) not coupled to the engine.
3. Close knuckles on both cars and check that the locking blocks have dropped.
4. Check for large burrs on the knuckle surfaces that could cut or damage the nylon material of the strap. If a burr or other defect is discovered that would damage the strap, change the knuckle or notify mechanical personnel for assistance.
5. Place one loop on the strap inside the closed knuckle on the mis-aligned coupler. Lay the remaining strap material on the top of the coupler shank.
6. Move the equipment together until the couplers are about three feet apart.
7. Keeping one foot outside the rail, place the remaining strap loop inside the closed knuckle of the coupler to be used for pulling.
8. Stand clear of the track and the alignment strap.
9. Move the engine very slowly in the direction that tightens the strap until the coupler is centered.
10. Move the engine in the direction, that puts slack back into the strap, until about three feet separates the equipment.
11. Keep one foot outside the rail. Lift the uncoupling lever to open the knuckle and remove the strap.
12. Remove the strap from the other knuckle.

[^Top](#)

81.13.6: Replacing Knuckles

Use the correct knuckle type:

1. Keep your feet clear of the area under the coupler to the extent possible, make sure the knuckle pin is in place, then open the knuckle.
2. Remove the pin and place within easy reach.
3. Remove the knuckle from the coupler and holding it as close to the body as possible, dispose of it where it will not become a tripping hazard.
4. Holding the uncoupling lever up, move the knuckle thrower back into the coupler recess as far as it will go.
5. Use good body mechanics and lift the knuckle and place it into the coupler pocket.
6. Insert the knuckle pin into the pin hole, close the knuckle and check to see that it locks properly. Do not close it with your foot.

[^Top](#)

81.13.7: Opening Angle Cock

Do not kick, strike or shake pressurized hose couplings. Turning angle cock on moving equipment is prohibited.

Before opening the angle cock to an uncoupled air hose:

1. Grasp the hose at the glad hand, clear of the vent port.
2. Brace the glad hand firmly against your thigh just above the knee with vent port directed away from you.
3. Turn your face away from the glad hand before opening the angle cock.

When opening angle cock the following procedure must be used:

1. Open angle cock slowly. Do not use excessive force.
2. Keep your legs and feet clear of the air hose coupling.
3. Listen for air escaping, which will indicate a faulty coupling which may fly apart.
4. If an air leak is heard, close both angle cocks and make sure the pressure in the hoses is fully depleted before attempting adjustment or repair.

[^Top](#)

81.13.8: Coupling and Uncoupling Hoses

When coupling and uncoupling hoses the following applies:

- Avoid being struck or burned when coupling air hoses or steam connections.
- Before coupling or uncoupling air hoses by hand, or before operating angle cocks, have a clear understanding with the engineer and other crew members as to the work to be performed.
- When coupling air hoses together or uncoupling air hoses by hand, keep one foot outside the rail and place the other inside the rail. However, when coupling high air dump hoses on cars so equipped, it is permissible to place both feet between the rails. Be prepared to step out should the equipment move.
- When necessary to part air brake train line hose connections ~~or locomotive control connections~~, close the angle ~~or cutout~~ cocks, grasp the hoses firmly, and turn your face away while making the uncoupling.
- When separating locomotives allow air hoses to pull apart with the movement of the locomotives.

System Special Instruction

81.13.8: Coupling and Uncoupling Hoses

Change rule to read:

When coupling and uncoupling hoses the following applies:

- Avoid being struck or burned when coupling air hoses or steam connections.
- Before coupling or uncoupling air hoses by hand, or before operating angle cocks, have a clear understanding with the engineer and other crew members as to the work to be performed.
- When coupling air hoses together or uncoupling air hoses by hand, keep one foot outside the rail and place the other inside the rail. However, when coupling high air dump hoses on cars so equipped, it is permissible to place both feet between the rails. Be prepared to step out should the equipment move.
- When necessary to part air brake train line hose connections, close angle cocks, grasp the hoses firmly, and turn your face away while making the uncoupling.
- When separating locomotives allow air hoses to pull apart with the movement of the locomotives.

[^Top](#)

81.14: Dump Cars

When dumping loads or working around dump doors:

- Before opening the dump door on a car, ensure that all persons are clear on both sides and that no one is inside the car.
- Do not close dump doors of empty cars while cars are in motion.
- Do not be on or inside cars when it is necessary to “shake” or “bump” cars to loosen gravel or other material.
- Do not ride in air dump cars.

Note: See **Rule 1.35, Dump Doors**.

[^Top](#)

81.15: Car Doors

When opening or closing doors, keep fingers clear of the edge or door jamb, casting or rail on which the door travels. Keep your body clear of the door opening to avoid injury from falling freight.

Check box car doors for damage by thoroughly inspecting the top and bottom track and rollers. On plug doors examine the roller assembly, locking rods and all crank arms. Make sure the door is properly tracked before opening it. If the door is off track, take necessary precautions before opening it. If there is evidence of load shift, i.e. bulging door, take action to relieve the pressure on the car door before opening it. Guard against spinning or kicking of handles.

Do not move car, without door stops in place, unless the door has been secured by other means to prevent movement of the door.

Close and open doors with a mechanical device if normal force used by one person cannot accomplish the task. Use of excessive force is prohibited. Always position yourself in the clear, should the door fall, and be prepared for any sudden movement of the door. Use proper body positioning to prevent injury.

Train service employees should not attempt to close plug or swinging type doors. If a plug door is found open enroute, car may continue in the train to the next location where mechanical forces are available to close the door.

System Special Instruction

81.15 Car Doors

Add paragraph:

Train service employees should not attempt to close plug or swinging type doors. If a plug door is found open enroute, car may continue in the train to the next location where mechanical forces are available to close the door.

[^Top](#)

81.16: Load Dividers

Inspect the load dividers on a railcar carefully before operating to be certain load divider is properly tracked. The upper and lower crane rails must be free of defect that could derail or hinder load divider operations. If load divider is off track or safety straps are not in place, necessary precautions must be taken to safeguard its use. Do not push or move the door into an area that has not been inspected or is not properly tracked.

Operators should position their body to prevent injury in the event of unsuspected movement, falling or stopping of load divider. While operating load dividers, fingers must be kept clear of

pinch points and feet clear of gate swing to avoid foot injury.

[^Top](#)

81.17: Cars Being Loaded or Unloaded

Personnel who load or unload cars are responsible to:

- Remove and clear platforms, boards, tank car couplings and connections, conveyers, loading or unloading spouts, similar appliances or connections, vehicles and other obstructions.
- Ensure plug-type and swinging doors on cars are closed.
- Make sure persons in, on or about cars have vacated cars before allowing switching.
- Avoid damaging lading of partly loaded cars.
- If cars are equipped with bridge plates, raise and lock the plates.

Preventing Uneven Loads. When loading or unloading cars, take precautions to prevent the load from becoming unevenly distributed which may cause the car to overturn or derail.

Do not handle cars with improper or uneven loads if the load could shift or fall from the car or the car could derail or overturn.

[^Top](#)

81.18: Loading Roadway Equipment

Observe loading rules when loading and securing roadway equipment, cranes, dragline or other similar equipment loaded on cars.

At stations where Car Department personnel are not available, cars loaded with roadway machinery must be inspected and must not be moved until authorized by the train dispatcher. The train dispatcher must not authorize movement until receiving advice that the cars are loaded according to loading rules and are safe for movement. The train dispatcher must request Car Department personnel at the first inspection point enroute.

Cars loaded with roadway equipment must receive frequent inspection enroute and must be inspected by Car Department personnel at the first station they are available.

[^Top](#)

81.19: Air Brake Rigging

When working on the air brake rigging of ~~locomotives~~, cars or other equipment, except locomotives, the air brakes must be cut out and the air reservoir must be drained until repairs are completed.

System Special Instruction

Change rule to read:

When working on air brake rigging of cars or other equipment, except locomotives, the air reservoir must be drained until repairs are completed.

[^Top](#)

81.20: Moving In and Out of Equipment or On Equipment

Always use door handles or grab irons to open and close doors. Wind and slack action will often cause the doors to slam shut. Face the door and keep hands and fingers clear of door edges and door jams. Always use grab irons, railing or other secure fixtures to prevent being thrown about.

When entering equipment be observant, allow eyes to adjust to changing light level. At night turn on interior lights, if available, and use a light in areas of low visibility (see Rule 80.6, Working At Night Or Low Light Level). When entering equipment be prepared for missing floor panels (see Rule 81.21.3, Locomotive Cab Floor). Equipment varies in step and ladder arrangement. Know your equipment. Do not allow tools, chains or other items to be placed where you have to step.

When entering equipment be prepared for electrical or other compartment doors that may have been left open. Keep all electrical and other compartment doors securely latched when locomotive is under load, except when locomotive forces are conducting load tests. Report all defective latches and doors that will not stay closed.

If you observe oil or other foreign substances on ladders, steps or walkways, warn other employees and if practicable, avoid using that part of the equipment until the condition is corrected. Be sure you report it properly if you cannot correct it yourself.

[^Top](#)

81.21: Locomotives, Working On or About

The generator field switch must be in the "OFF" position while working on or inspecting the main generator or power circuits on diesel locomotives. On multiple unit locomotives, the power plant must be isolated from control. When traction motors are to be inspected, the generator field switch must be "OFF", the throttle closed, the reverser handle removed and the air brakes set. At locations other than established inspection or shop locations, the employee making the inspection must carry the reverser handle with him while making the inspection and tag the control stand "out of service".

Do not repair any switches, contactors or relays on locomotives without first shutting down the diesel engine and opening the control switch and the main battery switch. Do not attempt repairs on switches, contractor relays or related electrical apparatus without first shutting off all power. A volt meter must be used to ensure all current has been disconnected before starting repairs.

[^Top](#)

81.21.1: General Requirements

While working on or about locomotives:

- know that all workmen are in a safe position before starting an engine,
- keep safety guards in position and fastened,
- keep hands out of radiator shutters and all other equipment that engage automatically.
- keep engine room, cab, running boards, catwalks, steps and grab irons clean and free from oil, grease, rags, debris, obstructions, snow, ice, sand, etc,
- place material or equipment on locomotives where it will not create a hazard while being transported.

[^Top](#)

81.21.2: Restrictions

Do not:

- put face or hands near the main generator or any high-voltage equipment while it is working under load,
- smoke or have an open flame in the engine room,
- pull fuses while they are under load,

- open ground relay protective knife switches when ground relay is tripping,
- manually operate high-voltage contactors while the engine is in motion, even though the power plant supplying that particular cabinet is shut down,
- use hands, feet or improvised objects to close or open contacts while under electrical load,
- open high-voltage cabinet when the engine is under load.

EXCEPTION: This does not apply to mechanical forces for inspection purposes.

After performing engine maintenance, make sure no tools are left lying near electrical or rotating equipment.

[^Top](#)

81.21.3: Locomotive Cab Floor

If necessary to remove floor boards for inspection or repair purposes:

- “Danger Floor Out” sign must be placed at each door to the locomotive cab at all times when the floor board(s) are removed.
- Floor board(s) should be replaced when leaving the cab. If it is not practical to replace the floor boards due to work in progress and there is potential for anyone entering the cab, the cab doors must have yellow caution tape tied across the door openings. If available, a flashing red strobe light may also be left in the locomotive cab.
- If possible, locomotive cab lights should be left on so the opening is visible.
- Floor board(s) must be replaced when work is complete.

[^Top](#)

81.22: Securing Supply Apparatus

When supplying a train with fuel, water and/or sand, replace and secure the apparatus in a position clear of tracks.

[^Top](#)

81.23: Lockout Protection Required

Lockout protection must be provided before beginning work activities that require protection for employees or contractors not governed by other lockout protection rules as follows.

A. Effective Lockout Protection

Line the switch away from movement or place a derail at least 150 feet (50 feet if track speed is 5 MPH) from end of rolling equipment and secure the switch or derail with an effective locking device. The derail or switch must be able to restrict access to the portion of track where work is being performed.

One Locking Device.

Use one locking device if the employees being protected:

- Are assigned to work together as a unit under a common authority.
- Communicate with each other while working.

Additional Locking Devices.

If more than one working group exists, the employees must communicate and apply an additional locking device to the derail or switch.

B. Red Flag

At each lockout position, display a red flag that can be clearly seen during the day. At night, display a red light with the flag.

Do not place a derail or switch in the lockout position until red flag protection is in place. Do not remove the red flag protection until lockout protection is removed.

C. Common Authority

Common authority must be established. The person or persons in authority must:

- Communicate with all employees being protected by a red flag and lockout device.
- Control the red flag and the only keys to the lockout protection.
- Be responsible for the safety of all employees in the working area.

Do not work on the track or railroad rolling equipment until both ends of the track have a red flag and lockout protection.

D. Derails

Derails that are used in conjunction with worker protection must be in the derailing position with proper flag displayed only when their use is required for such protection. When their use

is not required for protection:

- Remove portable derails, then remove flag.
or
- Lock fixed derails in non-derailing position with an effective locking device, then remove (take down) flag.

System Special Instruction

81.23 Lockout Protection Required

Add the following:

D. Derails

Derails that are used in conjunction with worker protection must be in the derailing position with proper flag displayed only when their use is required for such protection. When their use is not required for protection:

- Remove portable derails, and then remove flag.
or
- Lock fixed derails in non-derailing position with an effective locking device, and then remove (take down) flag.

[^Top](#)

Updated: 4/29/2011

82.0: HANDLING SWITCHES AND DERAILS

- [82.1: Switches and Derails - Authority](#)
- [82.2: Operating Switch by Hand](#)
- [82.3: Switch Operation](#)
- [82.4: Defective Switches](#)
- [82.5: Spiked Switches](#)
- [82.6: Operating High/Low-Stand Switch](#)
- [82.7: Operating Lever-Action Switches](#)
- [82.8: Switch Point Locks](#)
- [82.9: Spring Switch](#)
- [82.10: Power Switch](#)
- [82.11: Switch Heaters](#)

82.1: Switches and Derails - Authority

Unauthorized persons must not unlock or handle switches or derails.

[^Top](#)

82.2: Operating Switch by Hand

When switch is to be operated by hand, equipment must not pass the following limits:

Trailing Point movement:

- Stop movement not less than 50 feet from switch points to prevent tension being placed on switch points and switch handle.

Facing Point movement:

- Stop movement a sufficient distance from switch points to prevent binding of switch points.

Facing point movement is moving into the switch points or making movement from the switch points into the body of the switch. Trailing point movement is moving through the switch in the opposite direction.

[^Top](#)

82.3: Switch Operation

Switches have different physical operating characteristics. Be familiar with the procedures for properly lining each type of switch. Always remember that the ease with which a switch operates will change depending on weather, temperature, maintenance, and other operating conditions.

Before operating a switch or derail:

1. Look in both directions and be alert for moving equipment on adjacent tracks.
2. Before lining the switch, visually inspect it, and make sure it is not damaged, locked, tagged or spiked and that points are not obstructed by ballast, ice, snow, or other material which may interfere with the normal movement of switch points.
3. If necessary to remove foreign material between the switch point and stock rail, use a broom, stick or similar object. Do not use your hand or foot for this purpose. If the switch is spiked, do not attempt to operate it.
4. Always take a firm stance and be alert for conditions which may cause loss of footing.
5. While handling a switch or derail, keep hands and feet clear to avoid being caught or struck by the switch lever handle or ball.

Note: See ***Rule 8.2, Position of Switches.***

[^Top](#)

82.4: Defective Switches

When any switch is found hard to operate, defective, or in need of maintenance, do the following:

- Take the switch out of service.
- Report the switch to the proper authority, including its exact location and problem.
- Tag the defective switch with a warning tag describing the defect.

The switch must remain out of service until an inspection and repairs can be completed.

[^Top](#)

82.5: Spiked Switches

Apply a "Switch Out of Service" tag to any inoperable switch or switch requiring maintenance. Spike switch when necessary.

CAUTION: Do not rely solely on tags for identifying spiked switches. Report the switches to a supervisor or train dispatcher.

[^Top](#)

82.6: Operating High/Low-Stand Switch

Do not use your feet to operate this type of switch or secure the handle.

CAUTION: The switch handle may be under compression and may swing around when released from the keeper slot.

When operating a high/low stand switch:

1. Lift up on the switch handle, keeping the body clear of handle movement.
2. Pull the handle slowly through its arc of travel. Expect that the switch may suddenly operate in either an easy or stiff manner. Always keep firmly braced and do not exert unnecessary force.
3. Do not jerk the handle and avoid placing the body in a twisted or awkward position. Reposition feet as necessary to maintain good body mechanics. Use leg muscles instead of back muscles.
4. When switch is in the desired position, fully insert the handle into the keeper slot.
5. Once the handle is down, secure it with a lock or hook, when available.

Use either the two-hand or the mast-support method to lift the lever handle out of the base.

Two-Hand Method

When using the two-hand method:

1. Stand facing the switch stand and place both hands near the end of the handle.
2. Lift up the switch handle, keeping your back as straight as possible and your legs slightly bent.

Mast-Support Method

When using the mast-support method:

1. Place one hand on the mast and the other hand on the end of the handle.
2. Stand parallel to the handle and slowly pull the handle through the line of travel.
3. After completing the move, stand as close to the handle as possible, leaving room for the handle to clear the body, and push the handle down.

[^Top](#)

82.7: Operating Lever-Action Switches

When operating a lever-action switch:

1. Take a firm stance and be alert for conditions that might cause loss of footing.
2. Stand parallel to handle movement, with your stance centered over the lever arm handle. If the switch is equipped with a foot latch, keep your foot on the latch until you move the lever toward the one-half position.
3. Hand or other object must not be used to release latch. The switch lever may be under compression and could fly up when released from the latch or keeper.
4. Stand as close as possible to the lever arm, placing one hand on your knee or on top of the switch staff for support.
5. Place your other hand on the handle and lift up slowly and smoothly.
6. Once the lever has traveled at least to the straight up position, reposition your feet and hands so that lever movement may be completed with a pushing motion.
7. On switches where movement is completed in close proximity to the ground, it is permissible to use one foot to complete the last 6 inches of movement, provided that good balance is maintained. Place one foot near the end of the lever and step down until the lever arm is latched.

CAUTION: Avoid using your feet to push the lever arm down during wet, ice, or snow conditions, or if oil, grease, or other such contaminants are present

[^Top](#)

82.8: Switch Point Locks

Switch point locks are installed on certain main track switches at the base of the rail and locked with a switch lock. Switches equipped with this device are identified by:

- A sign on the switch stand, or
 - The switch handle or bottom portion of stand painted yellow.
1. To disengage the device, remove the lock and depress the foot pedal with your foot. This must be done before attempting to throw the switch. Do not use your hands to depress the foot pedal.
 2. To reengage the device, snap the switch point lock into locking position by returning the switch to the normal position. Inspect to assure the locking position before putting your hands near the switch point lock or replacing the padlock. If the switch point lock fails to snap into locking position, reopen the switch and repeat the process.
 3. If defects exist:
 - Do not attempt to pull the pedal by hand or other means.
 - Contact the train dispatcher and report the switch point lock defective. Attach an out-of-service or warning tag to the switch.

[^Top](#)

82.9: Spring Switch

Do not manually operate a spring switch when springs are compressed by the wheels, except in an emergency. In an emergency, keep clear of the handle when it is released.

[^Top](#)

82.10: Power Switch

Take precautions to avoid injury when working on power-operated, remote or automatic control, or interlocking switches, derails, or movable point frogs.

- Keep hands and feet clear of connections.
- Do not place hands or feet between switch point and stock rail without first isolating the switch against remote operation.

[^Top](#)

82.11: Switch Heaters

Avoid contact with switch heaters or switch rails when heaters are operating.

[^Top](#)

Updated: 4/28/2010

83.0: INTERMODAL RAMP RULES

- [83.0: INTERMODAL RAMP RULES](#)
- [83.1: General Intermodal Ramp Rules](#)
- [83.1.1: Reflectorized Clothing](#)
- [83.1.2: Hearing Protection-Intermodal](#)
- [83.1.3: Protection of Loading and Unloading Operations](#)
- [83.1.4: Speed Limits in Yards](#)
- [83.1.5: Strobe Lights](#)
- [83.1.6: Live Equipment](#)
- [83.1.7: Overhead Lifting](#)
- [83.1.8: Lifting Arms](#)
- [83.1.9: Walkways](#)
- [83.1.10: Top Chords-Double Stack Cars](#)
- [83.1.11: Getting On and Off Cars](#)
- [83.1.12: Free Hands](#)
- [83.1.13: Standing on Platform](#)
- [83.1.14: Crossing Platforms](#)
- [83.1.15: Staying Clear of a Suspended Load](#)
- [83.1.16: Riding on Intermodal Equipment](#)
- [83.2: Trailer on Flat Car](#)
- [83.2.1: Trailer Doors](#)
- [83.2.2: King Pin](#)
- [83.2.3: Bogies/Chassis](#)
- [83.2.4: Electrical Wrenches](#)
- [83.2.5: Hitches](#)
- [83.3: Container on Flat Car/Double Stack-Securement](#)
- [83.3.1: Container Loading](#)
- [83.3.2: Chassis Stacks](#)
- [83.3.3: Side Spacers](#)
- [83.3.4: IBC Storage](#)
- [83.3.5: Securing Containers](#)
- [83.3.6: IBC Hammer](#)

83.0: INTERMODAL RAMP RULES

Note: This chapter governs all Union Pacific Railroad clerical employees and any employee whose duties may include working within or close to intermodal facilities.

[^Top](#)

83.1: General Intermodal Ramp Rules

[^Top](#)

83.1.1: Reflectorized Clothing

Reflectorized tear away vests, coveralls or t-shirts must be worn outside other clothing by all personnel who work directly on the Intermodal Facility.

[^Top](#)

83.1.2: Hearing Protection-Intermodal

Employees must wear hearing protection anytime they are within a radius of 25 feet of operating lift or transfer equipment. Hearing protection is not required for employees who are inside the cab with the cab doors and windows closed.

Groundmen must wear hearing protection while performing their duties. In all cases, hearing protection must be worn in compliance with the provisions of Safety Rule 71.2.

~~Properly approved hearing protection must be worn by all employees who work directly with lift equipment.~~

System Special Instruction

Change rule to read:

Employees must wear hearing protection anytime they are within a radius of 25 feet of operating lift or transfer equipment. Hearing protection is not required for employees who are inside the cab with the cab doors and windows closed.

Groundmen must wear hearing protection while performing their duties. In all cases, hearing protection must be worn in compliance with the provisions of Safety Rule 71.2.

83.1.3: Protection of Loading and Unloading Operations

Lock-out protection must be provided before loading and unloading activities begin.

A. Effective Lockout Protection

1. Line Switch

Line the switch away from movement or place a derail at least 150 feet (50 feet if track speed is 5 MPH) from end of rolling equipment and secure the switch or derail with an effective locking device. The derail or switch must be able to restrict access to the portion of track where work is being performed.

One Locking Device.

Use one locking device if the employees being protected:

- Are assigned to work together as a unit under a common authority.
- Communicate with each other while working.

Additional Locking Devices.

If more than one working group exists, the employees must communicate and apply an additional locking device to the derail or switch.

2. Display Red Flag

At each lockout position, display a red flag that can be clearly seen during the day. At night, display a red light with the flag.

Do not place a derail or switch in the lockout position until red flag protection is in place. Do not remove the red flag protection until lockout protection is removed.

3. Red Signal Readily Visible to Engineer

In addition to providing protection as required, before loading and unloading activities begin, when equipment is coupled to an engine or an engine is on the track being protected:

- A red signal (flag/light/tag) must be attached to the controlling engine and must be visible to the engineer or employee controlling the engine.
- On engines equipped for remote control operations, the control must be in manual. A red tag must be placed on the switch governing remote/manual operation.
- The engine with an attached red signal must not be moved.

4. Derails

Derails that are used in conjunction with worker protection must be in the derailing position with proper flag displayed only when their use is required for such protection. When their use is not required for protection:

- Remove portable derails, and then remove flag.
or
- Lock fixed derails in non-derailing position with an effective locking device, and then remove (take down) flag.

B. Common Authority

Common authority must be established. The person or persons in authority must:

- Communicate with all employees being protected by a red flag and lockout device.
- Control the red flag and the only keys to the lockout protection.
- Be responsible for the safety of all employees in the working area.

Do not work on the track or railroad rolling equipment until both ends of the track have a red flag and lockout protection.

~~Line the switch away from movement or place a derail at least 150 feet (50 feet if track speed is 5 MPH) from end of rolling equipment and secure the switch or derail with an effective locking device. The derail or switch must be able to restrict access to the portion of track where work is being performed.~~

~~**One Locking Device:**~~

~~Use one locking device if the employees being protected:~~

- ~~Are assigned to work together as a unit under a common authority.~~
- ~~Communicate with each other while working.~~

~~**Additional Locking Devices:**~~

~~If more than one working group exists, the employees must communicate and apply an additional locking device to the derail or switch.~~

~~**B. Red Flag**~~

~~At each lockout position, display a red flag that can be clearly seen during the day. At night,~~

~~display a red light with the flag.~~

~~Do not place a derail or switch in the lockout position until red flag protection is in place. Do not remove the red flag protection until lockout protection is removed.~~

~~C. Common Authority~~

~~Common authority must be established. The person or persons in authority must:~~

- ~~• Communicate with all employees being protected by a red flag and lockout device.~~
- ~~• Control the red flag and the only keys to the lockout protection.~~
- ~~• Be responsible for the safety of all employees in the working area.~~

~~Do not work on the track or railroad rolling equipment until both ends of the track have a red flag and lockout protection.~~

System Special Instruction

Change rule as follows:

Lock-out protection must be provided before loading and unloading activities begin.

A. Effective Lockout Protection

1. Line Switch

Line the switch away from movement or place a derail at least 150 feet (50 feet if track speed is 5 MPH) from end of rolling equipment and secure the switch or derail with an effective locking device. The derail or switch must be able to restrict access to the portion of track where work is being performed.

One Locking Device.

Use one locking device if the employees being protected:

- Are assigned to work together as a unit under a common authority.
- Communicate with each other while working.

Additional Locking Devices.

If more than one working group exists, the employees must communicate and apply an additional locking device to the derail or switch.

2. Display Red Flag

At each lockout position, display a red flag that can be clearly seen during the day. At night, display a red light with the flag.

Do not place a derail or switch in the lockout position until red flag protection is in place. Do not remove the red flag protection until lockout protection is removed.

3. Red Signal Readily Visible to Engineer

In addition to providing protection as required, before loading and unloading activities begin, when equipment is coupled to an engine or an engine is on the track being protected:

- A red signal (flag/light/tag) must be attached to the controlling engine and must be visible to the engineer or employee controlling the engine.
- On engines equipped for remote control operations, the control must be in manual. A red tag must be placed on the switch governing remote/manual operation.
- The engine with an attached red signal must not be moved.

4. Derails

Derails that are used in conjunction with worker protection must be in the derailing position with proper flag displayed only when their use is required for such protection. When their use is not required for protection:

- Remove portable derails, and then remove flag.
or
- Lock fixed derails in non-derailing position with an effective locking device, and then remove (take down) flag.

B. Common Authority

Common authority must be established. The person or persons in authority must:

- Communicate with all employees being protected by a red flag and lockout device.
- Control the red flag and the only keys to the lockout protection.
- Be responsible for the safety of all employees in the working area.

Do not work on the track or railroad rolling equipment until both ends of the track have a red flag and lockout protection.

[^Top](#)

83.1.4: Speed Limits in Yards

Ramp tractors must be operated at a safe speed and observe stop signs. Other vehicles must observe posted speed limits and stop signs.

[^Top](#)

83.1.5: Strobe Lights

All vehicles equipped will have headlights on and dimmed and four-way flashers on while operating. In addition, company and contractor vehicles assigned to the ramp, including ramp tractors and lift equipment, will display illuminated amber strobe lights.

[^Top](#)

83.1.6: Live Equipment

Employees on the ground must maintain a sufficient distance from tractors, trailers, or any other equipment standing or moving.

[^Top](#)

83.1.7: Overhead Lifting

At points where side loaders or cranes are used, do not walk between the trailer and flat car during any step of the loading or unloading cycle, except to raise or lower landing gear after all other movement has stopped.

[^Top](#)

83.1.8: Lifting Arms

Groundmen must stay clear of lifting arms at all times. Do not go under a suspended trailer or container. When groundmen are utilized, they must be in the operator's view at all times when the operator is moving the side loader, crane or maneuvering the lift arms. If groundmen disappear from view, all movement must stop until visual contact is restored.

[^Top](#)

83.1.9: Walkways

Walk only on the walkways provided. Do not walk on painted metal surfaces on the top of cars, except while applying or removing handbrake when the car is standing.

[^Top](#)

83.1.10: Top Chords-Double Stack Cars

Do not walk on top chords of Double Stack cars.

[^Top](#)

83.1.11: Getting On and Off Cars

Employees are permitted to get on and off standing articulated Intermodal cars by stepping on the truck bolsters provided:

1. The track is known to be protected by blue flags, and
2. The truck bolster is seen to be free of debris and moisture, and
3. The employees hands must be free while getting on or off cars.

[^Top](#)

83.1.12: Free Hands

Hands must be free while getting on or off cars.

[^Top](#)

83.1.13: Standing on Platform

Do not stand on a platform or well of a car while that same platform or well is being loaded or unloaded.

[^Top](#)

83.1.14: Crossing Platforms

Cross from platform to platform using the walkways provided, but do not cross from car to car

over the drawbars.

[^Top](#)

83.1.15: Staying Clear of a Suspended Load

Working, standing or walking under a suspended load is prohibited. Keep hands and feet clear of a suspended load.

[^Top](#)

83.1.16: Riding on Intermodal Equipment

Unless authorized, only the operator may ride in/on Intermodal Equipment, Packer or Crane while unit is moving.

[^Top](#)

83.2: Trailer on Flat Car

[^Top](#)

83.2.1: Trailer Doors

Close and secure trailer doors before moving or loading a trailer onto a flat car.

[^Top](#)

83.2.2: King Pin

While a trailer is being loaded, tie-down employees must visually inspect the trailer king pin to ensure that it is properly seated and secured in the hitch and that the diagonal strut is locked in the upright position, as evidenced by the hitch-lock indicators.

[^Top](#)

83.2.3: Bogies/Chassis

Before loading trailers with detachable bogies, make sure the pins securing the bogies to the trailer body are in place and locked. Before loading a container/chassis assembly, ensure that all chassis locks are in place and secure. Do not park bogies where they will protrude into roadways or where they are hazardous to passing vehicles or equipment.

[^Top](#)

83.2.4: Electrical Wrenches

Employees must ground electric screw wrenches properly. Extension cords must be no longer than 89 feet.

Wear rubber gloves when operating electrical wrenches in wet conditions.

Note: See **Rule 78.2, Electrical Cords.**

[^Top](#)

83.2.5: Hitches

Tie-down employees must stay clear of the diagonal strut of “pull-up” hitches to avoid injury in case the hitch is knocked down inadvertently. Do not manually open hitch jaws until ensuring that the diagonal-strut indicator shows “locked.”

To lower a knockdown hitch properly, complete these steps, making sure to stand clear of the stanchion:

1. Stand on either side of the stanchion with your legs positioned to give solid support.
2. Using a sledge hammer, strike the unlocking knockdown lever located between the upper diagonal struts.
3. Make sure this action causes the knockdown lever to retract the diagonal locking plunger, causing the stanchion to fall.

If this procedure fails, “bad order” the hitch until a railroad maintenance employee repairs the hitch and returns it to service.

Do not use a pry bar to force the hitch down. Also do not place a bar between the locking plunger and the locking plate to try to retract the locking plunger

Anytime a locking mechanism does not work freely and requires excessive force, “bad order”

the hitch and have it repaired before using the mechanism again.

[^Top](#)

83.3: Container on Flat Car/Double Stack-Securement

[^Top](#)

83.3.1: Container Loading

When containers without chassis are loaded on flat cars, inspect the containers and make sure all corners are secured and locked in the corner castings. When loading double stack cars, make sure the container interbox connectors are locked in the proper position.

Before releasing stack cars to be moved from the ramp, stow the interbox connectors in storage boxes.

[^Top](#)

83.3.2: Chassis Stacks

To secure the arms in the chassis stacks, complete these steps:

1. Center the mast over the chassis stack.
2. Lower the arms until the foot pads are below the bottom chassis.
3. Make sure the arms are lined between the tandems at each end.
4. Obtain four chains that are 12 feet long and made of 1/2 -inch alloy steel. Make sure the chains have a certified working rating of 11, which is 200 pounds or better.
5. Wrap one end of the chain completely around the arm just above the foot pad and hook the chain in place.
6. Take the other end of the chain and wrap it around the bottom chassis frame, pull the slack out of the chain, and hook the chain in place.
7. Repeat steps 5 and 6 on the other three arms.

[^Top](#)

83.3.3: Side Spacers

On Platform equipped with side spacers, the side spacers must be in the down position before

loading 96 inch wide containers, and in the up position before loading 102 inch wide containers.

[^Top](#)

83.3.4: IBC Storage

Interbox Connectors (IBC) will be stored in the IBC box provided on each platform of a double stack car. IBC's must not be left on walkways or stored other than in the IBC box.

[^Top](#)

83.3.5: Securing Containers

Double stacked containers must be loaded using four (4) IBC's. All four (4) IBC's must be locked for the container to be secure. All containers that are positioned in a double stack car (bottom well loading only) shall have IBC's removed from the top of container before car is released for movement.

[^Top](#)

83.3.6: IBC Hammer

Use an approved IBC Hammer when locking or unlocking IBC's with short handles.

[^Top](#)

Updated: 4/28/2010

90.0: POLICIES AND PROGRAMS

- [90.1: Drug and Alcohol Policy](#)
- [90.2: Bloodborne Pathogens Policy](#)
- [90.3: Smoking Policy](#)
- [90.4: Medical Rules](#)

90.1: Drug and Alcohol Policy

("In Part") (Effective April 15, 2004)

The purpose of the Union Pacific Drug and Alcohol Policy is to ensure compliance with applicable federal regulations and to establish policies, priorities, and objectives for the company's drug and alcohol control program. Compliance with the requirements of this policy is a condition of employment at Union Pacific.

Union Pacific prohibits any illegal use of a controlled substance, and any possession, use of, or impairment by alcohol when any employee is subject to duty, reporting for duty, on duty, or on Union Pacific property.

If an employee is in doubt as to whether an over-the-counter or prescription drug may have an adverse effect on alertness, coordination, reaction, response, or safety, the employee should take the following steps:

1. The employee's treating medical practitioner or any other medical practitioner who has evaluated the individual should make a good faith judgment in writing, with notice of the employee's assigned duties and on the basis of the available medical history, that the use of the substance by the employee at the prescribed or authorized dosage applicable is consistent with the safe performance of the employee's duties. A copy of this documentation must be available upon request; and
2. The substance must be used only in the manner and dosage, and for the purpose prescribed or authorized; and
3. In the event an employee is treated by more than one medical practitioner, at least one treating medical practitioner should be informed of all medications authorized or prescribed and should make a good faith judgment, in writing, that the combination of medications is consistent with the safe performance of the employee's duties. The

employee must observe any restrictions imposed with respect to use of medications in combination.

Note: Every employee must recognize that the unauthorized use of another person's prescription is illegal and may cause a positive test result which would be a violation of Union Pacific's drug and alcohol testing policy.

The conduct of any employee leading to conviction of any misdemeanor or felony involving the unlawful use, possession, manufacture, distribution, dispensation, or transportation of any illegal drug or controlled substance is prohibited.

Employees convicted of any such misdemeanor or felony must notify their supervisor of that fact no later than the end of the first business day immediately following the day the employee receives notice of the conviction.

Certified locomotive engineers and remote control operators, whatever class of service, i.e., including hostlers, must report to the EAP any conviction for operating a motor vehicle while under the influence of or impaired by alcohol or a controlled substance. Report must be made either to the National Employee Assistance Help Line, (800) 779-1212, or to their supervisor, within forty-eight hours of the conviction.

Driving a motor vehicle owned, leased, or rented by the company, while under the influence of alcohol and drugs, both on or off Union Pacific property and both on or off duty, is prohibited. Any employee arrested, ticketed, or convicted for driving a motor vehicle owned, leased, or rented by the company under the influence of alcohol and / or drugs, must notify a supervisor as soon as possible, but no later than the end of the first business day immediately following the day the employee is arrested, ticketed, or convicted.

Union Pacific permits off-duty employees subject to duty, or called for duty, to layoff with an admission that they are under the influence of alcohol or drugs (illegal or legal).

All DOT certified drivers, including CMV operators, must notify a supervisor when their license has been revoked, suspended or withdrawn for any reason, including drug or alcohol-related revocations, within forty-eight hours.

[^Top](#)

90.2: Bloodborne Pathogens Policy

Certain human bloodborne diseases, such as Hepatitis B and HIV (the virus that causes AIDS) can transfer from one human being to another in the workplace. This transfer occurs if

workers are exposed to infected blood, bloody materials, or certain internal bodily fluids.

Note: Current evidence indicates that these diseases cannot be transmitted by urine, sweat, tears, nasal secretions, saliva, or feces unless blood is present.

A. Actions that Cannot Transfer the Diseases

Current evidence indicates that employees cannot contract these bloodborne diseases by casual or social contact, such as:

- Shaking hands
- Hugging or kissing
- Crying
- Coughing
- Sneezing
- Sharing bed linens or towels
- Sharing eating utensils, or
- Sharing use of telephones, doorknobs, or tools

B. Actions that Prevent Contracting the Diseases

To minimize the risk of contracting bloodborne diseases in the workplace, employees should comply with the following guidelines:

1. Wear latex or vinyl gloves when directly handling human blood, bloody materials, or bloody bodily fluids. After finishing, carefully remove gloves and wash hands thoroughly with hot water and soap.

Glove Availability. Appropriate gloves are available in supply or in company first aid kits. However, if a serious first aid incident occurs and gloves are not available, minimize exposure by using a heavy cloth or padding when responding to the injury.

2. Wear vinyl or latex gloves when cleaning up human blood from equipment or work areas. Use a 10-to-1 solution of tap water and regular bleach to clean the equipment or areas.
3. If using syringes/needles to self-administer allergy or insulin shots, do not dispose of the used needles in company trash containers, share the needles with other employees, or discard the needles on company property.

C. Possible Exposure Occurs

If another person's blood is transferred to an employee on duty by entering a break in the

employee's skin (rash, cut, abrasion, etc.) or entering a mucous membrane (mouth, nose, eyes), the exposed employee must report the incident within 72 hours. Employees must report the incident to the Health Services Department for any required evaluation and follow-up.

Employees do not need to report the incident if they are exposed to limited amounts of blood as follows:

- The exposed employee does not have a skin break in the exposed area.
- There was no puncture wound, or
- Another person's bloody fluids do not splash or transfer into the exposed employee's nose, mouth, or eyes.

[^Top](#)

90.3: Smoking Policy

(Policy effective July 1, 2005)

What Is It?

The purpose of this policy is to provide employees on Union Pacific Railroad Company with a work environment free from the potentially harmful effects of tobacco use.

Why Was It Written?

Union Pacific Railroad Company intends to provide employees with a smoke-free work environment. This policy has been implemented because of the potentially harmful effects of tobacco use, in response to employee health concerns, and at the direction of senior management.

What Are The General Provisions?

Smoking is prohibited at the following locations and activities:

- All Company property, whether owned or leased, including mechanical facilities, along the right-of-way, in office buildings, and all service unit facilities and yards.
- In or near building entrances and contiguous sidewalks.
- In locomotive cabs, cabooses, bunk cars, company vehicles, and similar equipment.
- Meetings held at off-site locations.

Cessation Programs

Programs are available for employees who desire to quit smoking. Interested employees should contact the Health Promotion Staff at (402) 544-2442 or toll-free at (888-767-0169). Information is also available on the [Wellness Programs Health Track Page Tobacco Cessation](#)

[Options](#) page.

<https://employees.www.uprr.com/emp/ec/health/tobaccocessation.htm>

Non-Compliance

Failure to comply may result in the assessment of discipline.

For Further Information

- Questions concerning compliance with the Smoking Policy should be referred to your immediate Supervisor.
- Contact the Company Values Line at 1-800-998-2000.
- Contact the HR Customer Service Representative for your department.

General Order

90.3 Smoking Policy

Change "Cessation Programs" information to read:

Programs are available for employees who desire to quit smoking. Interested employees should contact the Health Promotion Staff at (402) 544-2442 or toll-free at (888-767-0169). Information is also available on the Wellness Programs [Tobacco Cessation Options](#) page.

<https://employees.www.uprr.com/emp/ec/health/tobaccocessation.shtml>

[^Top](#)

90.4: Medical Rules

The Medical Rules are established to determine employees' Fitness-for-Duty. Health and Medical Services determines "Fitness for Duty" as the medical and functional, (i.e., physical, mental, and cognitive) ability to:

- Safely perform a job, with or without reasonable accommodations, and
- Meet medical standards established by regulatory agencies in accordance with federal and state laws.

The Medical Rules apply to post-offer applicants and all employees. Application of these rules is based on regulatory requirements and safety standards established by Union Pacific.

[Medical Rules](#)

Issued 3/1/2011

Latest 3/1/2011

Reviewed 3/1/2011

[^Top](#)

Updated: 3/01/2011

Glossary

- [Glossary](#)

Glossary

Authorized

The supervisor of an authorized employee has assured that the person under their direction has been qualified and is competent to perform their required work in a safe manner. Authorization in any other manner requires approval from another qualified person.

Body Mechanics

Movement and positioning of the human body. A person that uses good body mechanics properly positions their body or parts of their body in relationship to tasks being performed, stabilizes movement, maintains good footing and grip, and avoids placing undue stress or strain on muscles, ligaments, and joints.

Fouling a Track

Placement of an individual or a piece of equipment in such proximity to a track that the individual or equipment could be struck by a moving train or on-track equipment, or in any case is within 4 feet of the field side of the near running rail.

Fumes

Minute solid particles arising from the heating of a solid.

Gases

A state of matter which diffuses with other gases, uniformly distributes itself when in a container and changes state as a result of changes in pressure and/or temperature.

Groundman

The person assigned to assist an operator in assuring a safe operation. This is the designated person to give signals.

Licensed

Person has completed appropriate training and passed required examinations.

Operator

The person at the controls of a tool, machine or piece of equipment.

Periodic Inspection

Inspection conducted as required based on usage of equipment, severity of service conditions, experience gained as to need, but at least annually.

Qualified

Person has been trained and instructed to perform the work in a competent and safe manner.

Red Zone

Anytime an employee is working within an area where there is the potential to be struck by moving equipment, when required to work on under or between equipment, when working with or around machinery or when entering control operator/train dispatcher work stations.

Toxic

A substance that can potentially cause harm to the body.

Vapors

The gaseous form of substances which are normally in a solid or liquid state.

Work Activities (working on the ground)

TE & Y employees performing duties such as walking between adjacent parallel tracks, switching, inspecting, testing, repairing, or servicing equipment or components etc. Activities such as walking to and from a train, which would include getting on and off the locomotive, crew van or yard office, is not considered a work activity.

System Special Instruction

Add:

Red Zone

Anytime an employee is working within an area where there is the potential to be struck by moving equipment, when required to work on under or between equipment, when working with or around machinery or when entering control operator/train dispatcher work stations.

Work Activities (working on the ground)

TE & Y employees performing duties such as walking between adjacent parallel tracks, switching, inspecting, testing, repairing, or servicing equipment or components etc. Activities such as walking to and from a train, which would include getting on and off the locomotive, crew van or yard office, is not considered a work activity.

[^Top](#)

Updated: 7/23/2010

Index

- [Index](#)

Index

(by Rule Number)*

*if word identifies with a main rule subsequent subrules will not be listed

A

Adjacent Track 77.10, 81.1.2, 81.8, 82.3

Aerial Basket 77.9, 80.23

AIDS 90.2

Air Contaminants 70.21

Air Dump Car 81.14

Air Nozzle 70.15

Aisle 80.1, 80.18

Alloy Steel 77.23.3, 83.3.2

American National Standards Institute (ANSI) 71.5.1, 71.7

Angle Cock 81.13.7, 81.13.8

Anvil 76.46

Authorized 70.7.6, 70.14, 73.1, 74.2, 74.7, 74.17, 75.11, 76.27, 76.35, 76.38, 77.1, 78.1, 78.8, 78.10, 79.1, 79.16.4, 79.28, 81.4.2, 81.18, 83.1.16, 90.1, Glossary

B

Bar 76.9, 76.11, 76.18, 76.19, 76.20, 76.22, 79.13, 81.11, 83.2

Barrel 70.25, 75.9, 79.8, 80.11, 80.14

Batteries 70.11, 71.5.2, 72.12, 74.18 through 74.20

Bell 81.10.3, 81.21.1

Binder 75.8

Bloodborne diseases 90.2

Blow Pipe 79.18.2

Board 70.12, 78.9, 80.12, 80.21, 80.22, 81.17

Body Mechanics 81.11, 81.13.6, 81.15, 82.6, Glossary
Bogies 83.2.3
Boiler 79.7.1
Bolster 83.1.11
Boom 75.7, 77.4, 77.6.2, 77.8, 77.15, 77.16, 77.19.1, 78.6, 78.7, 78.7.1
Boring Mill 76.7
Brake Step 81.11
Brake Wheel 81.11
Bridge Plate 81.17
Bucket 77.3, 77.10, 77.19.7
Building (Office) Safety 70.7

C

Cables,
 Jumper 74.20
Crane 77.8, 77.12, 77.19.1
 Arc Welding 79.11, 79.21 through 79.25
Caboose 70.18, 76.10, 81.7, 90.3
Cadweld Bonds 79.28
Capacity 70.1, 75.2, 75.7, 75.11.3, 76.23, 77.14, 79.24, 80.12
Caps 73.6, 74.19, 79.8, 79.14
Car Mover 81.10
Catalytic Converter 72.20
Center Pin 76.24
Chain Saw 71.2.6, 76.36
Chains 74.15, 75.8, 76.13, 77.8, 77.12, 77.13, 77.20, 77.23, 79.14.2, 81.7.6, 81.11.1, 81.20, 83.3.2
Chassis 83.2.3, 83.3
Chemicals 70.24, 71.3, 71.5.2
Chock 75.7, 76.24, 81.12
Clamp 76.13, 76.43, 77.19.7, 79.24, 79.25
Clearance 74.6, 74.15, 74.17, 75.9, 75.11.3, 78.6, 78.7, 78.8, 81.4.1, 81.7.4, 81.8, 81.10.3
Clothing 70.15, 70.18, 70.19, 70.23, 71.1, 71.6, 76.13, 78.5, 79.2.3, 79.9, 79.25, 81.11.1, 83.1.1
Combustible Material 70.19, 72.3, 72.8, 72.12, 72.14, 72.16, 79.14, 79.17.1
Compressed Air 70.15, 71.2.6, 79.9
Confined Space 70.20, 79.3.3, 79.7
Connections 72.6, 74.20, 76.29, 76.30, 77.19, 77.26, 79.10, 79.14.1, 79.15.2, 79.16.1, 79.17, 79.22, 79.23, 81.13.8, 81.17, 82.10
Contact Lenses 71.5.2
Containers 70.11, 70.18, 70.24, 70.25, 71.7, 72.14, 72.15, 72.17.1, 72.13, 75.4, 76.15, 79.8,

83.1.8, 83.2.3, 83.3, 90.1, Glossary
Contaminated 70.21 through 70.23
Conveyer 81.17
Copper 76.10, 79.23
Coupler 76.23, 81.13
Coupler Alignment Strap 81.13.5
Crane 74.8, 76.24, 77 section, 78.7, 79.14.2, 81.7.7, 81.16, 81.18, 83.1.7, 83.1.8, 83.1.16
Criminal Activity 70.10
Cushioning Devices 81.6, 81.13.2
Cutter 70.7.3, 76.9, 76.10, 76.13, 76.15
Cylinders 72.19, 79.4, 79.8, 79.11, 79.12, 79.14, 79.16

D

Department

Car 71.7.2, 71.7.3, 75.22, 81.4, 81.7, 81.18
Engineering 71.7.3, 81.4
Health Services 90.2
Intermodal 71.7.1, 81.4, 83 section
Locomotive 71.7.3, 76.22, 81.4
Safety 71.1, 71.2.1, 80.11
Supply 71.7.3
Telecommunications 71.7.1
Transportation 1.7.2
of Transportation (DOT) 73.2, 74.2.1, 74.13, 79.14.3
Department Head 71.4, 71.5
Departmental Instructions 70.2, 76.1, 77.21.3, 79.3.3, 79.5, 80.23
Derails 82 section, 83.1.3
Derrick 77.9, 79.14.1
Diagonal-strut 83.2.2, 83.2.5
Dies 76.46
Distance 70.22, 75.2, 76.45.3, 77.19.3, 78.6, 78.7.2, 78.8, 79.14.1,
80.8, 80.14, 80.21, 81.2.2, 81.10, 82.2
Specific Applications,
20 foot 72.17.1, 79.14.1, 81.2.2
50 foot 72.12, 72.17.2, 81.2.2, 81.13.3, 81.13.4, 81.13.5, 82.2
150 foot 71.2.3, 71.2.5, 83.1.3
Ditcher 81.7.7
Ditches 80.5
Dollies 75.3
Doors,
General 70.6, 71.2, 72.4, 74.14, 75.11, 3, 80.18, 81.20, 81.21.3

Railroad Car 79.3.2, 81.1.2, 81.7.6, 81.9, 81.14, 81.15, 81.17

Trailer 83.2.1

Double Stack 83.1.10, 83.3

Dragline 81.18

Drill 76.7, 76.10, 76.44

Driver's License 74.2

Drum Fastening 77.19.6

Drums 70.25, 72.15, 75.9, 79.8

Dry Chemical 72.8

Dual Ear Protection 71.2

Dump Door 81.14

Dust 70.15, 70.21, 71.5.2, 79.6, 79.9

E

Ear Muffs 71.2.3

Ear Plugs 71.2

Effective Locking Device 83.1.3

Electric Arc 71.5.1, 74.19

Electric Magnet 79.14.2

Electric Panels 75.2, 78.3, 78.5, 78.10, 81.20

Electrical Cords 70.7.5, 76.30, 78.2

Electrical Tools 71.2.6, 72.17, 73.3, 76.30, 76.31, 78.2, 83.2.4

Electrical Welding Equipment 71.2.6, 79.0, 79.2, 79.7, 79.14.2, 79.20 through 79.27

Electrode 79.14.2, 79.21, 79.22, 79.25, 79.26

Emergency 78.2, 74.3, 74.13, 76.10, 78.9, 79.3.2, 79.16.1, 81.4.2, 82.9

Emergency Brake 74.14, 74.20

Emergency Eye Wash 74.19, 75.2

Emergency Response 70.22, 79.3.3, 79.7.1

Emergency Stop Signals 77.7

End Sill 81.13.2

Energized Circuits 70.14, 72.8, 78.1, 78.4, 78.5, 78.7.1, 78.9, 80.12, 80.16

Environmental Law, Policies and Procedures Manual 70.25, 72.0, 72.17

Excessive Force 70.1, 81.13, 81.15, 83.2.5

Exhaust 70.21.1, 72.20, 79.7

Explosive 71.5.2, 73 section, 79.3.3, 79.8

Eye Protection 71.5, 76.36, 79.2.1

F

Face Shield 71.5.2, 79.2.1, 79.28

Fall Protection 80.23
Falling Object 71.7, 75.5, 76.5, 80.10, 80.19, 81.1.2, 81.7.3, 81.15, 81.16, 81.17, 83.2.5
Federal Motor Carriers Safety Regulations 74.2.1
Files 76.16, 76.17
Filter Lenses 79.2.1
Fire,
 Alarm 72.1
 Classes of 72.8
 Codes 72.7, 72.11
 Escape or Exit 72.22, 72.5
 Extinguisher 72.1, 72.7, 72.8, 75.2, 76.36, 79.3
 Hazard 72.6, 76.36, 79.3, 79.22, 79.26
 Hose 79.3
 Prevention 70.16, 70.18, 72 section, 73.3, 75.2, 79.2.3, 79.3, 79.8, 79.10
 Protection Devices 72.7
 Stops 72.4, 79.14.1
Fire-Fighting 72.1, 72.5, 92.9, 79.3.2
Flammable Materials 72.20, 79.8, 79.11, 79.14.1
 (also see Combustible Materials)
Flashlights 72.17, 73.3, 78.5
Flat Car 77.8, 77.16, 81.7.4, 83.2, 83.3
Floor 70.7.6, 70.11, 70.18, 75.6, 75.7, 75.11.3, 76.24, 78.2, 78.3, 79.25, 80.2, 80.21, 81.20, 81.21.3
Foot Latch 82.7, 82.8
Footing 75.1, 76.11, 76.19, 76.23, 76.26, 76.36, 77.12, 80.1, 80.2, 80.14, 80.22, 81.4, 81.5, 81.7.1, 81.7.4, 81.11, 81.13, 81.20, 82.3, 82.7, Glossary
Footwear 71.7, 80.2, 81.4.1
Forklift 74.8, 75.2, 75.11
Fouling 0.5.1, 74.6, 74.17, 77.10, 81.1.1, 81.1.3, 81.2.2, 81.8, **(also see Clearance)** 82.3, Glossary
Four-Way Flasher 83.1.5
FRA requirements 71.7, 79.3.2
Frog 81.2.1, 82.10
Fuel Gas 79.0, 79.7.1, 79.14 through 79.18
Fueling 71.2.1, 71.5.2, 72.17, 76.28, 81.22
Fumes 70.21, 79.6, 79.7, Glossary
Fuses 73.4, 78.1, 81.21.2
Fusee 70.18, 70.19

G

Gang Plank 75.5

Gases 70.13, 70.15, 70.21, 71.2.6, 72.6, 72.8, 72.13, 72.20, 74.13, 79.0 through 79.19,
Glossary
Gasoline 70.23, 72.6, 72.8, 72.15 through 72.18, 74.13
Gauges 79.14.8, 79.15.1, 79.16.1
Glad-Hand 81.13.7
Gloves 71.3, 75.10, 76.36, 76.45.3, 79.2.4, 79.14.1, 90.2
 Voltage Rated 78.4, 83.2.4
 Welding 76.45.3, 79.2.3, 79.10, 79.25
Grab Iron 70.6, 81.3, 81.4.2, 81.7.4.1, 81.20, 81.21.1
Grade Crossings 70.8, 74.12
Grinding 71.5.2, 76.45.3
Grit Blasting 61,2,1
Gross Vehicle Weight (GVW) 74.2.1, 74.5
Ground Cable 79.21, 79.22, 79.24
Ground Relay 81.21.2
Grounding Prong 76.30, 78.2
Groundman 77.4, 77.5, 77.6, 77.8, 78.7.2, 81.10.2, 83.1.8, Glossary
Guardrail 81.2.1

H

Halon 72.8
Hammers 71.5.2, 76.10, 76.14, 76.46, 79.16.1, 79.18.1, 83.2.5, 83.3.6
Hand Brake 75.11.3, 81.7.1, 81.10.3, 81.11, 81.13.5
Hand Hold 76.5, 77.1, 81.3, 81.4.1, 81.5.1, 81.7, 81.11
Hand Signals 70.19, 77.6, 81.10
Hard Hat 71.4, 80.10
Hasp 81.9
Hazard Communication
 Standard 70.24, 79.3.3
Hazardous Material 70.22, 74.2.1, 74.13, 79.3.3
Headlights 74.10, 81.10.3, 83.1.5
Hearing Protection 71.2, 76.36, 79.2.3, 83.1.2
Heater, Switch 82.11
Hepatitis B 90.2
Hitches 74.15, 77.23.4, 83.2.2, 83.2.5
HIV 90.2
Hollow Casting 79.8
Hooks 77.12, 77.17, 77.19.7, 77.21.3, 77.23, 80.15, 82.6, 83.3.2
Hoses 70.15, 72.17, 74.8, 76.4, 76.13, 76.29, 79.3, 79.4, 79.11, 79.14.4, 79.16.2, 79.17, 81.13
Hot Slag or Metal 79.2.3, 79.11, 79.12, 79.28
Housekeeping 70.11, 72.3, 74.5, 80.1, 81.22

Humping 71.2.3

I

Inert Gas 79.7.1, 79.8

Inspect 70.13, 72.7, 72.21, 74.8, 74.15, 74.16, 74.17, 74.18, 75.1.1, 75.6, 75.7, 75.8, 75.11.1, 75.11.2, 76.2, 76.11, 76.22, 76.30, 76.45.1, 77.2, 77.13, 77.15, 77.19.2, 77.19.5, 77.21, 77.22, 77.23, 77.24, 77.27, 78.2, 79.3.3, 79.5, 79.17.1, 80.12, 81.3, 81.10.3, 81.11, 81.15, 81.16, 81.18, 81.21, 82.4, 83.2.2, 83.3.1, Glossary

Interbox Connector 83.3.1, 83.3.4

Interlocking 82.10

Intermodal Operations 71.7, 81.4, 81.7.4, 83 section

Internal Combustion 70.21.1, 72.20

J

Jacks 71.2.6, 75.7, 76.22, 76.23, 76.24

Jet Blower 71.2.5

Jewelry 71.6, 78.5

Job Briefing 70.3, 72.12, 75.1.2, 79.3.2, 81.5, 81.10

Joiner 71.2.6, 76.42

Jump Starting 71.5.2, 74.20

K

Knuckle Height 75.1.1

Knuckle-Mate 81.13.4

Knuckles 81.5.1, 81.6, 81.13

L

Ladders 72.5, 76.5, 80.10 through 80.20, 81.3, 81.4.1, 81.7.1, 81.75, 81.11, 81.20

Lathe 76.7, 76.44

Leading End 81.4.2

Lever 75.8, 76.5, 76.8, 76.18, 76.19, 76.22, 81.11, 82.3, 82.6, 82.7, 83.2.5

License 74.2

Lifting Arm 83.1.8

Lifting Technique 75.1

Lighter 73.4, 79.2.4, 79.18.2

Lighting, Level of 71.5.2, 80.6
Liquefied Petroleum
 Gas (LPG) 72.12, 72.13, 72.14.1, 72.17.2
Lines, Power 78.1, 78.6, 78.7, 78.8
Load Dividers 81.16
Load Testing
 For Lifting Devices 77.20.3
Locomotive 71.2.1, 81.20
Loading and Unloading 71.7, 75.5, 75.6, 75.7, 81.17, 81.18, 83.1 through 83.3
Lockout/ Tagout 70.5.1, 76.39, 78.10

M

Magnet 77.3, 79.14.2
Main Generator 81.21
Manhole 70.20, 80.5
Manifold System 79.16.2
Manufacturer's Instruction 70.26, 71.2, 74.17, 75.7, 76.1, 76.2, 76.3, 76.35, 76.36, 76.39, 77.1, 77.19, 77.23, 79.1, 80.22
Master Clutch 77.5
Matches 73.4, 79.2.3, 79.14.1, 79.18.2
Mechanical Assist Device 75.1
Movable Center Sill 81.13.2
Movable Point Frog 82.10
Moving Equipment 74.17, 80.2, 81.1, 81.2.2, 81.4, 81.7, 81.10, 82.3

N

Nail Gun 71.2.6, 76.34, 76.35
Natural Gas 79.18, 79.19
Noise 71.2
Nominal Diameter 77.19.2, 77.19.3
Nonconducting Agents 72.8

O

Office Safety 70.7
Operator 74.2, 74.17, 75.2.1, 75.11, 75.36, 76.45.3, 77.5, 77.6, 77.7, 77.10, 77.11, 77.14, 77.16, 78.7.2, 78.7.3, 79.16.2, 81.10, 81.16, 83.18, Glossary
Orange Cones 78.7.3

Occupational Safety & Health Administration (OSHA) 70.24, 71.7, 75.7, 83.1.3
Outfit Car 72.17.2, 72.18
Outrigger 77.13, 80.22
Oxyacetylene 79.2.1
Oxygen 74.13, 79.0, 79.7.1, 79.9, 79.10, 79.14 through 79.18

P

Pallets 75.2
Parking 72.7.1, 74.6, 74.14, 75.11.3, 75.11.4, 83.2.3
Passengers 74.7, 74.8, 74.9, 74.12, 81.7.6
Passing Train 77.10, 81.1.2
Pawl 76.22, 81.11
Periodic Inspection 77.2, 77.19.5, 77.22.1, 77.24.1, Glossary
Permits 72.11, 74.2
Personal Protective Equipment (PPE) 70.21, 71 section, 76.1
Pile Driver 71.2.5
Pin 76.11, 76.14, 76.22, 76.24, 76.29, 76.32, 77.23.3, 81.13, 83.2.2, 83.2.3
Pinch Points 70.5, 76.22, 81.12, 81.13, 81.16
Pipe 76.8, 76.13, 79.18.2, 81.73
Piston Head 79.8
Pits 70.20, 75.2, 80.5, 80.8
Pitting 77.23.2, 76.2
Placard 74.2.1, 74.12, 77.14
Planer 71.2.6, 76.42
Platforms 75.2, 75.5, 75.11.3, 77.9, 80.5, 80.8, 80.10 through 8.23, 81.11, 81.17
 Crossover 81.3, 81.5.1, 81.7.1, 81.7.5, 81.11
 Engine 81.4.1, 81.11
 Intermodal 83.1.13, 83.1.14, 83.3.3, 83.3.4
Pole Line 72.8, 78.1
Portable Welding Machines 79.23
Power Saw 71.2.6
Powder-Actuated Tools 71.2.6, 76.35
Punch 70.7.3, 76.9, 76.16

Q

Qualified 70.26, 72.7.1, 73.1, 74.2.1, 77.4, 78.6.1, 79.1, 79.20, Glossary

R

Radiators 72.14, 81.21.1
Radius, Boom 77.13
Rail 70.17, 71.5.2, 76.11, 76.19, 76.20, 76.21, 79.13, 79.24, 80.2, 81.1.1, 81.2.1, 81.4.2, 81.12, 81.13, 82.3, 82.8, 82.10, 82.11
Ramp Tractor 83.1.4
Ratchet 75.8, 76.21, 76.22, 81.11
Red Flag or Light 83.1.3
Reflectorized 83.1.1
Refrigeration 70.26
Regulator 79.4, 79.10, 79.14.3, 79.15, 79.16
Replace 71.1, 74.8, 76.39, 76.45.3, 77.19.3, 77.21.2, 77.21.3, 77.22.2, 77.23, 77.24.2, 77.25, 78.1, 79.2.1, 79.4, 79.17.1, 81.21.3, 81.22
Respiratory Equipment 70.21, 71.8, 79.3.2, 79.3.3, 79.6, 79.7.1
Retarders 71.2.3
Reverse Flow Device 79.17.2
Right to Know 70.24
Ring Test 76.45.2
Rings, Finger 71.6, 78.5, 81.21.2
Rigging
 Air Brake 81.19
 Crane/Hoist 77.2, 77.3, 77.9, 77.20 through 77.27
RoadRailer 81.4.3
Roadway Equipment 81.7.7, 81.18
Rollers 75.3, 81.15
Rope 77.27, 78.6.1, 78.9
 Wire 77.8, 77.11, 77.13, 77.19 through 77.22
Router 71.2.6
Running Board 76.5, 81.7.7, 81.21.1

S

Safe Lifting Capacity 77.14
Safety
 Appliance 76.5, 77.13, 81.3, 81.4.3
 Glasses 71.5
 Guards 76.3, 76.6, 76.39, 81.21.1
 Plugs 79.16.1
 Policies 70.1, 70.2
Safety Resource Manual 70.2, 70.5.1, 70.20, 70.21, 70.24, 71.1, 71.2, 71.3, 71.4, 71.5, 71.7, 71.8, 76.39, 77.17, 78.1, 78.10, 79.6, 79.7, 80.23
Sand Blasting 71.2.1

Saws 71.2.6, 76.36, 79.41, 76.42
Scaffold 79.25, 80.10, 80.12, 80.14, 80.16, 80.19, 80.22
Seals 72.7.1, 72.13.1, 81.9
Seat Belts 74.8, 74.17
Sewers 70.20, 79.7.1
Side Loader 83.1.7, 83.1.8
Signalman 78.8
Signs 70.14, 71.2, 78.10, 79.3.3, 79.14.1, 80.1, 81.21.3, 82.8, 83.1.4
Sill Step 81.3, 81.4.1, 81.7.1
Skids 75.5
Slack Action 81.7.2, 81.7.4, 81.20
Slings 77.3, 77.12, 77.20, 77.22 through 77.26
Slips, Trips, Falls 70.11, 75.2, 76.4, 76.5, 76.15, 77.12, 79.25, 80.1, 80.2, 80.23, 81.11, 81.13.6
Smoking 72.12, 72.14.1, 72.17, 73.4, 79.14.1, 90.3
Solvent 70.23, 72.16
Speed 74.3, 74.17, 75.11.3, 81.4.2, 81.10, 83.14
Spike Maul 76.11
Standing Equipment 81.2.2, 81.4, 81.5.1, 81.13
Storage 70.18, 70.25, 72.7.1, 72.12, 72.13, 72.14, 72.16, 74.5, 75.2, 76.4, 76.45.1, 77.19.4, 79.14.1, 79.17, 79.18, 79.26, 80.13, 83.3.1, 83.3.4
Storage Batteries 70.12, 74.19
Storage Tanks 72.12, 72.17.2
Spout 72.17, 81.17
Stairs 70.11, 72.5, 79.14.1, 80.3
Stanchion or Stands 74.16, 76.24
Standards 70.24, 71.7, 73.1, 79.3.3, 83.1.3
Steps 76.5, 80.12, 80.13, 81.3, 81.4.1, 81.7.1, 81.11, 81.20
Sticks 77.11, 76.42, 82.3
Stop Sign 77.5, 77.7, 83.1.4
Strobe 75.11.3, 81.21.3, 83.1.5
Swing Brake 77.10
Switches 70.10, 70.14, 81.2.1, 81.4.2, 82 section, 83.1.3
 Defective 82.4
 Electrical 78.8, 78.10, 79.23, 79.27
 Ground-Throw 82.7
 High-Stand 82.6
 Interlocking 82.10
 Main Battery 81.21
 Power 82.10
 Spiked 82.3, 82.5
 Spring 82.9
Switch Handle 82.3, 82.6, 82.7

Switch Point 82.2, 82.3, 82.10
Switch Point Locks 82.8
Switch Stand 82.6, 82.8

T

Tackle 77.3
Tag 70.14, 72.7.1, 72.13.1, 77.25, 79.14.4, 80.12, 81.21, 82.3 through 82.5
Tag Line 77.11
Talc 72.8, 79.17.2
Tank Car 79.3.2, 79.3.3, 81.7.5, 81.17
Tanks 70.20, 70.25, 72.12 through 72.17, 79.7.1, 79.8
Three-Point Contact 81.4.1, 81.5.1, 81.7.1, 81.7.4.1, 81.11
Tie-Down 83.2.2, 83.2.5
Ties 72.11, 76.20, 76.26, 81.4.2
Timber 70.12, 76.26
Tongs 76.26, 77.10
Torch 71.5.2, 79.2.1, 79.3, 79.4, 79.14.1, 79.16, 79.18, 79.19
Torpedoes 70.18
Toxic 70.22, Glossary
Tractor 75.7, 83.1.4, 83.1.6
Trailer 71.7, 74.5, 74.14 through 74.16, 75.6, 75.7, 76.11.3, 81.4.3, 83.1.6 through 83.1.8, 83.2
Trailing Foot 81.4.2
Train Dispatcher 72.9, 78.9, 81.3, 81.8.1, 81.18, 82.5
Transfer Plate 75.5
Transfer Table 80.9
Trench 80.8
Trespasser 70.9, 70.10
Trestle 70.19
Turntable 80.8, 80.9

U

Unattended 74.14, 75.11.4, 76.31, 76.40
Unauthorized 70.9, 70.18, 76.1, 82.1, 90.1
Uncoupling Lever 76.5, 81.6, 81.13
Uneven Load 81.17

V

Valve 70.14, 71.8, 72.13, 72.17.2, 76.26, 76.29, 79.4, 79.10, 79.14 through 79.18, 81.10.3
Vapors 70.21, 70.22, 71.5.2, 79.8, Glossary
Vats 79.7.1
Vehicles 70.8, 70.18, 70.21, 71.4, 71.5, 72.6, 72.7.1, 72.7.2, 72.17, 73.2, 74 section, 81.17, 83.1.4, 83.1.5, 83.2.3, 90.2
Vestibule 81.7.1, 81.7.6
Visitors 71.7

W

Walk Around 74.11
Walking Speed 81.4.2
Walkway 70.7.5, 70.11, 75.2, 80 section, 81.2.1, 81.20, 83.1.9, 83.1.14, 83.2.4
Water Flash Back Protection 72.21
Welding 71.2.6, 72.12, 76.2, 76.18, 76.45.3, 77.21.2, 77.21.3, 77.23.1, 77.25, 79 section
Wheel Chock 75.7, 81.12
Wheels
 Abrasive 71.2.6, 76.45
 Hand Brake 81.11
 Railroad 76.10, 76.23, 76.24, 82.9
 Scaffolding 80.22
 Vehicle or Trailer 74.16, 75.7, 75.11.3
Whistle 71.2.2, 81.10.3
Wire Rope 77.8, 77.11, 77.13, 77.19, 77.20, 77.21.2, 77.22
Wires 75.4, 76.13, 76.26, 76.32, 79.14.2, 79.17.2, 80.16
 Broken, Crossed, Dead 78.9
 High-Voltage 77.4, 78.9
Wiring 72.6
Work Train 77.16
Wrenches 76.8, 76.25, 76.32, 79.16.1
 Chuck 76.7
 Electrical Screw 83.2.4
Wristwatch 81.21.2

[^Top](#)

Updated: 4/28/2010